


MINIATURE SINGLE ROW BALL BEARINGS (SEALED - FLANGED) METRIC SERIES

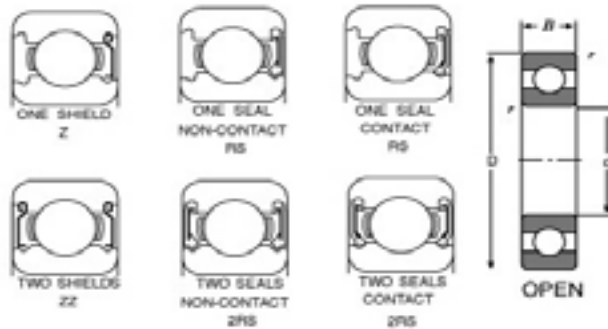

*In addition to Teflon seals, these sizes are available in Perbunan rubber seals (however, the RPM will be slowed)

RADIAL SEALED FLANGED BALL BEARINGS – METRIC SERIES					LOAD RATINGS (Lbs.)		
STD. BEARING NUMBER	GRW P/N	BORE d mm	OUTER DIAMETER D mm	WIDTH B mm	DYN C _r	STATIC C _{or}	RPM
F639/1.5-2RS	F69/1.5-2TS	1.5	6.5	2.6	192	59	71,000
F638/2-2RS	F682-2TS	1.5	6.1	2.3	192	59	71,000
F619/2-2RS	F692-2TS	2	7.5	2.3	286	90	65,000
F638/2.5-2RS	F68/2.5-2TS	2.5	7.1	2.6	289	92	61,000
F639/2.5-2RS	F69/2.5-2TS	2.5	8.5	3.5	432	149	53,000
F638/3-2RS	F683-2TS	3	8.1	3	432	149	53,000
F639/3-2RS	F693-2TS	3	9.5	4	644	215	51,000
F623-2RS	F623-2TS	3	11.5	4	725	265	44,000
F638/4-2RS	F684-2TS	4	10.3	4	658	226	45,000
	F684/10-2TS	4	11.5	4	658	226	45,000
F619/4-2RS	F694-2TS	4	12.5	4	730	271	41,000
F604-2RS	F604-2TS	4	13.5	4	734	282	37,000
F624-2RS	F624-2TS*	4	15	5	1,339	488	37,000
F634-2RS	F634-2TS	4	18	5	1,646	663	31,000
F638/5-2RS	F685-2TS	5	12.5	5	734	282	37,000
F619/5-2RS	F695-2TS	5	15	4	851	366	34,000
F605-2RS	F605-2TS	5	16	5	1,096	437	33,000
F625-2RS	F625-2TS	5	18	5	1,646	663	31,000
F635-2RS	F635-2TS	5	22	6	2,522	1,057	28,000
F628/6-2RS	F686-2TS	6	15	5	1,096	437	33,000
F619/6-2RS	F696-2TS	6	17	5	1,186	505	31,000
F626-2RS	F626-2TS*	6	22	6	2,522	1,057	34,000
F628/7-2RS	F687-2TS	7	16	5	1,186	505	31,000
F619/7-2RS	F697-2TS	7	19	5	1,795	776	28,000
F607-2RS	F607-2TS	7	22	6	2,522	1,057	28,000
F627-2RS	F627-2TS*	7	25	7	3,369	1,363	27,000
F638/8-2RS	F688-2TS	8	18	6	1,795	776	28,000
F619/8-2RS	F698-2TS	8	22	6	1,798	797	27,000
F608-2RS	F608-2TS*	8	25	7	3,369	1,363	27,000
F638/9-2RS	F689-2TS	9	19	6	1,798	797	27,000
F63800-2RS	F6800-2TS	10	21	7	1,922	915	25,000