





■ TSK Compact Rolled Ball Screws RBSS Series



呼び型番	ねじ軸		リード ℓ	巻方向	鋼鉄径	有効巻数	軸方向すきま
	外径 D	谷底径 d1					
RBSS1404-3.6	14	11.5	4	右	2.778	3.6	0.10
RBSS1405-2.6	14	11.2	5	右	3.175	2.6	0.10
RBSS1605-2.6	16	13.4	5	右	3.175	2.6	0.10
RBSS1808-3.6	18	14.4	8	右	4.763	3.6	0.10
RBSS2005-2.6	20	17.2	5	右	3.175	2.6	0.10
RBSS2010-2.6	20	16.6	10	右	4.763	2.6	0.15
RBSS2505-2.6	25	22.2	5	右	3.175	2.6	0.10
RBSS2510-5.3	25	20.2	10	右	6.350	5.3	0.20
RBSS2806-2.6	28	25.7	6	右	3.175	2.6	0.10
RBSS2806-5.3	28	25.7	6	右	3.175	5.3	0.10
RBSS3210-2.6	32	27.1	10	右	6.350	2.6	0.20
RBSS3210-5.3	32	27.1	10	右	6.350	5.3	0.20
RBSS3610-2.6	36	30.5	10	右	6.350	2.6	0.17
RBSS3610-5.3	36	30.5	10	右	6.350	5.3	0.17

● 呼び型番 (Code Name)

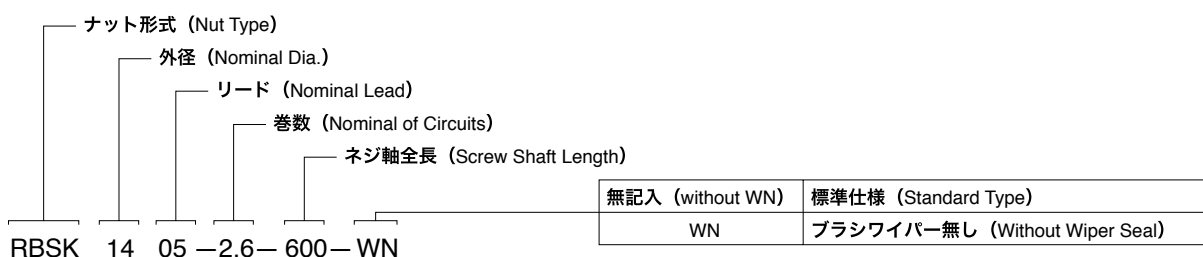

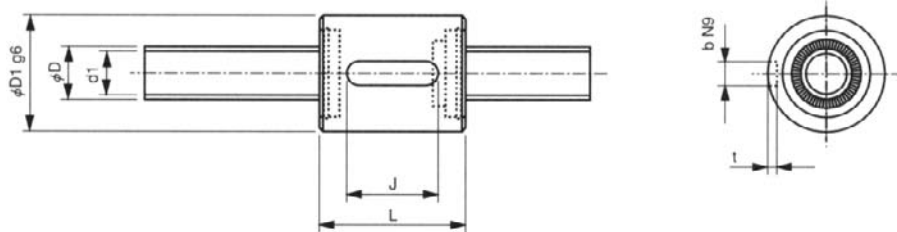

ナット寸法					基本定格荷重 kgf		標準軸長
D ¹	L	J	b	t	動定格 C	静定格 Co	
31	35	20	4	2.5	560	1170	600
32	36	20	4	2.5	510	1150	
34	36	20	5	3	550	1350	
50	56	32	6	3.5	1330	3160	1200
40	36	20	5	3	610	1650	
52	58	32	6	3.5	1080	2550	
43	36	20	5	3	680	2100	1000 1500 2000
60	94	50	8	4	3180	8500	
50	42	20	6	3.5	710	2350	
50	60	32	6	3.5	1300	4750	
67	64	32	8	4	2010	5450	
67	94	50	8	4	3670	10950	
70	64	32	8	4	2120	6100	
70	94	50	8	4	3850	12100	