


**FKB/FKS/FKSS/FKSSX/FKSSX-T
PRECISION SERIES**

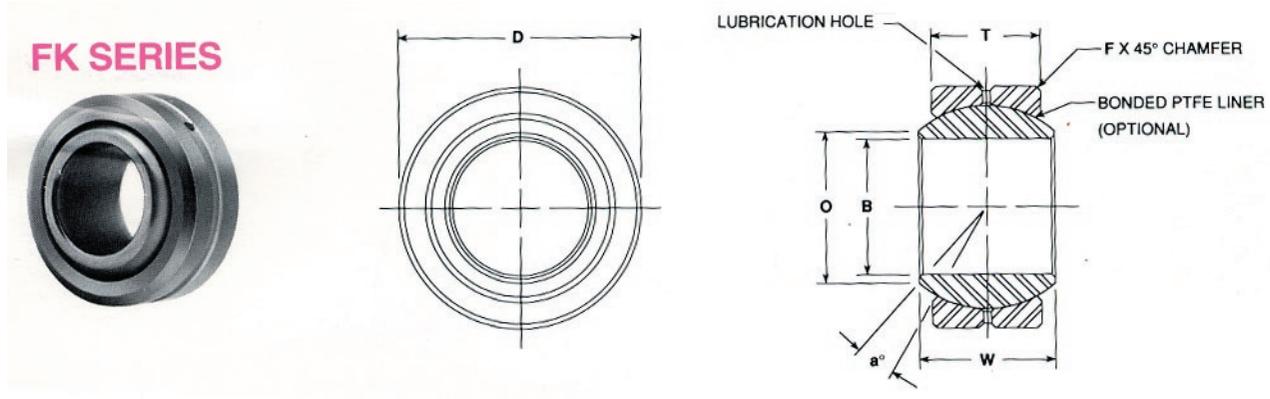

SIZE	BORE SIZE REF.	B DIA. +.0000 -.0005	D DIA. +.0000 -.0005	W WIDTH +.000 -.005	T WIDTH +/- .005	O DIA. REF.	BALL DIA. REF.	F CHAMFER REF.	a° MIS. ANG. REF.	APPROX. WEIGHT LBS.	RADIAL STATIC LOAD (LBS.)				
											FKB	FKS	FKSS	FKSSX	FKSSX-T
2	-	0.1650	0.4687	0.250	0.187	0.235	0.343	0.020	9	0.010	2,000	4,400	3,200	4,400	3,250
3	3/16	0.1900	0.5625	0.281	0.218	0.293	0.406	0.020	11	0.014	2,754	6,480	4,400	4,800	4,950
4	1/4	0.2500	0.6562	0.343	0.250	0.364	0.500	0.022	13.5	0.022	4,200	10,000	6,700	7,500	6,475
5	5/16	0.3125	0.7500	0.375	0.281	0.419	0.562	0.032	12	0.030	5,800	13,900	9,200	10,400	8,400
6	3/8	0.3750	0.8125	0.406	0.312	0.516	0.656	0.032	10	0.038	7,750	18,750	12,400	14,000	9,453
7	7/16	0.4375	0.9062	0.437	0.343	0.530	0.687	0.032	9.5	0.047	9,300	22,300	14,900	17,000	13,250
8	1/2	0.5000	1.0000	0.500	0.390	0.600	0.781	0.032	9.5	0.065	11,200	26,900	17,900	20,000	16,630
9	9/16	0.5625	1.0937	0.562	0.437	0.671	0.875	0.032	9.5	0.086	14,800	36,000	23,700	28,000	21,280
10	5/8	0.6250	1.1875	0.625	0.500	0.739	0.968	0.032	8.5	0.110	20,000	48,000	32,000	36,000	31,920
12	3/4	0.7500	1.4375	0.750	0.593	0.920	1.187	0.044	9	0.204	30,000	78,000	48,000	54,000	41,960
14	1	0.8750	1.5625	0.875	0.703	0.980	1.312	0.044	9.5	0.263	43,000	103,000	69,000	77,000	55,200
16	1	1.0000	1.7500	1.000	0.797	1.118	1.500	0.044	10	0.386	52,000	125,000	83,000	93,500	70,820