



# K SERIES SPECIAL PURPOSE

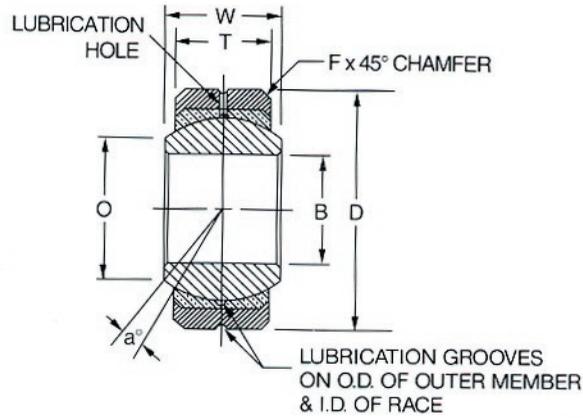

SIZE	B BORE	D OUTSIDE DIAMETER	W BALL WIDTH	H RACE WIDTH	O BALL FLAT	C CHAMFER	BALL DIA.	a° MIS. ANG.	MAXIMUM STATIC RADIAL LOAD	APPROX. WEIGHT
	+0.000 -0.005	+0.000 -0.005	+0.000 -0.005	+0.000 -0.005	REF.	+0.015 -0.000	REF.	REF.	LBS	LBS.
K3	0.1900	0.6250	0.281	0.187	0.293	0.016	0.406	16.5	2,961	0.02
K4	0.2500	0.7500	0.375	0.281	0.354	0.016	0.515	14.5	5,246	0.04
K5	0.3125	0.8750	0.437	0.313	0.447	0.016	0.625	14	6,554	0.05
K6	0.3750	1.0000	0.500	0.375	0.517	0.016	0.718	12.5	8,606	0.08
K7	0.4375	1.1875	0.562	0.437	0.586	0.032	0.812	11	11,100	0.12
K8	0.5000	1.3125	0.687	0.531	0.637	0.044	0.937	12.5	15,600	0.18
K10	0.6250	1.5625	0.875	0.687	0.802	0.044	1.187	12	25,700	0.33
K12	0.7500	2.2500	1.250	0.937	1.038	0.044	1.625	15	47,600	0.97
K16	1.0000	2.3750	1.125	0.875	1.345	0.062	1.750	10	48,200	0.94
K19	1.1875	2.6250	1.250	1.000	1.562	0.085	2.000	8.5	63,000	1.27
K24	1.5000	3.2500	1.500	1.250	2.000	0.085	2.500	7	98,000	2.38
K30	1.8750	4.0000	1.625	1.313	2.521	0.125	3.000	7	123,500	3.75