


Bearing Arrangement Options:







DF



DT

DB






DBT

DTBT

| Contact Angle | 18° Contact Angle |
|---------------------|----------------------------|
| Bearing Arrangement | Single - Universal Matched |
| Precision | P42 |
| Ring Material | SUJ2 Steel |
| Ball Material | Ceramic Si3N4 |
| Preload | Light Preload |
| Dynamic Load(Cr) | 3.93 lbs |
| Static Load(C0r) | 4.52 lbs |
| Speed Rating Grease | 22800 rpm |
| Speed Rating Oil | 35000 rpm |

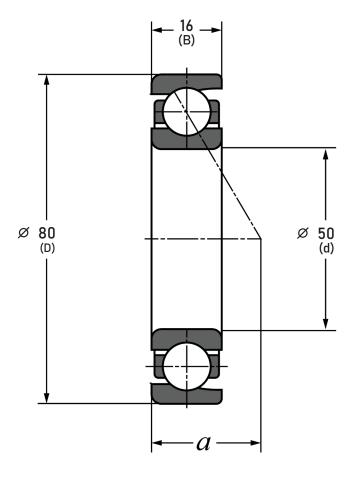

COMPONENT

SUPER PRECISION ANGULAR CONTACT



Pacific International Bearing, Inc. 33258 Central Ave, Union City, CA 94587 1-800-228-8895, 510-512-7000, info@pibsales.com www.pibsales.com www.pibsales.store

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. PIB makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.

5S1-HS010CE1T1G

50 mm x 80 mm x 16 mm, Angular Contact Bearing, 18° Contact Angle, Single – Universal Matched UNIT

mm

SHEET