


| Closure | Rubber Seal Non-Contact |
|-----------------------------|------------------------------|
| Ring Material | 52100 Chrome Steel |
| Ball Material | 52100 Chrome Steel |
| Precision | Abec 3 |
| Radial Clearance | Normal |
| Lubrication | L038 Mobil Polyrex EM Grease |
| Dynamic Load Capacity (Cr): | 6969.08 lbs |
| Static Load Capacity (Cor): | 4586.10 lbs |
| Max Speed Grease | 5300 nG |



COMPONENT

METRIC SERIES SEAL

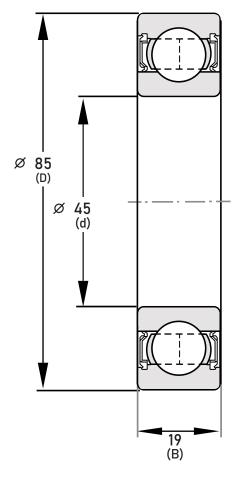

Pacific International Bearing, Inc. 33258 Central Ave, Union City, CA 94587 1-800-228-8895, 510-512-7000, info@pibsales.com www.pibsales.com www.pibsales.store

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. PIB makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.

6209-2RSR FAG BRAND

45mm x 85mm x 19mm, Single Row Radial, Deep Groove Bearing, Two Non Contact Rubber Seals UNIT

mm

SHEET