


Bearing Arrangement Options:







DF



DB






DBT

)	В٦	Γ			
,	_				

Contact Angle	15° Contact Angle	
Bearing Arrangement		
Precision	P4X	
Ring Material	SUJ2 Steel	
Ball Material	SUJ2 Steel	
Preload	Normal Preload	
Dynamic Load(Cr)	2.63 lbs	
Static Load(COr)	1.66 lbs	
Speed Rating Grease	32000 rpm	
Speed Rating Oil	48700 rpm	

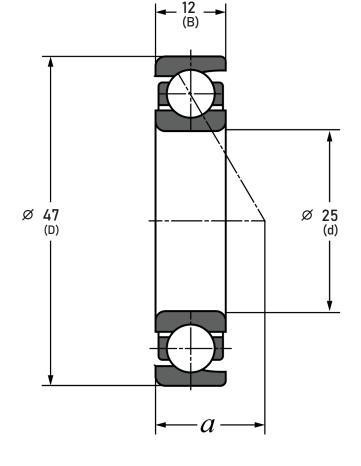

COMPONENT

SUPER PRECISION ANGULAR CONTACT



Pacific International Bearing, Inc. 33258 Central Ave, Union City, CA 94587 1-800-228-8895, 510-512-7000, info@pibsales.com www.pibsales.com

www.pibsales.store

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. PIB makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.

7005CD2G/GNP4X/

25 mm x 47 mm x 12 mm, Angular Contact Bearing, 15° Contact Angle UNIT

mm

SHEET