




## Bearing Arrangement Options:




DB




DF




DT



DBT



DTBT

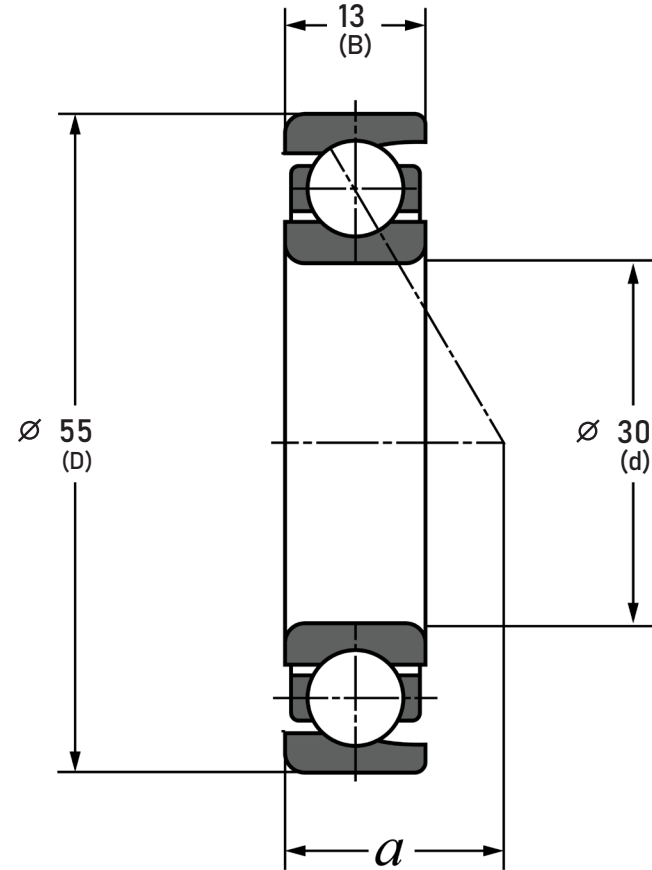

Contact Angle	15° Contact Angle
Bearing Arrangement	Single - Universal Matched
Precision	P4X
Ring Material	SUJ2 Steel
Ball Material	SUJ2 Steel
Preload	Normal Preload
Dynamic Load(Cr)	3.39 lbs
Static Load(C0r)	2.32 lbs
Speed Rating Grease	27100 rpm
Speed Rating Oil	41200 rpm

COMPONENT	SUPER PRECISION ANGULAR CONTACT	
<b>7006CG/GNP4X</b> <b>TPI</b> 30 mm x 55 mm x 13 mm, Angular Contact Bearing, 15° Contact Angle, Single - Universal Matched	UNIT	
	mm	
	SHEET	



Pacific International Bearing, Inc.  
33258 Central Ave, Union City, CA 94587  
1-800-228-8895, 510-512-7000,  
[info@pibsales.com](mailto:info@pibsales.com)  
[www.pibsales.com](http://www.pibsales.com)  
[www.pibsales.store](http://www.pibsales.store)

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. PIB makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.