




S...1)

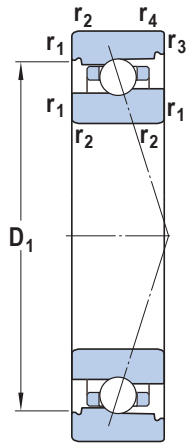


ACB, CB

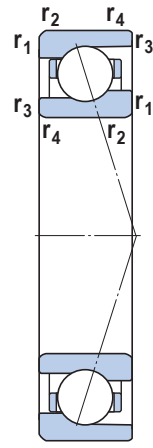

719..ACE,  
719..CE

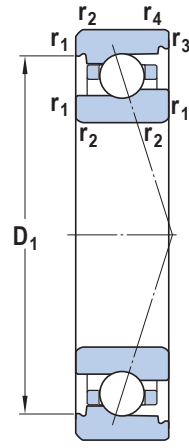

70..ACE,  
70..CE

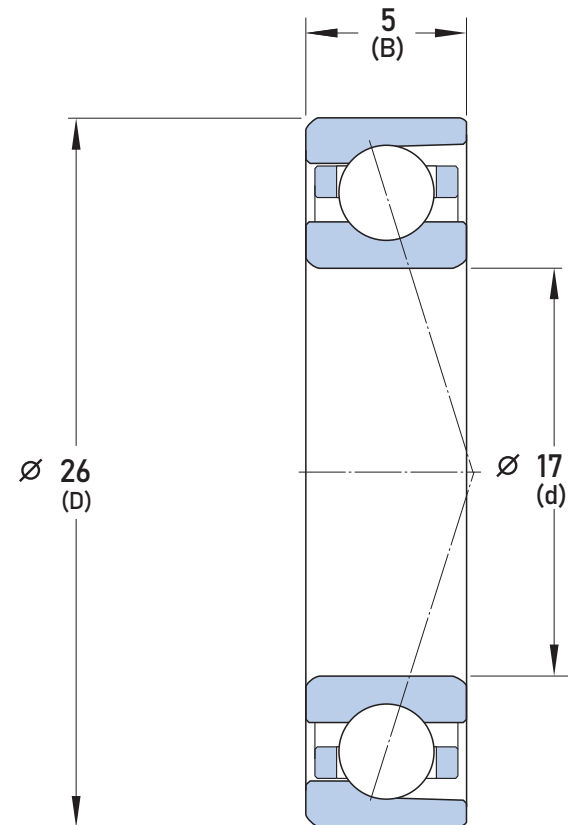

ACD, CD

|                            |                          |
|----------------------------|--------------------------|
| Contact Angle              | 15° High-Capacity Design |
| Bearing Arrangement        | Pair - Universal Matched |
| Precision                  | P4                       |
| Ring Material              | Chrome Steel 100Cr6      |
| Ball Material              | Chrome Steel 100Cr6      |
| Preload                    | Light Preload            |
| Dynamic Load Capacity(Cr)  | 526.05 lbs               |
| Static Load Capacity (C0r) | 359.70 lbs               |
| Speed Rating Grease        | 53,000 rpm               |
| Speed Rating Oil           | 85,000 rpm               |

| COMPONENT | SUPER PRECISION ANGULAR CONTACT |
|-----------|---------------------------------|
|-----------|---------------------------------|



Pacific International Bearing, Inc.  
33258 Central Ave, Union City, CA 94587  
1-800-228-8895, 510-512-7000,  
info@pibsales.com  
www.pibsales.com  
www.pibsales.store

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. PIB makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.

|   |       |
|---|-------|
| <p><b>71803 CD/P4ADGA</b><br/><b>SKF</b><br/>17 mm x 26 mm x 5 mm,<br/>Angular Contact Bearing, 15° Contact Angle,<br/>Pair - Universal Matched</p> | UNIT  |
|   | mm    |
|   | SHEET |