


70..ACE,

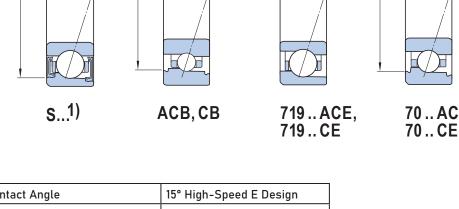

	12 (B)
Ø 72 (D)	Ø 50 (d)
•	

ACD, CD

Contact Angle **Bearing Arrangement** Pair - Universal Matched Precision P4A Ring Material Chrome Steel 100Cr6 Ball Material Ceramic Si3N4 Preload Light Preload Dynamic Load Capacity(Cr) 2855.07 lbs Static Load Capacity (COr) 1944.60 lbs Speed Rating Grease 32,000 rpm Speed Rating Oil 48,000 rpm

COMPONENT

SUPER PRECISION ANGULAR CONTACT



Pacific International Bearing, Inc. 33258 Central Ave, Union City, CA 94587 1-800-228-8895, 510-512-7000, info@pibsales.com www.pibsales.com www.pibsales.store

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. PIB makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.

71910 CE/HCP4ADGA **SKF**

50 mm x 72 mm x 12 mm, Angular Contact Bearing, 15° Contact Angle, Pair - Universal Matched

UNIT

mm

SHEET