


70 .. ACE, 70 .. CE



719..ACE, 719..CE

15° High-Capacity Design Contact Angle **Bearing Arrangement** Pair - Universal Matched Precision P4A Ring Material Chrome Steel 100Cr6 Ball Material Chrome Steel 100Cr6 Preload Extra Light Preload Dynamic Load Capacity(Cr) 1665.83 lbs Static Load Capacity (COr) 753.11 lbs **Speed Rating Grease** 48,000 rpm Speed Rating Oil 70,000 rpm

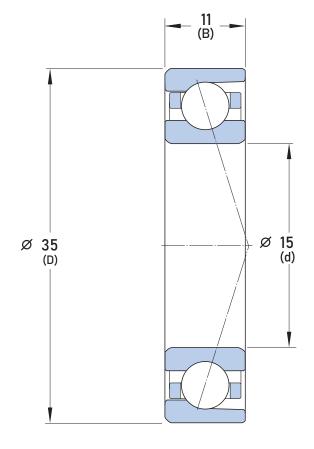

ACD, CD

COMPONENT

SUPER PRECISION ANGULAR CONTACT



Pacific International Bearing, Inc. 33258 Central Ave, Union City, CA 94587 1-800-228-8895, 510-512-7000, info@pibsales.com www.pibsales.com www.pibsales.store This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. PIB makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.

7202 CD/P4ADGA SKF

15 mm x 35 mm x 11 mm, Angular Contact Bearing, 15° Contact Angle, Pair - Universal Matched UNIT

mm

SHEET