




Bearing Arrangement Options:




DB




DF




DT



DBT



DTBT

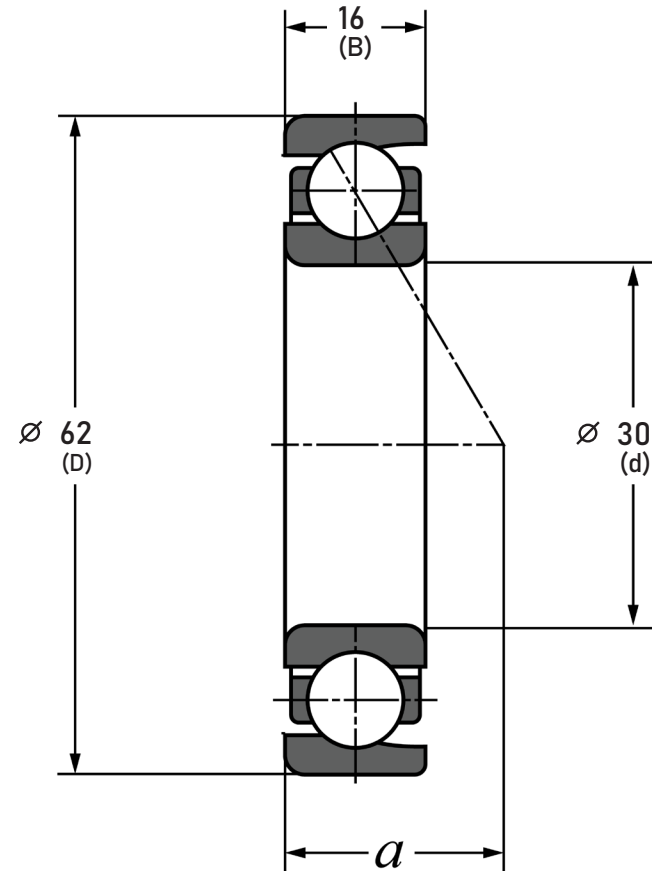

| | |
|---------------------|----------------------------|
| Contact Angle | 15° Contact Angle |
| Bearing Arrangement | Single - Universal Matched |
| Precision | P4X |
| Ring Material | SUJ2 Steel |
| Ball Material | SUJ2 Steel |
| Preload | Normal Preload |
| Dynamic Load(Cr) | 5.17 lbs |
| Static Load(C0r) | 3.30 lbs |
| Speed Rating Grease | 18900 rpm |
| Speed Rating Oil | 24500 rpm |

| COMPONENT | SUPER PRECISION ANGULAR CONTACT | |
|--|---------------------------------|--|
| 7206CG/GNP4X TPI 30 mm x 62 mm x 16 mm, Angular Contact Bearing, 15° Contact Angle, Single - Universal Matched | UNIT | |
| | mm | |
| | SHEET | |



Pacific International Bearing, Inc.
33258 Central Ave, Union City, CA 94587
1-800-228-8895, 510-512-7000,
info@pibsales.com
www.pibsales.com
www.pibsales.store

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. PIB makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.