



**S...1)**




**ACB, CB**

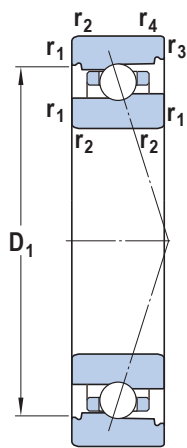

**719..ACE,  
719..CE**

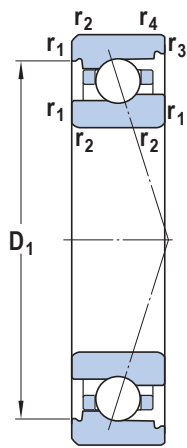

**70..ACE,  
70..CE**

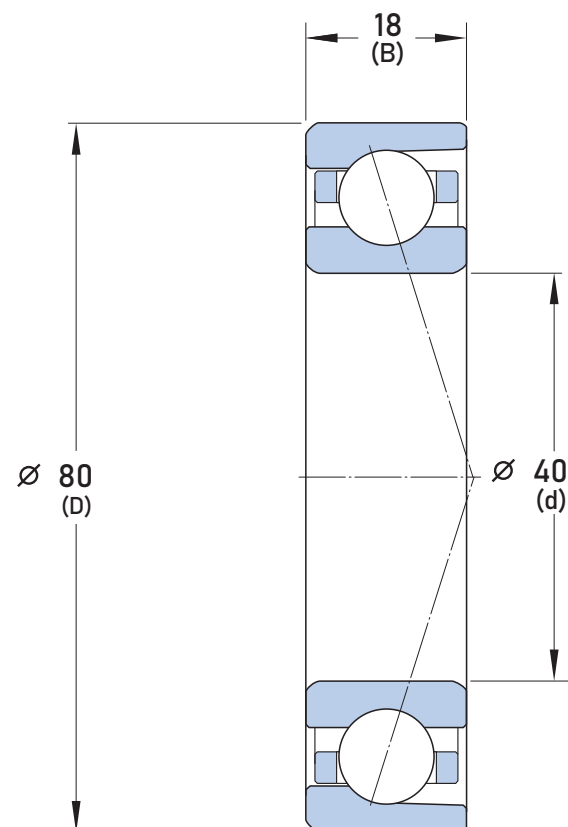

**ACD, CD**

Contact Angle	15° High-Capacity Design
Bearing Arrangement	Pair - Universal Matched
Precision	P4A
Ring Material	Chrome Steel 100Cr6
Ball Material	Chrome Steel 100Cr6
Preload	Extra Light Preload
Dynamic Load Capacity(Cr)	7598.54 lbs
Static Load Capacity (C0r)	5395.43 lbs
Speed Rating Grease	18,000 r/min
Speed Rating Oil	30,000 r/min



Pacific International Bearing, Inc.  
33258 Central Ave, Union City, CA 94587  
1-800-228-8895, 510-512-7000,  
info@pibsales.com  
www.pibsales.com  
www.pibsales.store

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. PIB makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.

COMPONENT	SUPER PRECISION ANGULAR CONTACT	
<b>7208 CD/P4ADGA</b>  <b>SKF</b>  40 mm x 80 mm x 18 mm, Angular Contact Bearing, 15° Contact Angle, Pair - Universal Matched	UNIT	
	mm	
	SHEET	