


| Closure                     | Metallic Shield           |
|-----------------------------|---------------------------|
| Ring Material               | AISI 440C Stainless Steel |
| Ball Material               | AISI 440C Stainless Steel |
| Precision                   | ABEC 1                    |
| Radial Clearance            | P25 (Standard)            |
| Lubrication                 | L01 Ester Oil             |
| Dynamic Load Capacity (Cr): | 127 lbs                   |
| Static Load Capacity (Cor): | 41 lbs                    |
| Max Speed Grease x 1000 rpm | 70                        |
| Max Speed Oil x 1000 rpm    | 82                        |
| Ball Compliment No. Z       | 6                         |
| Ball Compliment Size Dw     | 1.588                     |



COMPONENT

**EXTENDED INNER RING** 

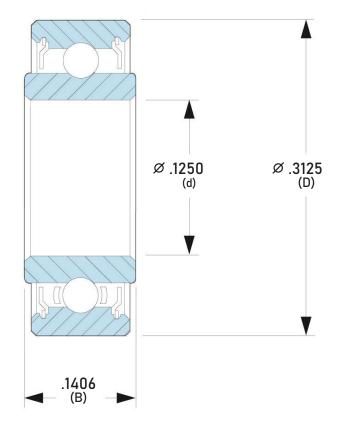

Pacific International Bearing, Inc. 33258 Central Ave, Union City, CA 94587 1-800-228-8895, 510-512-7000, info@pibsales.com www.pibsales.com www.pibsales.store

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. PIB makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.

## DDRI-518ZZEEZZRA1P25L01

**NMB BRAND** 

.1250 in x .3125 in x .1406 in, Miniature Instrument Deep, Groove Radial Ball Bearing, Two Metal Shields UNIT

INCH

SHEET