


Bearing Arrangement Options:







DF










DBT

ct Angle	18° Contact Angle
ng Arrangement	Single - Universal Matched
ion	P4X
1aterial	SUJ2 Steel
aterial	SUJ2 Steel
nd	Light Preload

Contact Angle	18° Contact Angle
Bearing Arrangement	Single - Universal Matched
Precision	P4X
Ring Material	SUJ2 Steel
Ball Material	SUJ2 Steel
Preload	Light Preload
Dynamic Load(Cr)	1.08 lbs
Static Load(C0r)	1.1 lbs
Speed Rating Grease	33500 rpm
Speed Rating Oil	51600 rpm

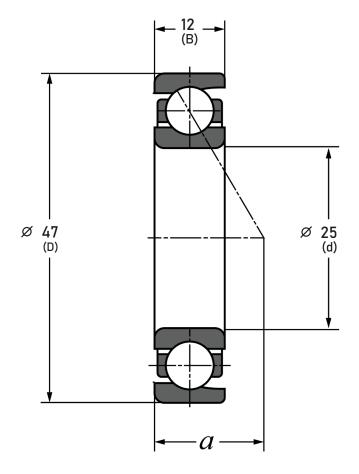

COMPONENT

SUPER PRECISION ANGULAR CONTACT



Pacific International Bearing, Inc. 33258 Central Ave, Union City, CA 94587 1-800-228-8895, 510-512-7000, info@pibsales.com www.pibsales.com www.pibsales.store

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. PIB makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file information or for the use of the file, information or specifications.

HS005CE1T1LLBG/GLP4X

TPI

25 mm x 47 mm x 12 mm, Angular Contact Bearing, 18° Contact Angle, Single - Universal Matched

UNIT

mm

SHEET