



## **Bearing Arrangement Options:**






DF








DBT

| Contact Angle       | 18° Contact Angle        |
|---------------------|--------------------------|
| Bearing Arrangement | Pair - Universal Matched |
| Precision           | P4X                      |
| Ring Material       | SUJ2 Steel               |
| Ball Material       | SUJ2 Steel               |
| Preload             | Light Preload            |
| Dynamic Load(Cr)    | 3.93 lbs                 |
| Static Load(COr)    | 4.52 lbs                 |
| Speed Rating Grease | 22800 rpm                |

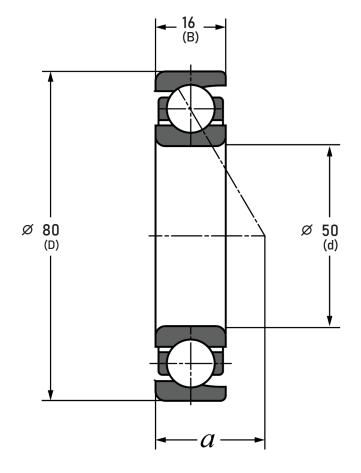

**COMPONENT** 

SUPER PRECISION ANGULAR CONTACT



Speed Rating Oil

Pacific International Bearing, Inc. 33258 Central Ave, Union City, CA 94587 1-800-228-8895, 510-512-7000, info@pibsales.com www.pibsales.com www.pibsales.store

35000 rpm

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. PIB makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file information or for the use of the file, information or specifications.

## HS010CE1T1LLBD2G TPI

50 mm x 80 mm x 16 mm, Angular Contact Bearing, 18° Contact Angle, Pair - Universal Matched

UNIT

mm

**SHEET**