


Closure	Metallic Shield Pressed
Closure	Metattic Silietu Fresseu
Ring Material	52100 Chrome Steel
Ball Material	52100 Chrome Steel
Precision	ABEC 1
Radial Clearance	P58
Lubrication	LY121 Kyodo Yushi SRL Grease
Dynamic Load Capacity (Cr):	390 lbs
Static Load Capacity (Cor):	152 lbs
Max Speed Grease x 1000 rpm	44
Max Speed Oil x 1000 rpm	52
Ball Compliment No. Z	7
Ball Compliment Size Dw	7/64



COMPONENT

METRIC SERIES SHIELDED

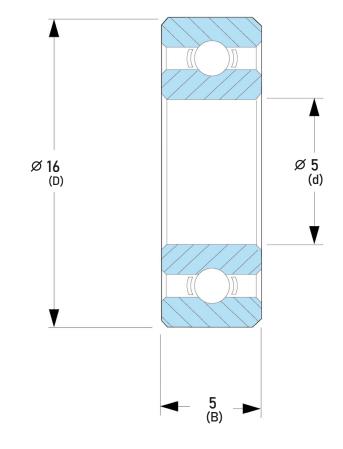

Pacific International Bearing, Inc. 33258 Central Ave, Union City, CA 94587 1-800-228-8895, 510-512-7000, info@pibsales.com www.pibsales.com www.pibsales.store

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. PIB makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.

R-1650HHRA1 P58LY121

NMB BRAND

5mm x 16mm x 5mm, Miniature Instrument Deep, Groove Radial Ball Bearing, Non-Removable Metallic Shield UNIT

mm

SHEET