


Industrial Brakes

Brake Calipers • Clamping Units

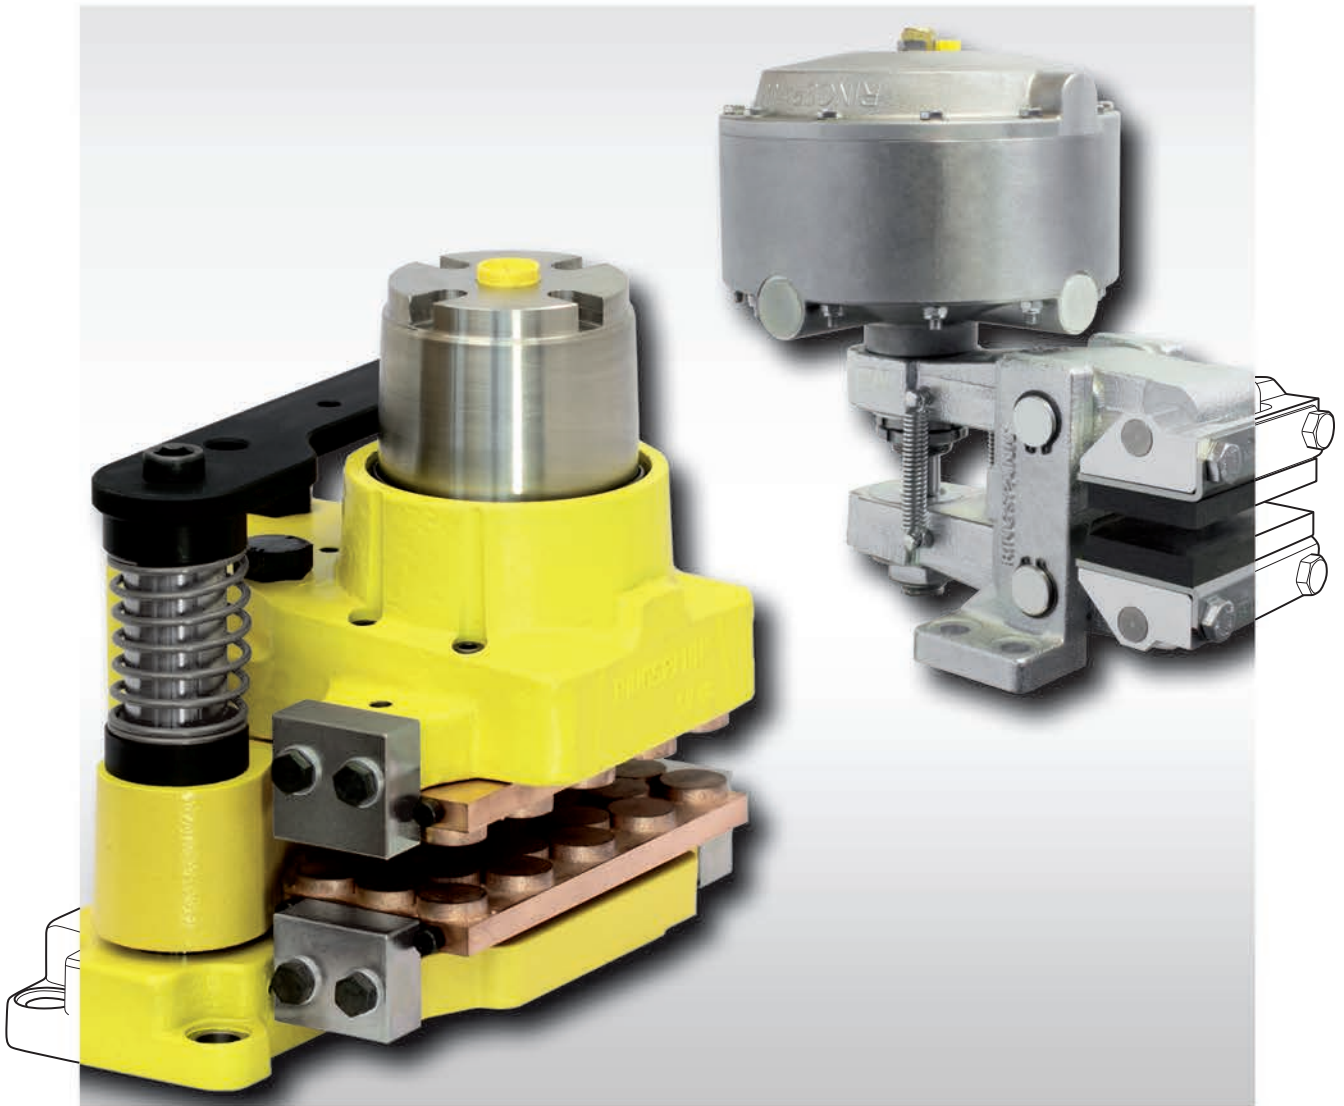

Edition 2022/2023

Table of Contents 1/2

Brake Technology Introduction										Page	
Design and Function of Brakes										6	
Areas of Application for Brakes										7	
Type	Design: S = Disc Brake T = Drum Brake	Braking torque* [Nm]					Type of mounting brake at machine		Adjustment in case of friction block wear		Page
		10 ²	10 ³	10 ⁴	10 ⁵	10 ⁶	Parallel to brake disc	At right angles to brake disc	Manual	Auto- matic	
Brake Calipers spring activated – pneumatically released											
DH 010 FPM	S	10 - 50						●	●		9
DV 020 FPM / DH 020 FPM	S	97 - 650					●	●	●		10
DH 025 FPM	S	240 - 1 900						●	●		12
DH 025 FPA	S	150 - 1 700						●		●	14
DV 030 FPM / DH 030 FPM	S	270 - 2 500					●	●	●		16
DV 030 FPA / DH 030 FPA	S	150 - 2 500					●	●		●	20
DV 035 FPM / DH 035 FPM	S	430 - 5 750					●	●	●		24
DV 035 FPA / DH 035 FPA	S	230 - 5 450					●	●		●	28
DU 060 FPM	S	2 700 - 38 500					●	●	●		32
Brake Calipers spring activated – hydraulically released											
DV 020 FHM / DH 020 FHM	S	200 - 650					●	●	●		34
DV 030 FHM / DH 030 FHM	S	620 - 2 000					●	●	●		36
DV 030 FHA / DH 030 FHA	S	620 - 2 000					●	●		●	38
DV 035 FHM / DH 035 FHM	S	1 500 - 4 700					●	●	●		40
DV 035 FHA / DH 035 FHA	S	1 500 - 4 700					●	●		●	42
DU 060 FHM	S	2 700 - 38 500					●	●	●		44
Brake Calipers spring activated – electromagnetically released											
DH 012 FEM	S	110 - 340						●	●		46
DV 020 FEM	S	190 - 630					●		●		47
EV 018 FEM / EH 018 FEM	S	100 - 400					●	●	●		48
EV 024 FEM / EH 024 FEM	S	400 - 1 160					●	●	●		50
EV 028 FEM / EH 028 FEM	S	940 - 2 580					●	●	●		52
EV 038 FEM / EH 038 FEM	S	2 830 - 6 590					●	●	●		54
Brake Calipers spring activated – electrohydraulically released											
DS 160 FEA	S	200 - 600								●	56
DS 230 FEM / DS 230 FEA	S	250 - 1 600							●	●	58
DS 280 FEM / DS 280 FEA	S	1 200 - 8 100							●	●	62
DS 370 FEM / DS 370 FEA	S	2 950 - 22 400							●	●	66
Brake Calipers spring activated – electrohydraulically released											
DT 200 FE NC	T	230 - 310							●	●	70
DT 200 FEA ... ST	T	250 - 330								●	74
DT 250 FE NC	T	260 - 700							●	●	76
DT 250 FEA ... ST	T	300 - 750								●	80
DT 315 FE NC	T	285 - 1 700							●	●	82
DT 315 FEA ... ST	T	350 - 1 800								●	86
DT 400 FE NC	T	525 - 2 075							●	●	88
DT 400 FEA ... ST	T	680 - 2 500								●	92
DT 500 FE NC	T	2 500 - 4 170							●	●	94
DT 500 FEA ... ST	T	1 600 - 5 120								●	98
DT 630 FEA ... ST	T	3 100 - 7 200								●	100
Brake Calipers spring activated – manually released											
DV 020 FKM / DH 020 FKM	S	160 - 510					●	●	●		102

* The braking torques relate to the standard brake discs shown in this catalogue. Higher braking torques are possible by the use of several brake calipers or larger brake disc diameters.

Type	Design: S = Disc Brake T = Drum Brake	Braking torque* [Nm]					Type of mounting brake at machine		Adjustment in case of friction block wear		Page
		10 ²	10 ³	10 ⁴	10 ⁵	10 ⁶	Parallel to brake disc	At right angles to brake disc	Manual	Auto- matic	
Brake Calipers pneumatically activated – spring released											
DH 005 PFK	S	0,5 - 15						●			105
DH 010 PFK	S	3 - 80						●			106
DH 015 PFK	S	17 - 430						●			107
DV 020 PFK / DH 020 PFK	S	25 - 650					●	●			108
DH 025 PFM	S	55 - 2 600						●	●		110
DV 030 PFM / DH 030 PFM	S	55 - 2 600					●	●	●		112
DV 035 PFM / DH 035 PFM	S	89 - 5 100					●	●	●		116
DU 060 PFM	S	371 - 26 900					●	●	●		120
Brake Calipers electromagnetically activated – spring released											
EV 018 EFM / EH 018 EFM	S	100 - 400					●	●	●		122
EV 024 EFM / EH 024 EFM	S	440 - 1 270					●	●	●		124
EV 028 EFM / EH 028 EFM	S	1 170 - 3 220					●	●	●		126
EV 038 EFM / EH 038 EFM	S	3 400 - 7 910					●	●	●		128
Brake Calipers manually activated – manually released											
DH 010 MSM	S	20 - 75						●	●		131
DV 020 MSM / DH 020 MSM	S	160 - 520					●	●	●		132
DV 020 MKM / DH 020 MKM	S	20 - 600					●	●	●		134



* The braking torques relate to the standard brake discs shown in this catalogue. Higher braking torques are possible by the use of several brake calipers or larger brake disc diameters.

Table of Contents 2/2

Type	Design: S = Disc Brake T = Drum Brake	Braking torque* [Nm]					Type of mounting brake at machine		Adjustment in case of friction block wear		Page
		10 ²	10 ³	10 ⁴	10 ⁵	10 ⁶	Parallel to brake disc	At right angles to brake disc	Manual	Auto- matic	
Brake Calipers spring activated – hydraulically released											
HS 075 FHM	S	1 500 - 40 500									136
HW 075 FHM	S	1 500 - 40 500									138
HS 120 FHM	S	8 400 - 182 400									140
HW 120 FHM	S	8 400 - 182 400									142
HS 145 FHM-270 ... - ...	S	54 900 - 403 200									144
HW 145 FHM	S	54 900 - 403 200									148
HS 165 FHM-420 ... - ...	S	97 700 - 631 000									150
HW 165 FHM	S	97 700 - 631 000									154
HS 215 FHM-560 ... - ...	S	164 400 - 831 100									156
HW 215 FHM	S	164 400 - 831 100									160
Brake Calipers hydraulically activated – non-releasing											
HI 180 HUK	S	15 230 - 325 000									162
HW 180 HUK	S	15 230 - 325 000									164
Brake Calipers hydraulically activated – spring released											
HW 040 HFA	S	84 - 1 200									166
HW 063 HFA	S	320 - 4 700									167
HS 075 HFK	S	740 - 40 500									168
HW 075 HFK	S	740 - 40 500									170
HW 100 HFA	S	1 300 - 18 400									172
HS 120 HFK	S	4 400 - 197 600									174
HW 120 HFK	S	4 400 - 197 600									176
HW 180 HFA	S	10 000 - 153 500									178
Clamping Units spring activated – hydraulically or pneumatically released											
KE ... FHK											192
KE ... FPK											194



* The braking torques relate to the standard brake discs shown in this catalogue. Higher braking torques are possible by the use of several brake calipers or larger brake disc diameters.

Brake Calipers Accessories

Brake Calipers Accessories	Page
Brake Discs	180
Friction Block Wear Control	184
Universal Transformer	184
RCS® Pull Cable	185
RCS® Hand Brake Lever	185
Control System BCS 600	186
Hydraulic Power Unit	190
Pneumatic Cabinet	190



Brake Technology Details

Brake Technology Details	Page
Technical Points Brake Discs	183
Technical Points Brake Calipers	196
Technical Points Clamping Units	197
Questionnaire for selecting Brake Calipers and Questionnaire for selecting Clamping Units	198

Online Calculation Tool Brakes at www.ringspann.com

The RINGSPANN Calculation Tool has been developed to work out the right and time-efficient dimensioning of an optimal brake.

- Calculation Tool for the calculation of braking torque or braking force during deceleration, control and holding
- Mass calculation of simple bodies
- Moment of Inertia
- Downloading of relevant product information
- Downloading of CAD models



No Drives without Disc Brakes

For a long time now Disc Brakes have been tried and tested in the aviation and automotive industry, and increasing awareness of operatio-

nal safety and ever stricter rules on accident prevention have made them indispensable. After all, wherever there is acceleration, there

must also be braking. A reliable and economic solution to these problems are RINGSPANN Disc Brakes.

Advantages of RINGSPANN Disc Brakes

The following features make the RINGSPANN Disc Brakes unique:

- The well thought-out design of RINGSPANN Disc Brakes permits a **simple and space-saving arrangement**, even in existing installations.
- The open design of the RINGSPANN Disc Brakes with their excellent ventilation characteristics provides **ideal heat dissipation**; this is a precondition for high braking power with a compact design.
- Highly wear-resistant friction material and large braking surfaces ensure long intervals between maintenance. The practical and robust design of RINGSPANN Disc Brakes makes that **maintenance easy and uncomplicated**. The friction pads are easily replaced without the need to remove the brake.
- RINGSPANN Disc Brakes are fitted with **swivel mounted friction blocks**; this ensures that the friction blocks are always in full face contact with the brake disc. When the brake is released, the friction blocks are lifted safely off the disc by a spring, irrespective of the installation arrangement.

For each Application the right Solution

RINGSPANN Disc Brakes require minimal installation space. Brake Calipers or Brake Saddles may be arranged in any position on brake discs of varying diameters. By using several Brake Calipers on the same disc it is possible to increase the braking torque without the need to enlarge the installation space.

The universal concept of the RINGSPANN Disc Brake fulfills various functions:

- **Stopping brake**
- **Control brake**
- **Holding brake**

As a **stopping brake**, it brings a rotating shaft to a standstill in a short time, for example during a power failure or an emergency stop.

As a **control brake**, it effectively maintains material tension.

As a **holding brake**, it prevents the unintended start of a stationary shaft.

The Product Range

RINGSPANN offers a comprehensive range of Disc Brakes:

- **Spring activated Brake Calipers**; release is either pneumatic, hydraulic, electromagnetic or manual by means of a pull cable
- **Pneumatically activated Brake Calipers**; spring released
- **Manually activated Brake Calipers**; manually released with a hand wheel or a pull cable
- **Hydraulically activated Brake Calipers**; spring released
- **Spring activated Clamping Unit**; hydraulically or pneumatically released

Accessories

Accessories are available for special applications:

- Two standard types of **brake discs** are available with diameters ranging from 125 mm up to 1 000 mm
- All brakes can be supplied with an **electric indicator for friction block wear**
- Inductive proximity switches for **monitoring the operating condition** "brake released" are available
- To prolong the operating life, **friction blocks with double the friction surface** are available for Brake Calipers sizes 12, 15, 20 and 30
- **Special friction linings** are available for special requirements

Amusement rides

Assembly stations

Belt conveyors

Construction machines

Cranes

Drive units

Elevators and escalators

Extruder, machines for rubber and plastics

Fans and ventilators

Foundry machines

Machines for food industry

Packaging machines

Paper machines

Printing machines

Ship drives

Shredders

Steel mills


Stranding lines

Test benches


Textile machines

Wind turbines


Wire and tube machines

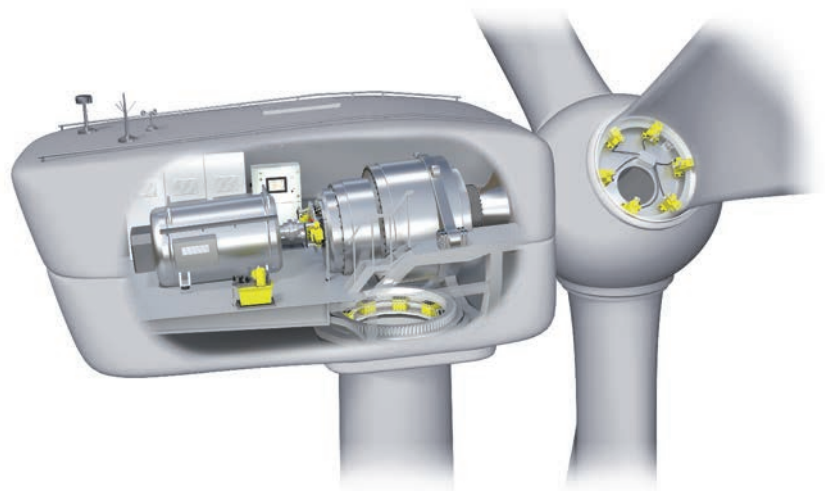


Wind turbines

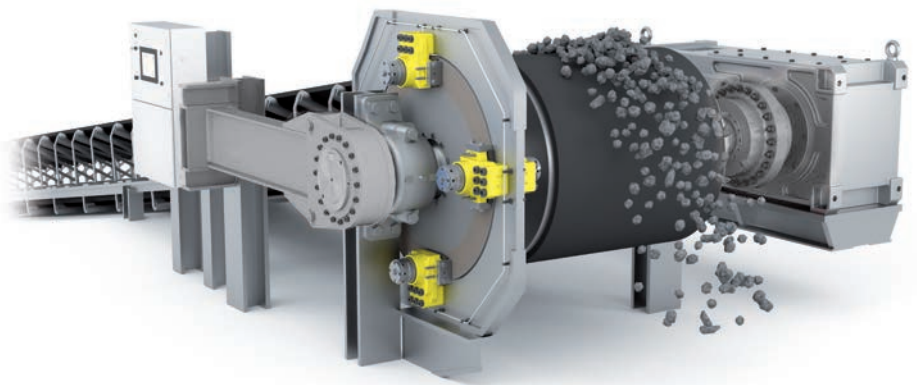

Belt conveyors

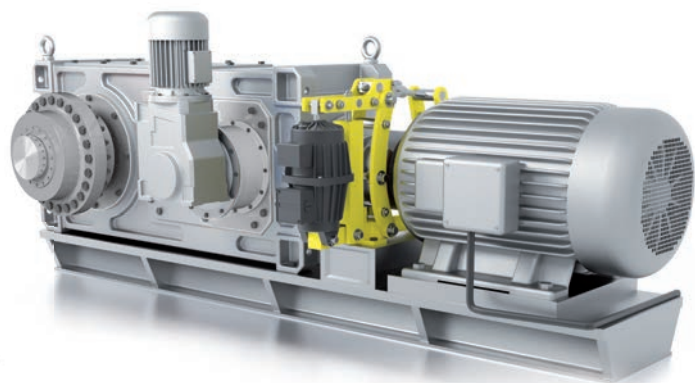

Drive units

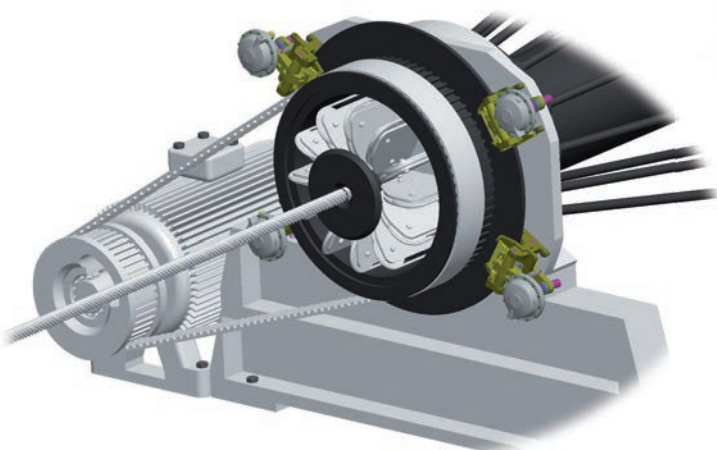

Stranding lines

Handwriting practice area with 20 horizontal lines.

Graph paper area with a grid of 20 columns and 20 rows.

Brake Caliper DH 010 FPM

spring activated – pneumatically released




Features	Code
Brake Caliper	D
Mounting to the machine at right angles to the brake disc	H
Frame size 010	010
Spring activated	F
Pneumatically released	P
Manual adjustment to accommodate friction block wear	M
Designs 010 or 012 are available	010 012
Piston mounted in central position	M
Thickness of brake disc 12,5 mm	12

Example for ordering

Brake Caliper DH 010 FPM, design 010, piston mounted in central position, thickness of brake disc 12,5 mm:

DH 010 FPM - 010 M - 12

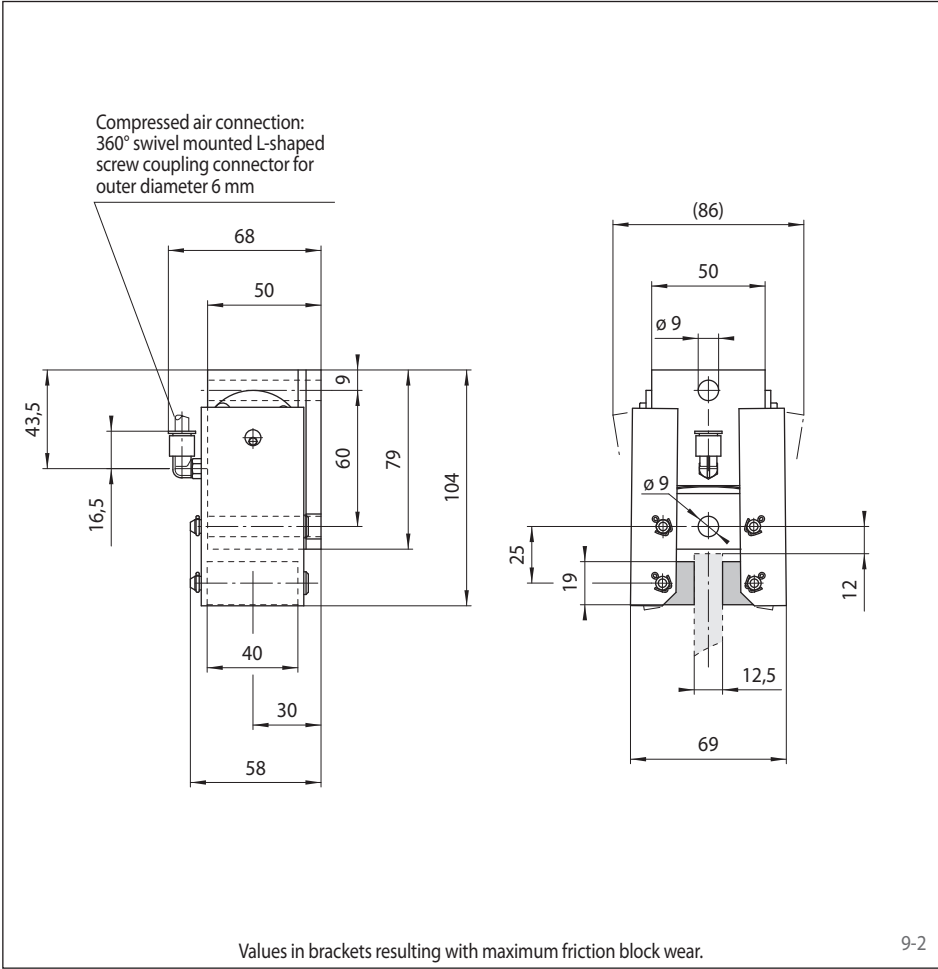


Technical Data

	Brake Caliper DH 010 FPM	
	with design 010	with design 012
Brake disc diameter	Braking torque	Braking torque
mm	Nm	Nm
125	10	15
150	14	19
200	20	26
250	26	34
300	32	41
355	38	50
Clamping force	290 N	375 N
Air pressure	min. 4 bar max. 8 bar	min. 5 bar max. 8 bar
Air volume per activation	max. 3 cm ³	max. 3 cm ³
Weight	1 kg	1 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Brake Caliper DV 020 FPM

spring activated – pneumatically released

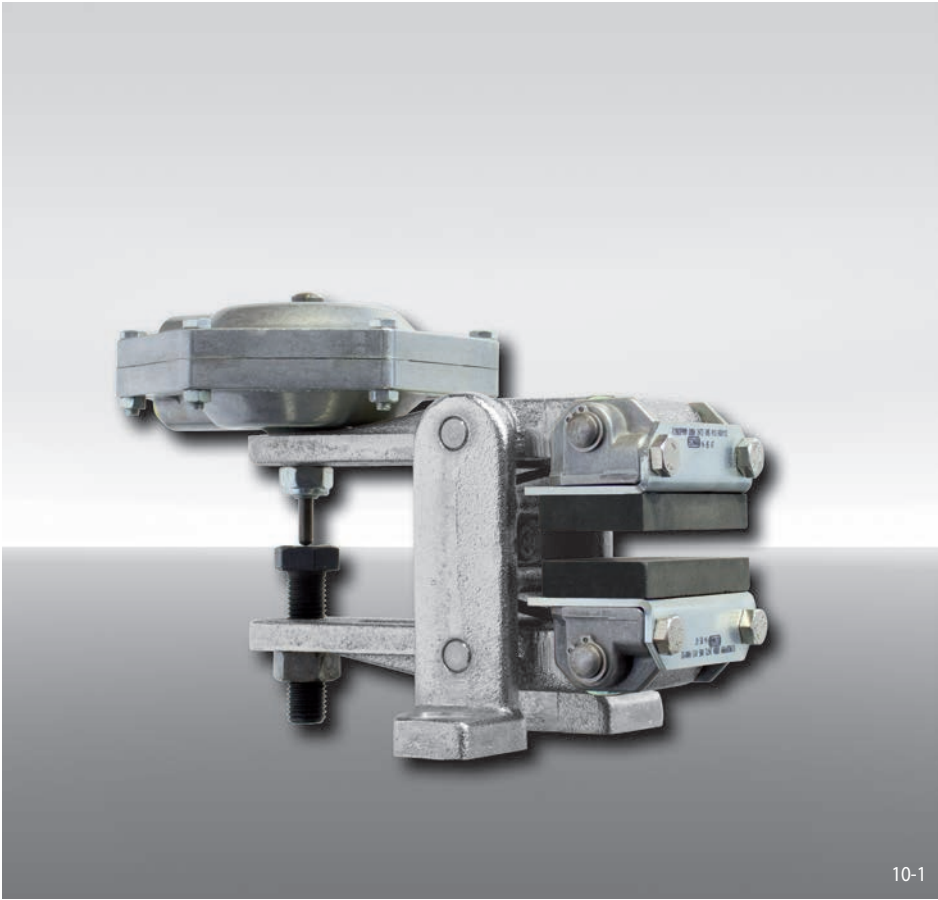


Features	Code
Brake Caliper	D
Mounting to the machine parallel to the brake disc	V
Frame size 020	020
Spring activated	F
Pneumatically released	P
Manual adjustment to accommodate friction block wear	M
Thrusters 020, 030 or 040 are available	020 030 040
Thruster mounted right or left available	R L
Thickness of brake disc 12,5 mm	12

Example for ordering

Brake Caliper DV 020 FPM, thruster 020, thruster mounted right, thickness of brake disc 12,5 mm:

DV 020 FPM - 020 R - 12

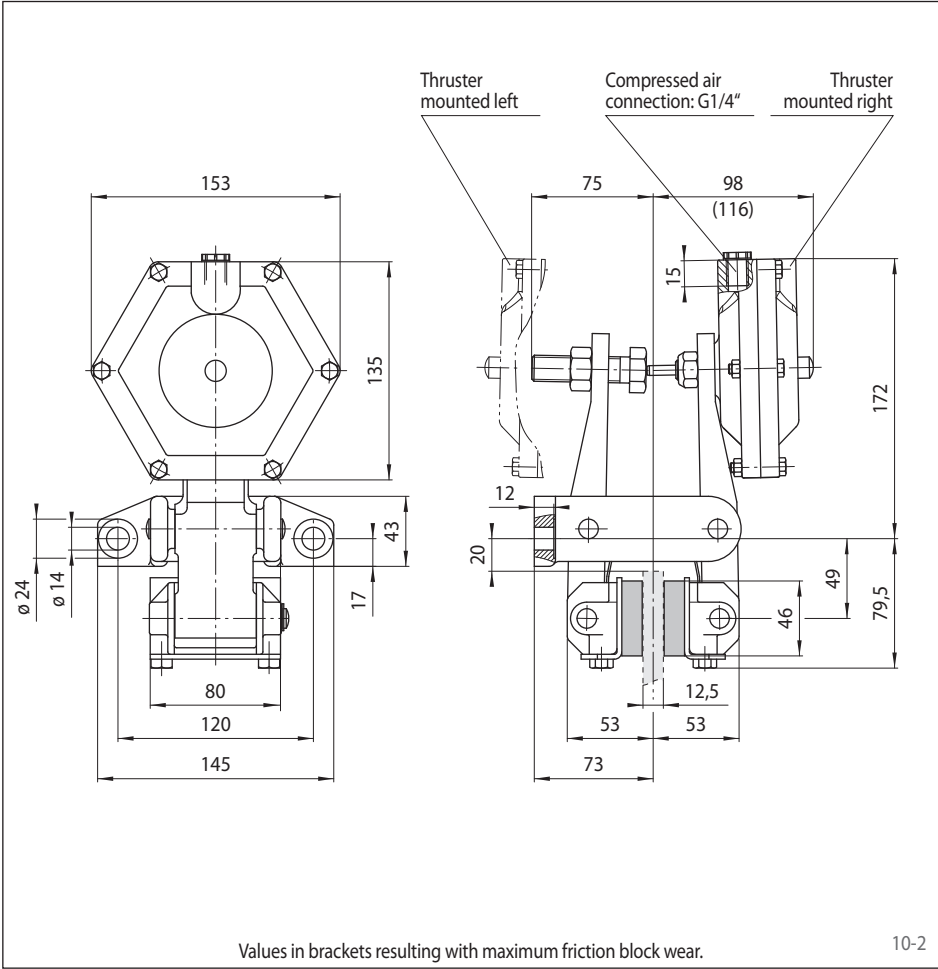


Technical Data

Brake Caliper DV 020 FPM			
	with thruster 020	with thruster 030	with thruster 040
Brake disc diameter	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm
200	97	130	200
250	130	180	270
300	170	220	340
355	200	270	420
430	250	340	520
520	310	430	650
Clamping force	1 700 N	2 300 N	3 500 N
Air pressure	min. 2,6 bar max. 7 bar	min. 3,5 bar max. 7 bar	min. 5 bar max. 7 bar
Air volume per activation	max. 17 cm ³	max. 17 cm ³	max. 17 cm ³
Weight	5,2 kg	5,2 kg	5,2 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Brake Caliper DH 020 FPM

spring activated – pneumatically released

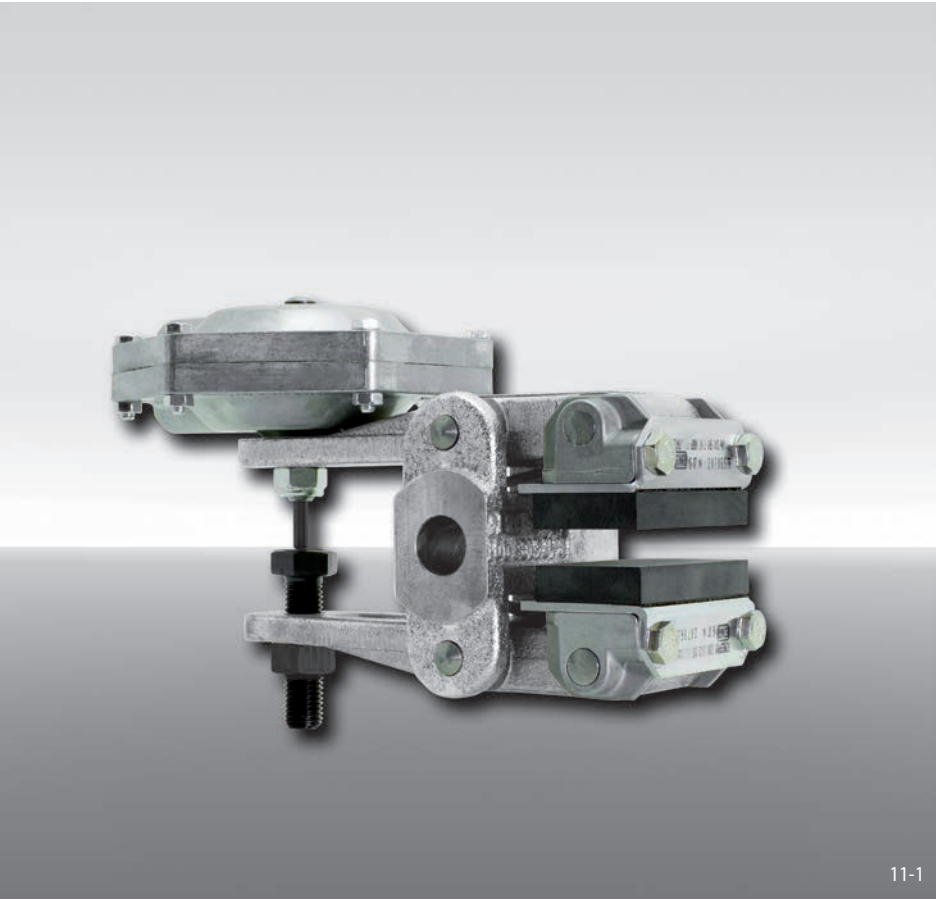

Features	Code
Brake Caliper	D
Mounting to the machine at right angles to the brake disc	H
Frame size 020	020
Spring activated	F
Pneumatically released	P
Manual adjustment to accommodate friction block wear	M
Thrusters 020, 030 or 040 are available	020 030 040
Position of the thruster to the right or left can be defined by turning the brake during installation	U
Thickness of brake disc 12,5 mm	12

Example for ordering


Brake Caliper DH 020 FPM, thruster 020, position of the thruster can be to the right or left, thickness of brake disc 12,5 mm:

DH 020 FPM - 020 U - 12

Technical Data

	Brake Caliper DH 020 FPM		
	with thruster 020	with thruster 030	with thruster 040
Brake disc diameter	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm
200	97	130	200
250	130	180	270
300	170	220	340
355	200	270	420
430	250	340	520
520	310	430	650
Clamping force	1 700 N	2 300 N	3 500 N
Air pressure	min. 2,6 bar max. 7 bar	min. 3,5 bar max. 7 bar	min. 5 bar max. 7 bar
Air volume per activation	max. 17 cm ³	max. 17 cm ³	max. 17 cm ³
Weight	5,2 kg	5,2 kg	5,2 kg


The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

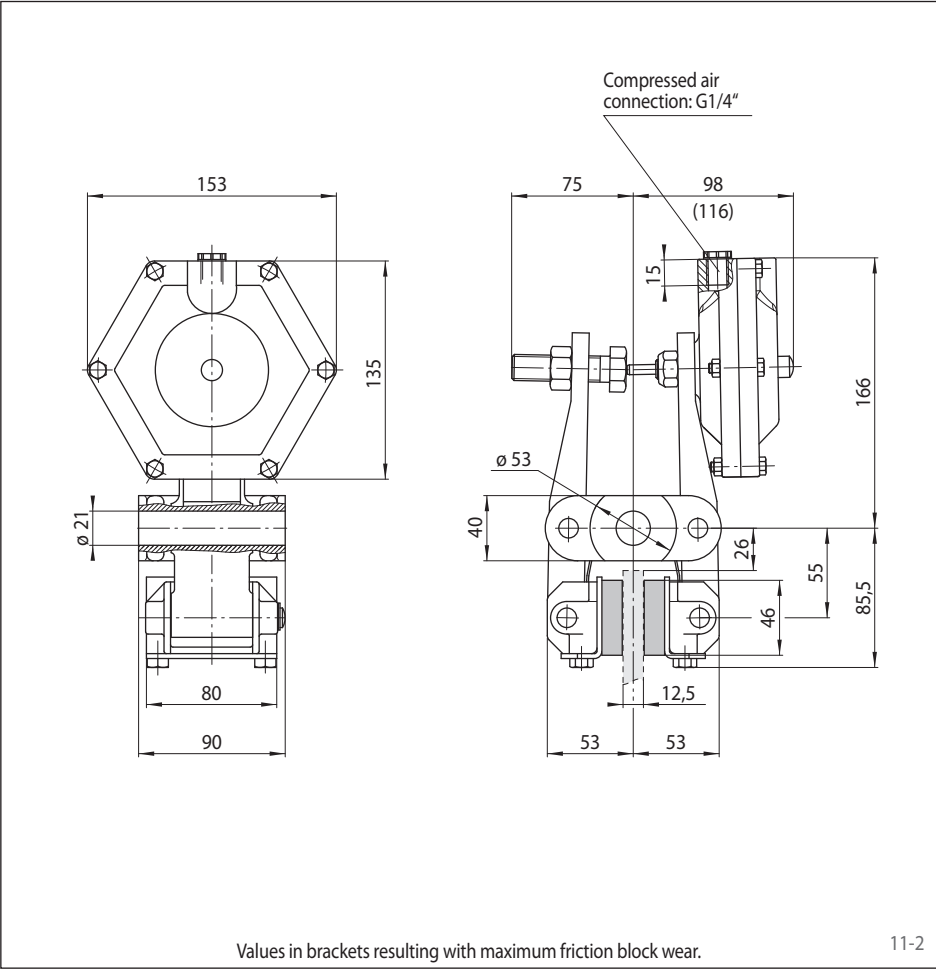

Brake Caliper DH 025 FPM

spring activated – pneumatically released

RINGSPANN®

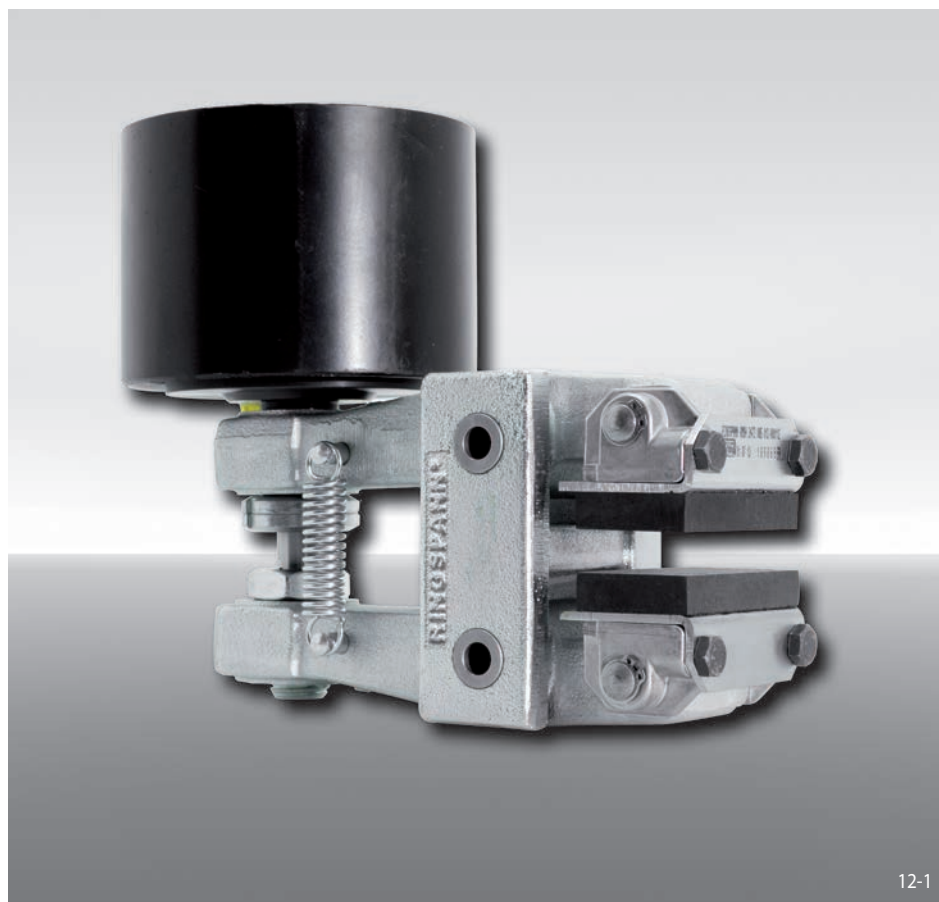

12-1

Features

Brake Caliper

Code

D

Mounting to the machine
at right angles to the brake disc

H

Frame size 025

025

Spring activated

F

Pneumatically released

P

Manual adjustment to
accommodate friction block wear

M

Thrusters 015, 025, 035 or 045
are available

015
to
045

Thruster mounted right
or left available

R
L

Thickness of brake disc 12,5 mm
or 25 mm

12
25

Example for ordering

Brake Caliper DH 025 FPM, thruster 015,
thruster mounted right, thickness of
brake disc 12,5 mm:

DH 025 FPM - 015 R - 12


Technical Data

	Brake Caliper DH 025 FPM			
	with thruster 015	with thruster 025	with thruster 035	with thruster 045
Brake disc diameter	Braking torque	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm	Nm
200	240	270	400	570
250	330	370	540	770
300	420	460	680	970
355	510	570	840	1200
430	640	710	1050	1500
520	790	890	1300	1900
Clamping force	4300 N	4800 N	7100 N	10100 N
Air pressure	min. 5 bar max. 7 bar	min. 5 bar max. 8 bar	min. 4,2 bar max. 8 bar	min. 5 bar max. 8 bar
Air volume per activation	max. 17 cm ³	max. 120 cm ³	max. 185 cm ³	max. 185 cm ³
Weight	7,5 kg	8,6 kg	10,9 kg	11,0 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Brake Caliper DH 025 FPM


spring activated – pneumatically released

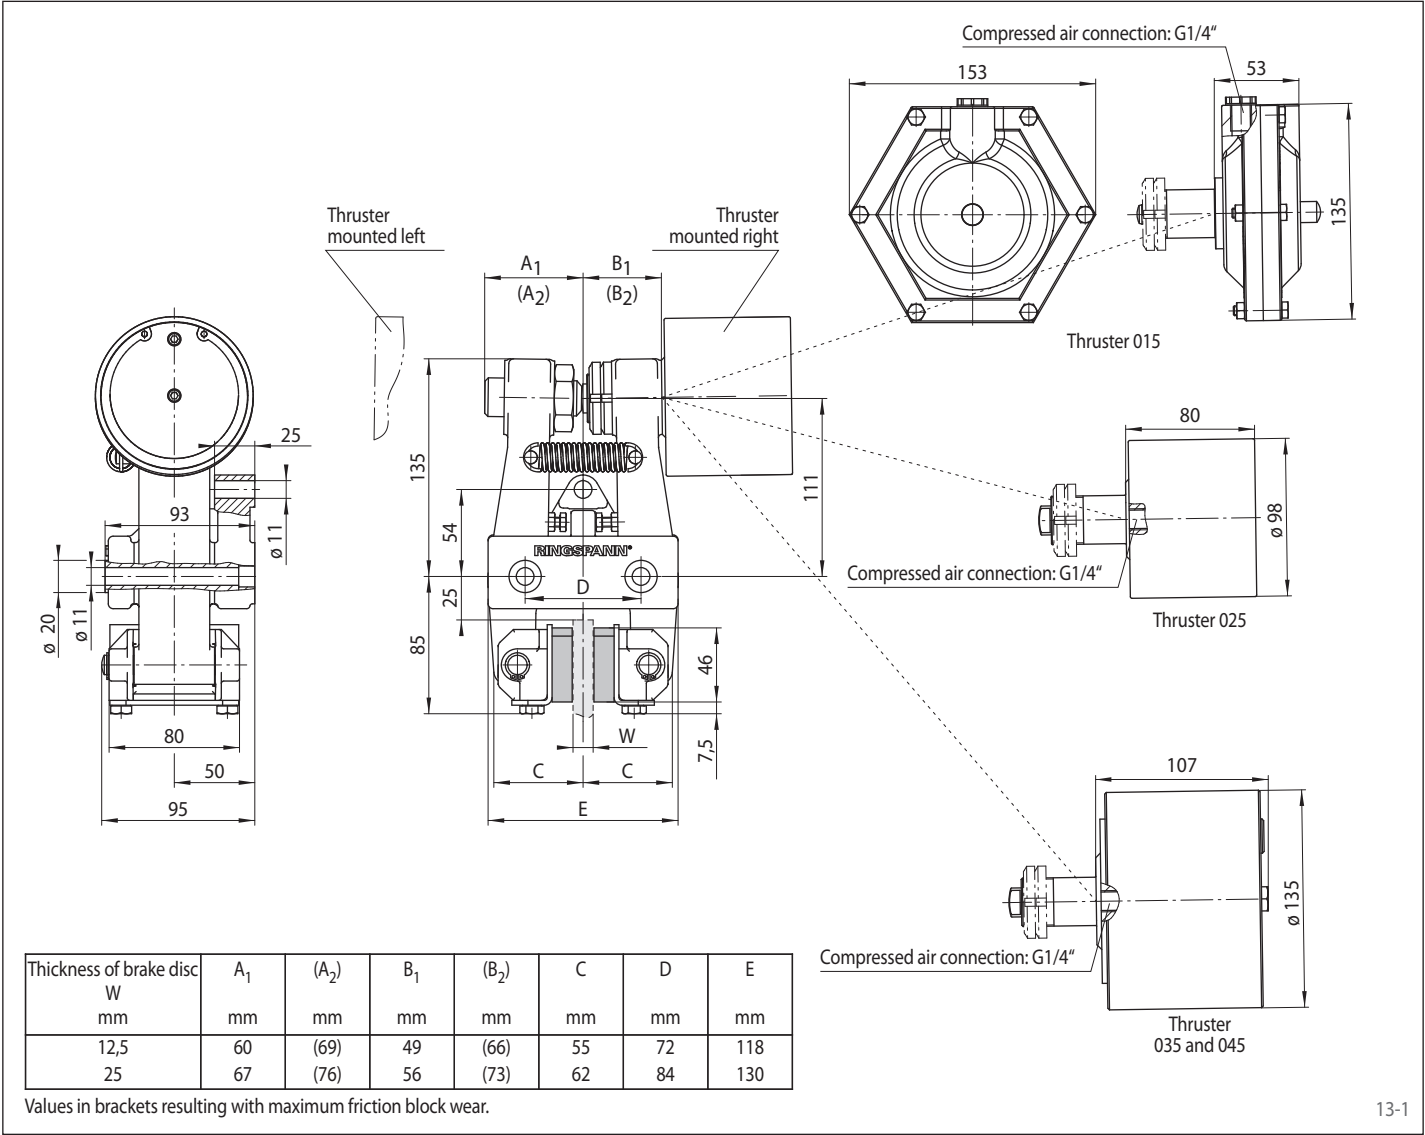

Brake Caliper DH 025 FPA

spring activated – pneumatically released

RINGSPANN®

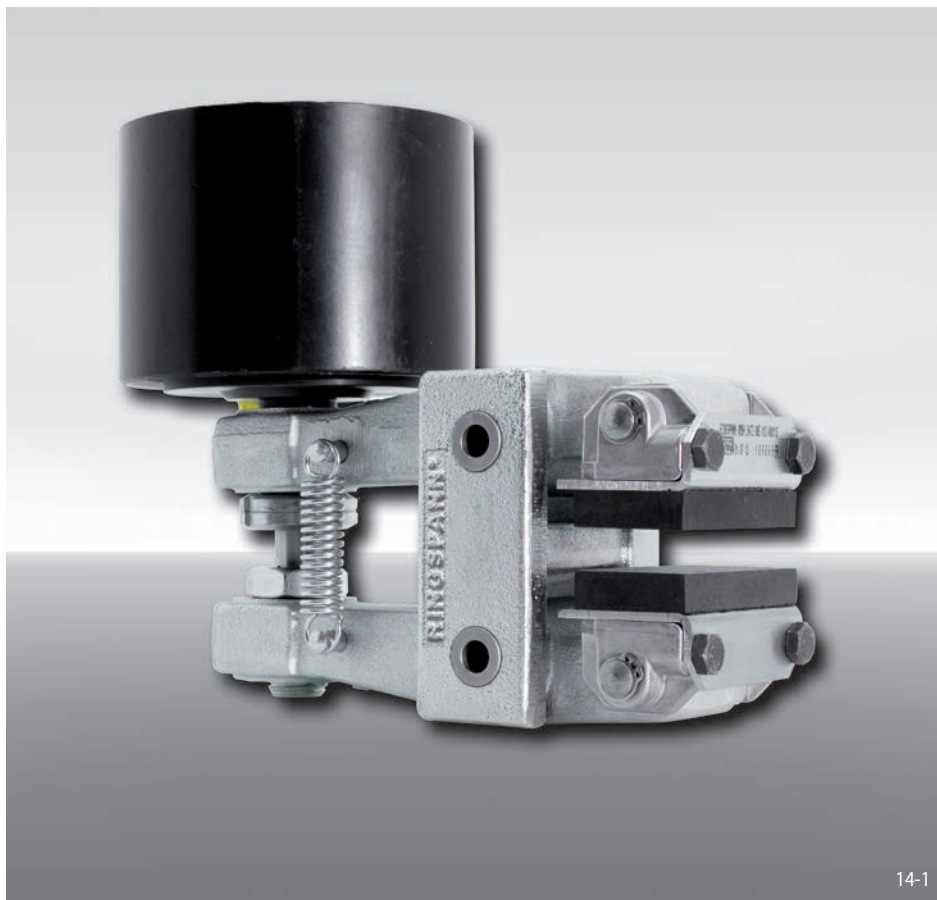

14-1

Features

Features	Code
Brake Caliper	D
Mounting to the machine at right angles to the brake disc	H
Frame size 025	025
Spring activated	F
Pneumatically released	P
Automatic adjustment to accommodate friction block wear	A
Thrusters 065, 085 or 095 are available	065 to 095
Thruster mounted right or left available	R L
Thickness of brake disc 12,5 mm or 25 mm	12 25

Example for ordering

Brake Caliper DH 025 FPA, thruster 085, thruster mounted right, thickness of brake disc 12,5 mm:

DH 025 FPA - 085 R - 12

Technical Data

	Brake Caliper DH 025 FPA		
	with thruster 065	with thruster 085	with thruster 095
Brake disc diameter	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm
200	250	150	530
250	340	200	710
300	430	250	900
355	530	310	1 100
430	670	390	1 400
520	830	480	1 700
Clamping force	4 500 N	2 600 N	9 300 N
Air pressure	min. 5 bar max. 8 bar	min. 1,7 bar max. 8 bar	min. 5 bar max. 8 bar
Air volume per activation	max. 72 cm ³	max. 140 cm ³	max. 140 cm ³
Weight	8,9 kg	11,2 kg	11,2 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

RINGSPANN®

[illegible]

Thickness of brake disc W mm	A ₁ mm	(A ₂) mm	B ₁ mm	(B ₂) mm	C mm	D mm	E mm
12,5	51	(69)	49	(66)	55	72	118
25	57	(76)	56	(73)	62	84	130


Values in brackets resulting with maximum friction block wear.

15-1

Brake Caliper DV 030 FPM

spring activated – pneumatically released

RINGSPANN®

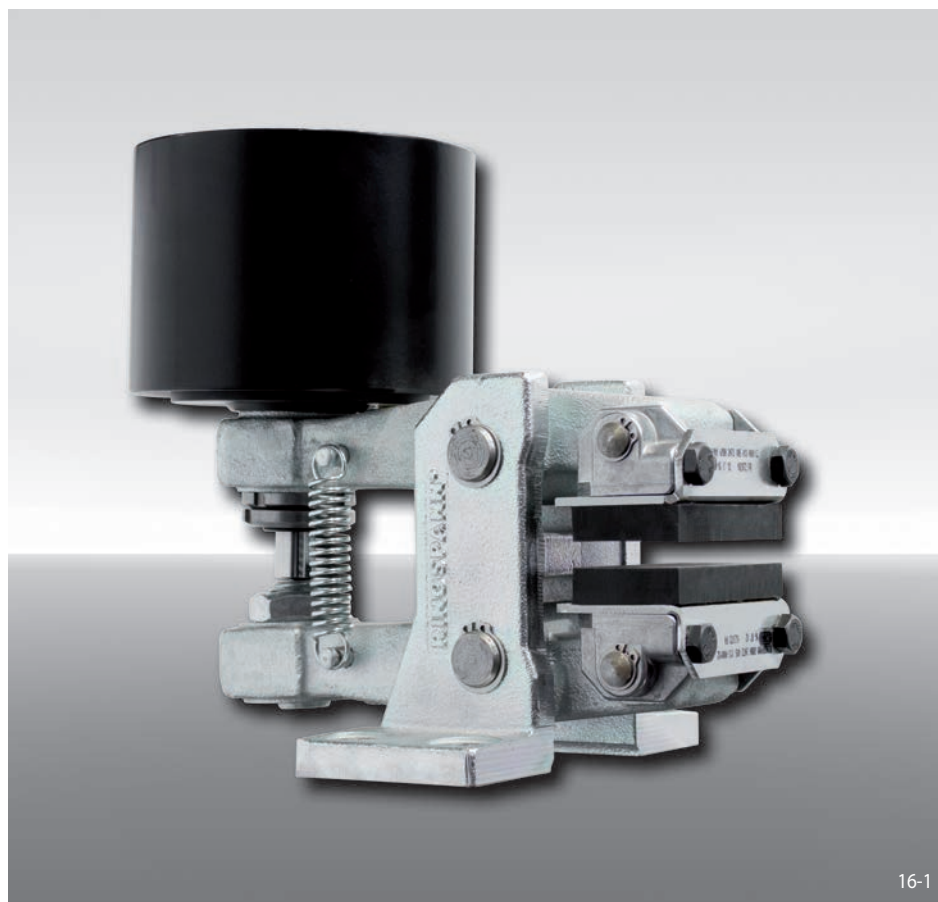

16-1

Features

Features	Code
Brake Caliper	D
Mounting to the machine parallel to the brake disc	V
Frame size 030	030
Spring activated	F
Pneumatically released	P
Manual adjustment to accommodate friction block wear	M
Thrusters 025, 035, 045 or 101 are available	025 to 101
Thruster mounted right or left available	R L
Thickness of brake disc 12,5 mm or 25 mm	12 25

Example for ordering

Brake Caliper DV 030 FPM, thruster 035, thruster mounted right, thickness of brake disc 12,5 mm:

DV 030 FPM - 035 R - 12


Technical Data

	Brake Caliper DV 030 FPM			
	with thruster 025	with thruster 035	with thruster 045	with thruster 101
Brake disc diameter	Braking torque	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm	Nm
200	270	400	570	760
250	370	540	770	1050
300	460	680	970	1300
355	570	840	1200	1600
430	710	1050	1500	2000
520	890	1300	1900	2500
Arrangement	right / left	right / left	right / left	right
Clamping force	4800 N	7100 N	10100 N	13500 N
Air pressure	min. 5 bar max. 8 bar	min. 4,2 bar max. 8 bar	min. 5 bar max. 8 bar	min. 4,5 bar max. 8 bar
Air volume per activation	max. 120 cm ³	max. 185 cm ³	max. 185 cm ³	max. 540 cm ³
Weight	9,1 kg	11,2 kg	11,2 kg	12,4 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.


Brake Caliper DV 030 FPM

spring activated – pneumatically released

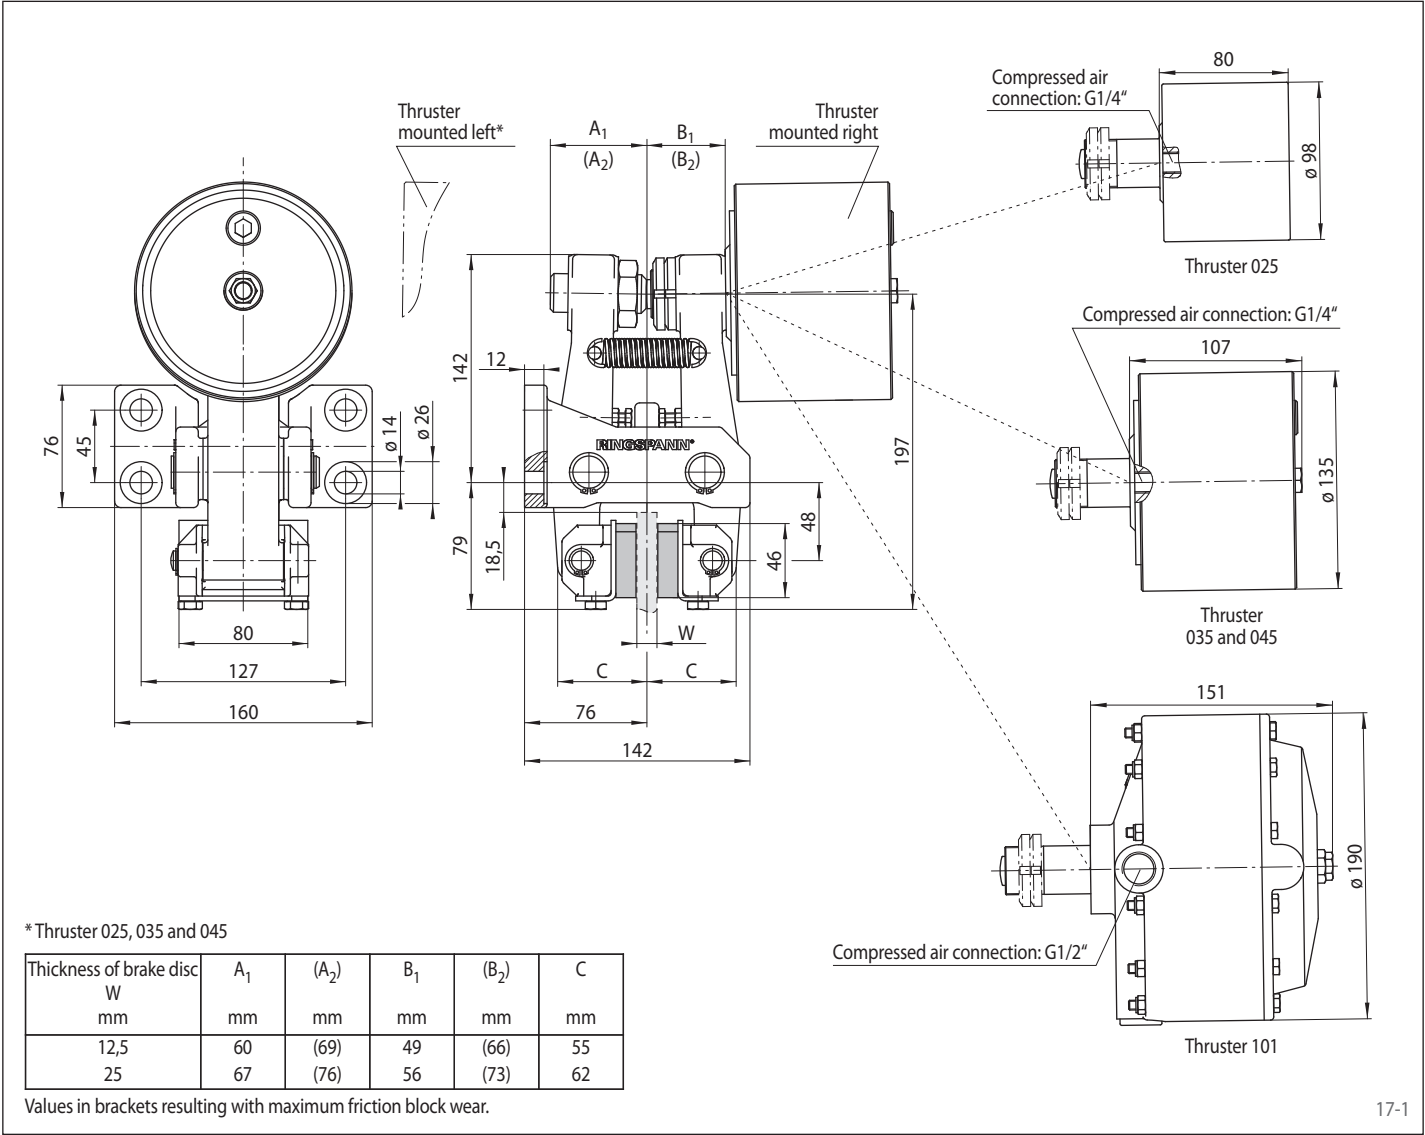

Brake Caliper DH 030 FPM

spring activated – pneumatically released

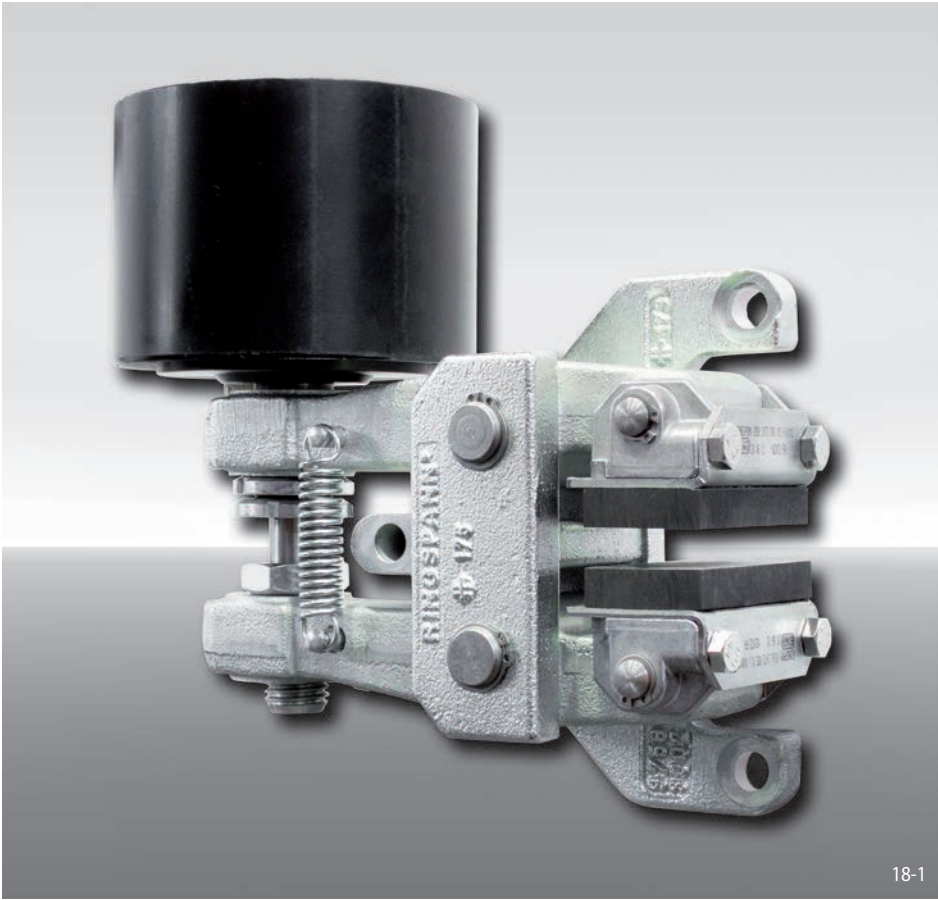

Features	Code
Brake Caliper	D
Mounting to the machine at right angles to the brake disc	H
Frame size 030	030
Spring activated	F
Pneumatically released	P
Manual adjustment to accommodate friction block wear	M
Thrusters 025, 035, 045 or 101 are available	025 to 101
Thruster mounted right or left available	R L
Thickness of brake disc 12,5 mm or 25 mm	12 25

Example for ordering

Brake Caliper DH 030 FPM, thruster 035, thruster mounted right, thickness of brake disc 12,5 mm:

DH 030 FPM - 035 R - 12


Technical Data

	Brake Caliper DH 030 FPM			
	with thruster 025	with thruster 035	with thruster 045	with thruster 101
Brake disc diameter	Braking torque	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm	Nm
200	270	400	570	760
250	370	540	770	1050
300	460	680	970	1300
355	570	840	1200	1600
430	710	1050	1500	2000
520	890	1300	1900	2500
Clamping force	4800 N	7100 N	10100 N	13500 N
Air pressure	min. 5 bar max. 8 bar	min. 4,2 bar max. 8 bar	min. 5 bar max. 8 bar	min. 4,5 bar max. 8 bar
Air volume per activation	max. 120 cm ³	max. 185 cm ³	max. 185 cm ³	max. 540 cm ³
Weight	9,5 kg	11,6 kg	11,6 kg	12,8 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4

Brake Caliper DH 030 FPM


spring activated – pneumatically released

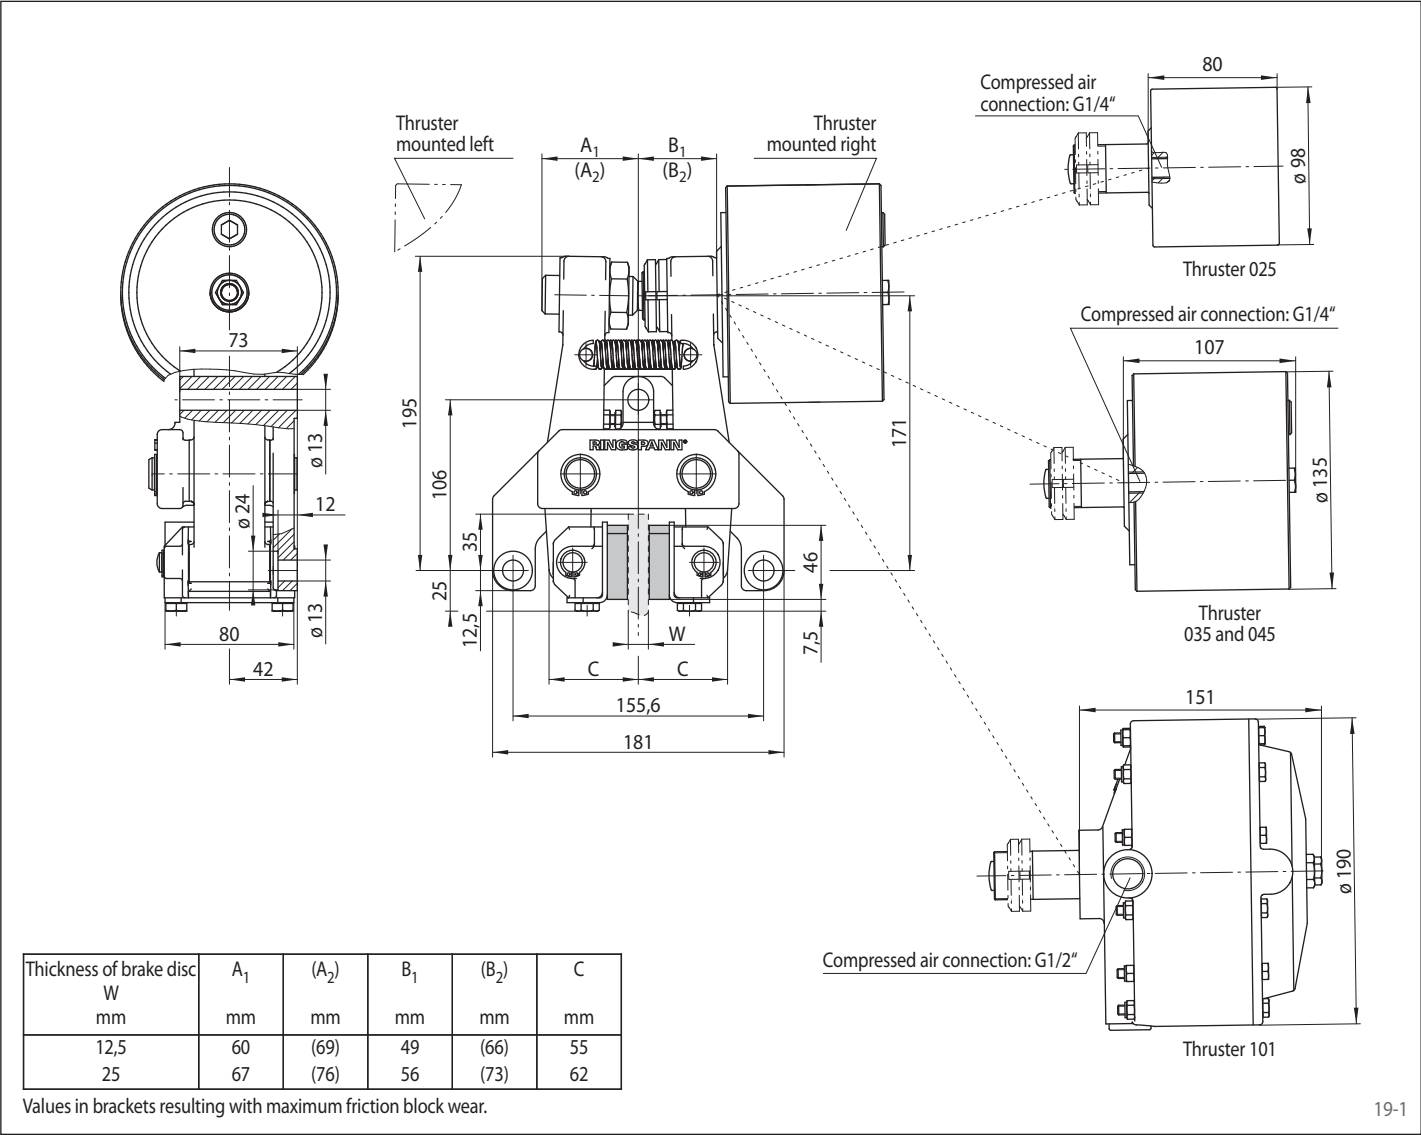

Brake Caliper DV 030 FPA

spring activated – pneumatically released

RINGSPANN®

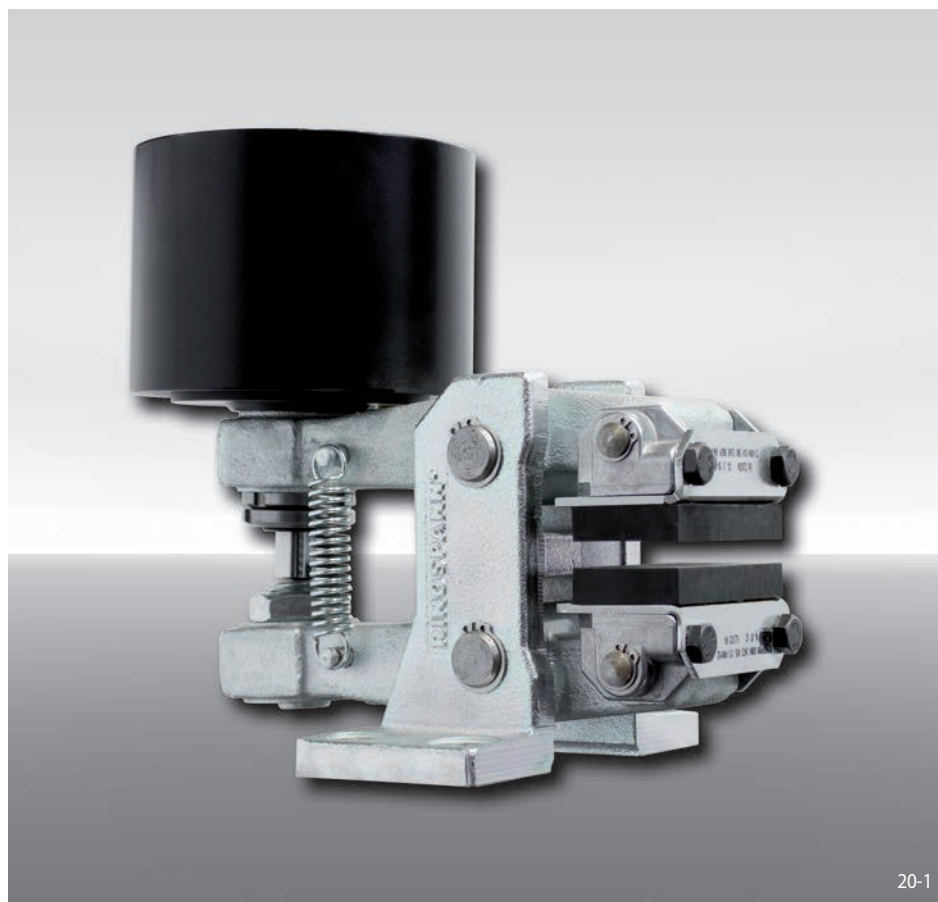

20-1

Features

Brake Caliper

Code

D

Mounting to the machine
parallel to the brake disc

V

Frame size 030

030

Spring activated

F

Pneumatically released

P

Automatic adjustment to
accommodate friction block wear

A

Thrusters 065, 085, 095 or 105
are available

065
to
105

Thruster mounted right
or left available

R
L

Thickness of brake disc 12,5 mm
or 25 mm

12
25

Example for ordering

Brake Caliper DV 030 FPA, thruster 085,
thruster mounted right, thickness of
brake disc 12,5 mm:

DV 030 FPA - 085 R - 12


Technical Data

	Brake Caliper DV 030 FPA			
	with thruster 065	with thruster 085	with thruster 095	with thruster 105
Brake disc diameter	Braking torque	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm	Nm
200	250	150	530	760
250	340	200	710	1050
300	430	250	900	1300
355	530	310	1100	1600
430	670	390	1400	2000
520	830	480	1700	2500
Arrangement	right / left	right / left	right / left	right
Clamping force	4500 N	2600 N	9300 N	13500 N
Air pressure	min. 5 bar max. 8 bar	min. 1,7 bar max. 8 bar	min. 5 bar max. 8 bar	min. 4,7 bar max. 8 bar
Air volume per activation	max. 72 cm ³	max. 140 cm ³	max. 140 cm ³	max. 460 cm ³
Weight	9,1 kg	11,5 kg	11,5 kg	13,1 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Brake Caliper DV 030 FPA


spring activated – pneumatically released

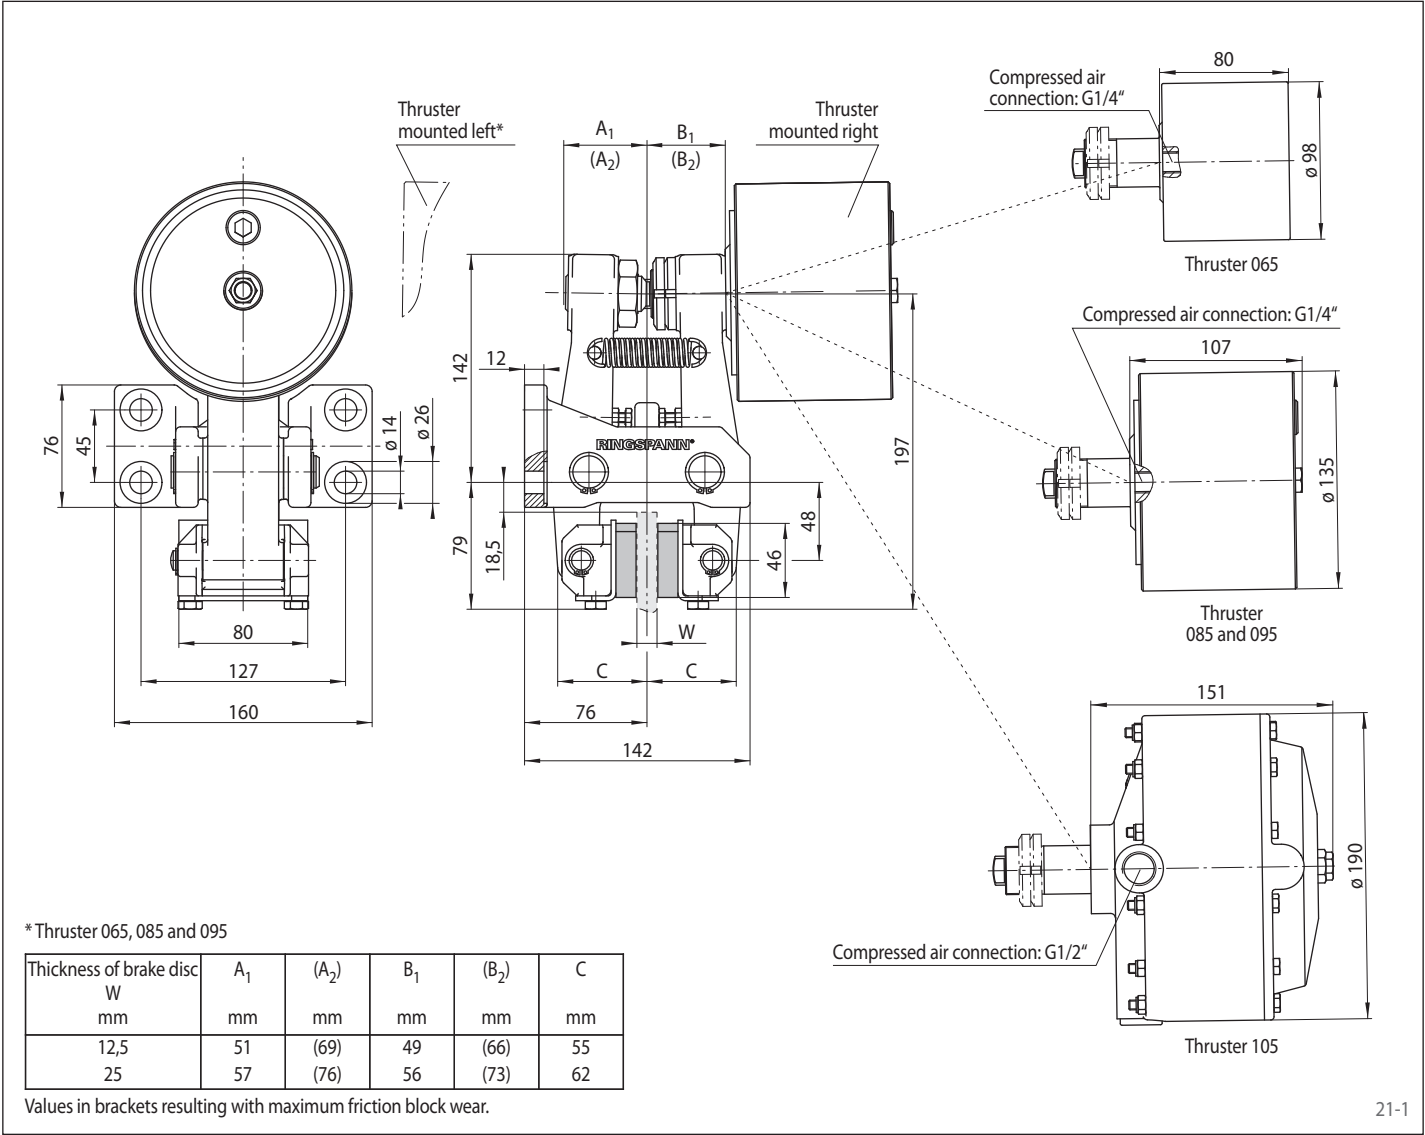

Brake Caliper DH 030 FPA

spring activated – pneumatically released

RINGSPANN®

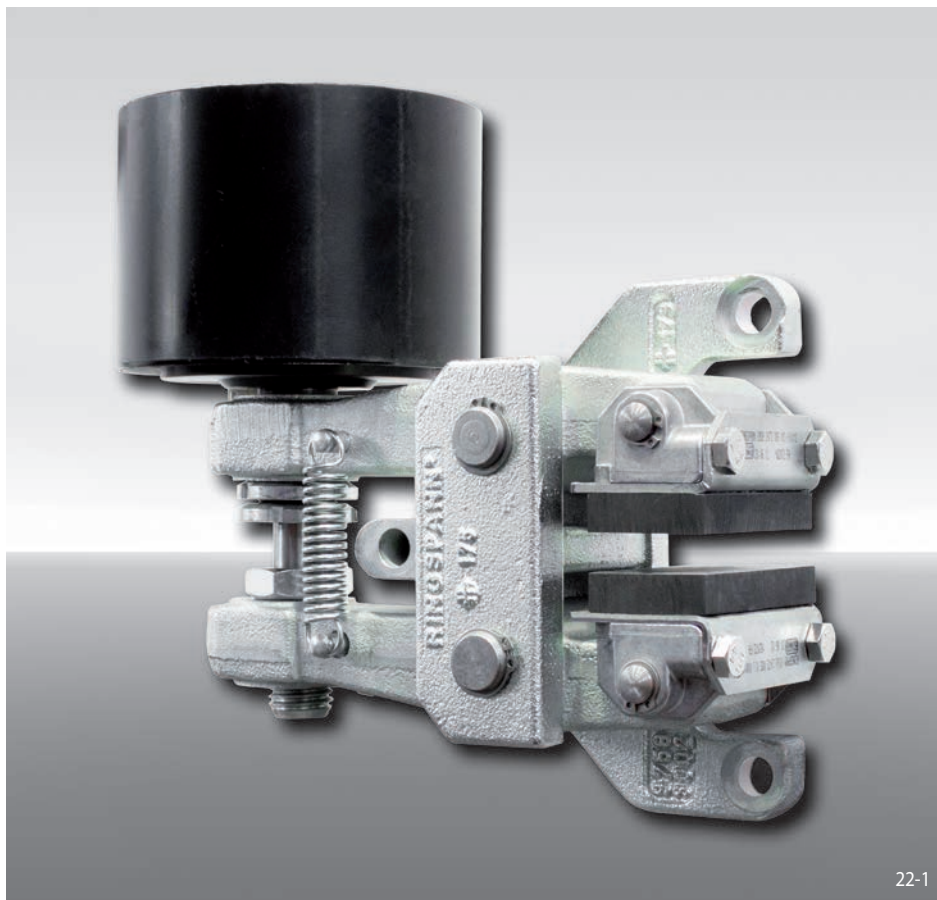

22-1

Features

Features	Code
Brake Caliper	D
Mounting to the machine at right angles to the brake disc	H
Frame size 030	030
Spring activated	F
Pneumatically released	P
Automatic adjustment to accommodate friction block wear	A
Thrusters 065, 085, 095 or 105 are available	065 to 105
Thruster mounted right or left available	R L
Thickness of brake disc 12,5 mm or 25 mm	12 25

Example for ordering

Brake Caliper DH 030 FPA, thruster 085, thruster mounted right, thickness of brake disc 12,5 mm:

DH 030 FPA - 085 R - 12


Technical Data

	Brake Caliper DH 030 FPA			
	with thruster 065	with thruster 085	with thruster 095	with thruster 105
Brake disc diameter	Braking torque	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm	Nm
200	250	150	530	760
250	340	200	710	1050
300	430	250	900	1300
355	530	310	1100	1600
430	670	390	1400	2000
520	830	480	1700	2500
Clamping force	4500 N	2600 N	9300 N	13500 N
Air pressure	min. 5 bar max. 8 bar	min. 1,7 bar max. 8 bar	min. 5 bar max. 8 bar	min. 4,7 bar max. 8 bar
Air volume per activation	max. 72 cm ³	max. 140 cm ³	max. 140 cm ³	max. 460 cm ³
Weight	9,5 kg	11,9 kg	11,9 kg	13,5 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Brake Caliper DH 030 FPA


spring activated – pneumatically released

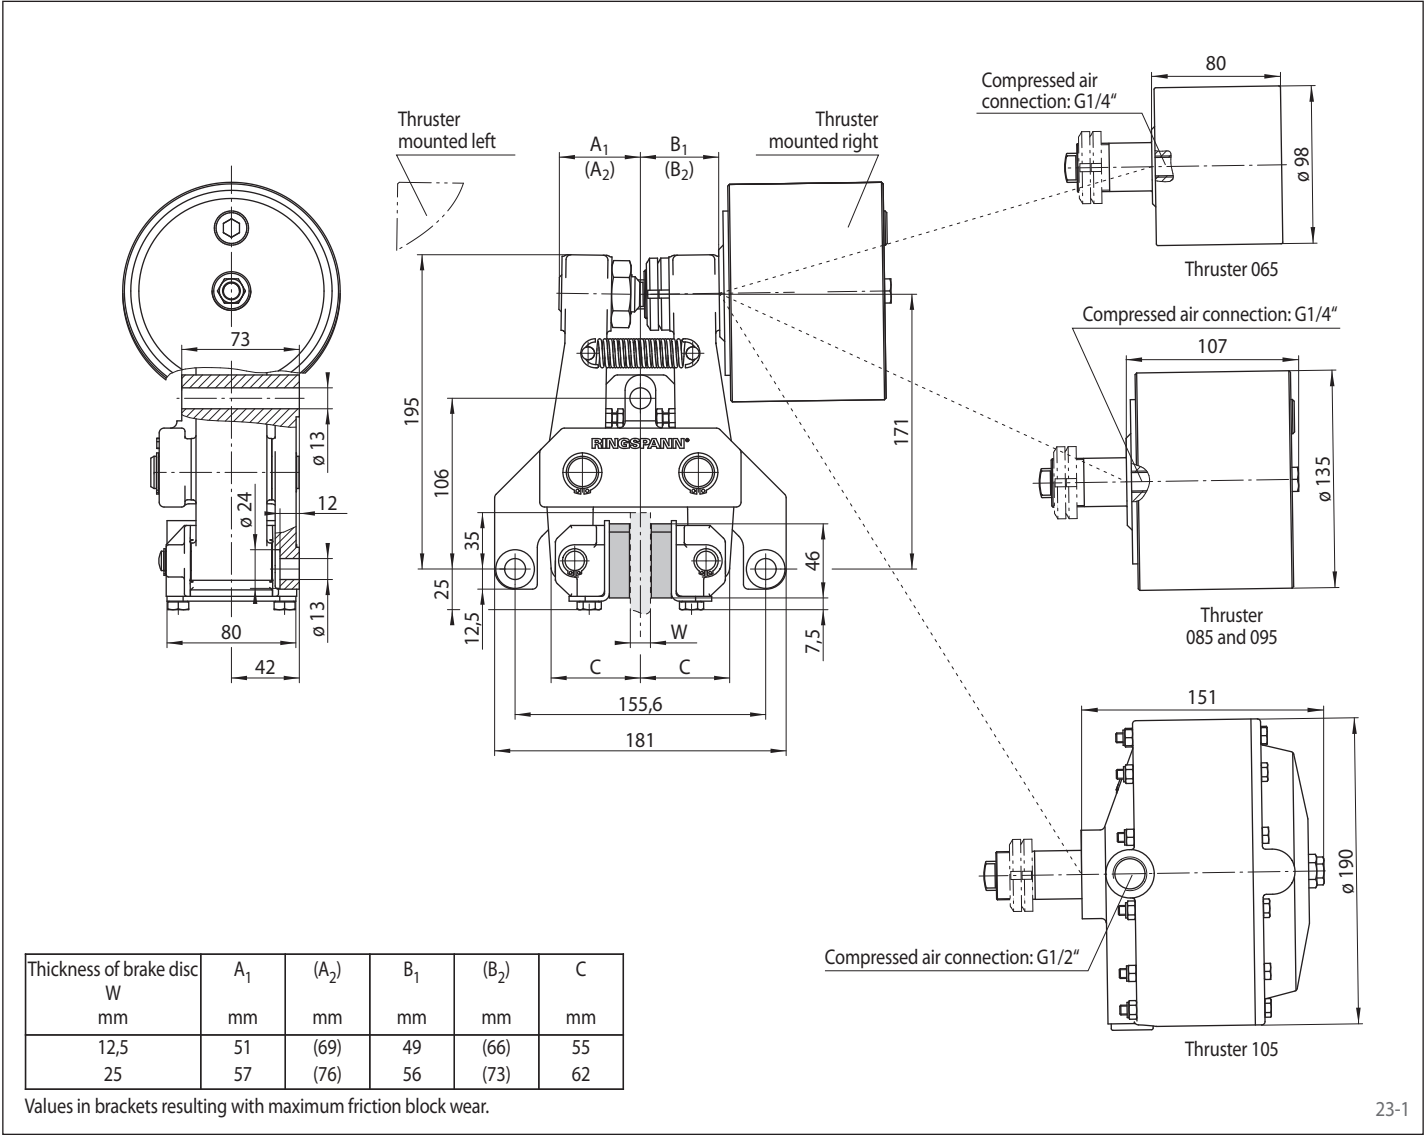

Brake Caliper DV 035 FPM

RINGSPANN®

spring activated – pneumatically released

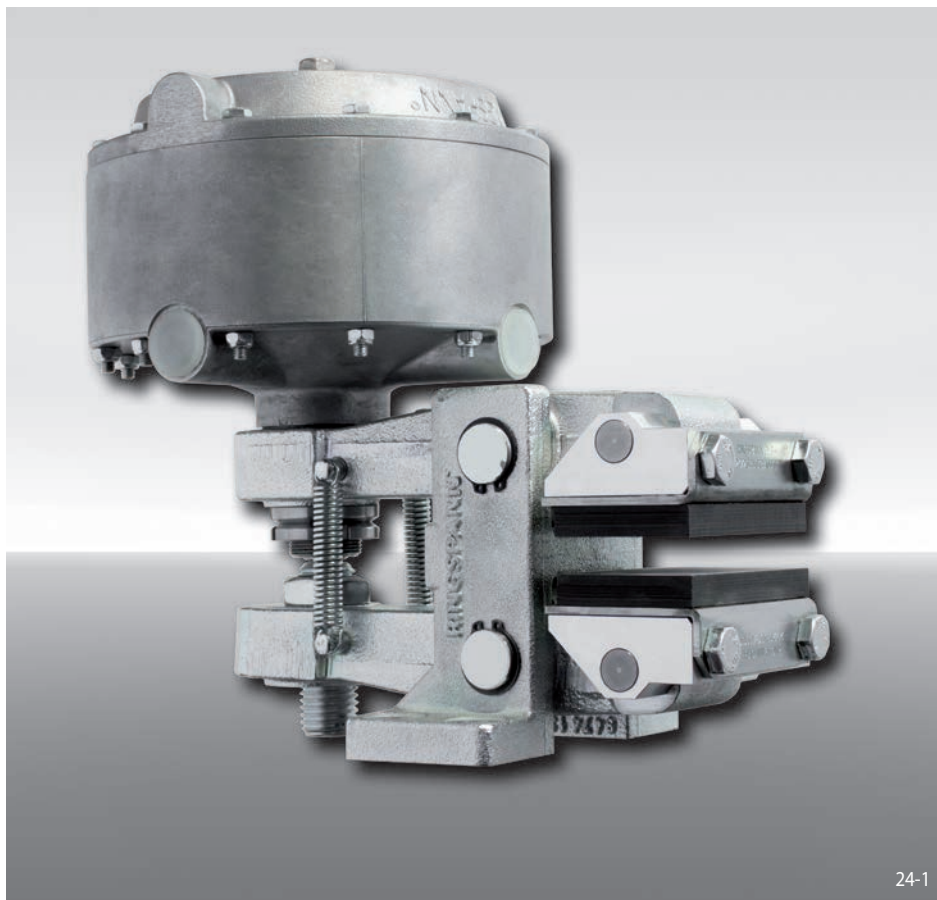

24-1

Features

Features	Code
Brake Caliper	D
Mounting to the machine parallel to the brake disc	V
Frame size 035	035
Spring activated	F
Pneumatically released	P
Manual adjustment to accommodate friction block wear	M
Thrusters 025, 035, 045, 102, 111 or 122 are available	025 to 122
Thruster mounted right available	R
Thickness of brake disc 12,5 mm, 25 mm, 30 mm or 40 mm	12 to 40

Example for ordering

Brake Caliper DV 035 FPM, thruster 111, thruster mounted right, thickness of brake disc 12,5 mm:

Technical Data


DV 035 FPM - 111 R - 12

	Brake Caliper DV 035 FPM					
	with thruster 025	with thruster 035	with thruster 045	with thruster 102	with thruster 111	with thruster 122
Brake disc diameter	Braking torque	Braking torque	Braking torque	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm	Nm	Nm	Nm
300	430	640	900	820	1 450	1 850
355	530	790	1 100	1 000	1 750	2 250
430	670	990	1 400	1 300	2 250	2 850
520	840	1 250	1 750	1 600	2 800	3 550
630	1 050	1 550	2 150	2 000	3 450	4 400
710	1 200	1 750	2 450	2 250	3 950	5 000
800	1 350	2 000	2 800	2 600	4 500	5 750
Clamping force	4 600 N	6 800 N	9 600 N	8 800 N	15 300 N	19 500 N
Air pressure	min. 5 bar max. 8 bar	min. 4,2 bar max. 8 bar	min. 5 bar max. 8 bar	min. 3 bar max. 8 bar	min. 5 bar max. 8 bar	min. 6,5 bar max. 8 bar
Air volume per activation	max. 120 cm ³	max. 185 cm ³	max. 185 cm ³	max. 540 cm ³	max. 540 cm ³	max. 540 cm ³
Weight	10,6 kg	13,0 kg	13,0 kg	14,2 kg	14,2 kg	14,2 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Brake Caliper DV 035 FPM


spring activated – pneumatically released

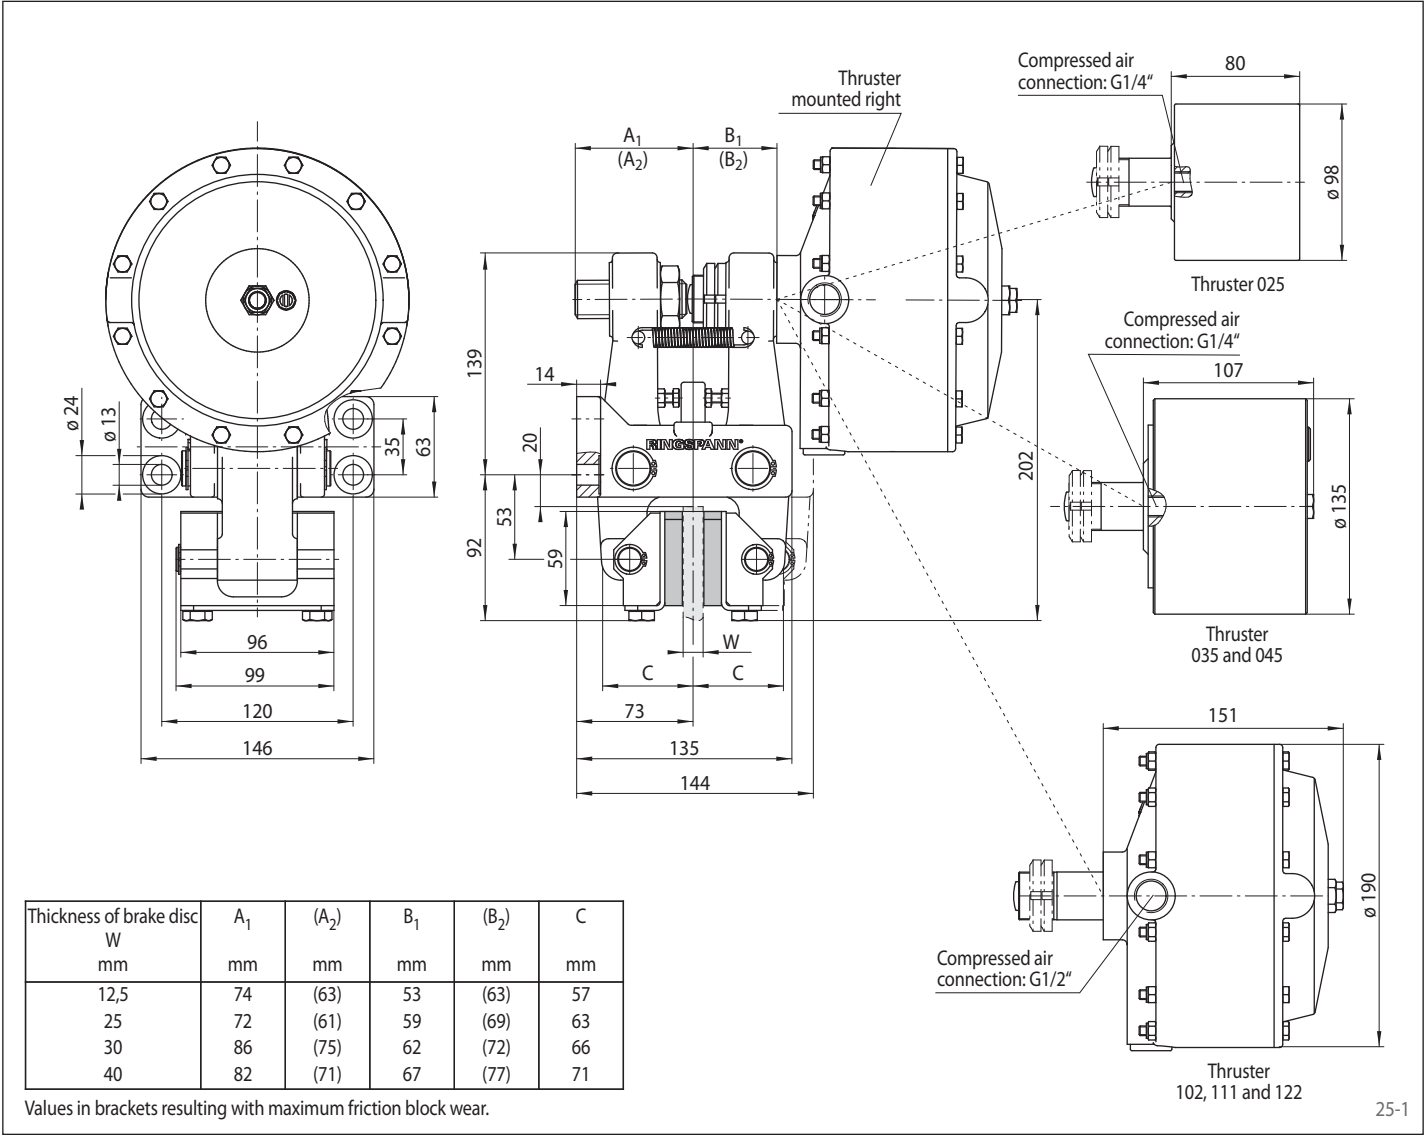

Brake Caliper DH 035 FPM

RINGSPANN®

spring activated – pneumatically released

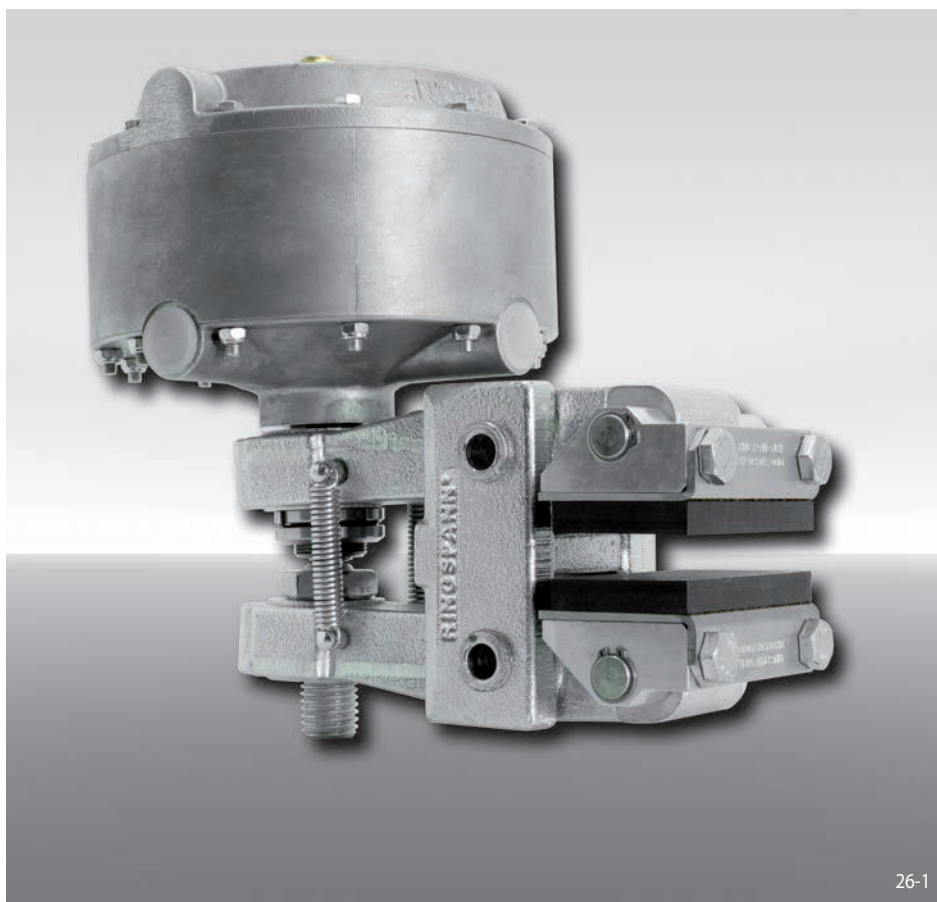

26-1

Features

Brake Caliper

Code

D

Mounting to the machine
at right angles to the brake disc

H

Frame size 035

035

Spring activated

F

Pneumatically released

P

Manual adjustment to
accommodate friction block wear

M

Thrusters 025, 035, 045, 102, 111
or 122 are available

025
to
122

Thruster mounted right
or left available

R
L

Thickness of brake disc 12,5 mm,
25 mm, 30 mm or 40 mm

12
to
40

Example for ordering

Brake Caliper DH 035 FPM, thruster 111,
thruster mounted right, thickness of
brake disc 12,5 mm:

Technical Data


DH 035 FPM - 111 R - 12

	Brake Caliper DH 035 FPM					
	with thruster 025	with thruster 035	with thruster 045	with thruster 102	with thruster 111	with thruster 122
Brake disc diameter	Braking torque	Braking torque	Braking torque	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm	Nm	Nm	Nm
300	430	640	900	820	1 450	1 850
355	530	790	1 100	1 000	1 750	2 250
430	670	990	1 400	1 300	2 250	2 850
520	840	1 250	1 750	1 600	2 800	3 550
630	1 050	1 550	2 150	2 000	3 450	4 400
710	1 200	1 750	2 450	2 250	3 950	5 000
800	1 350	2 000	2 800	2 600	4 500	5 750
Clamping force	4 600 N	6 800 N	9 600 N	8 800 N	15 300 N	19 500 N
Air pressure	min. 5 bar max. 8 bar	min. 4,2 bar max. 8 bar	min. 5 bar max. 8 bar	min. 3 bar max. 8 bar	min. 5 bar max. 8 bar	min. 6,5 bar max. 8 bar
Air volume per activation	max. 120 cm ³	max. 185 cm ³	max. 185 cm ³	max. 540 cm ³	max. 540 cm ³	max. 540 cm ³
Weight	10,6 kg	13,0 kg	13,0 kg	14,2 kg	14,2 kg	14,2 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Brake Caliper DH 035 FPM


spring activated – pneumatically released

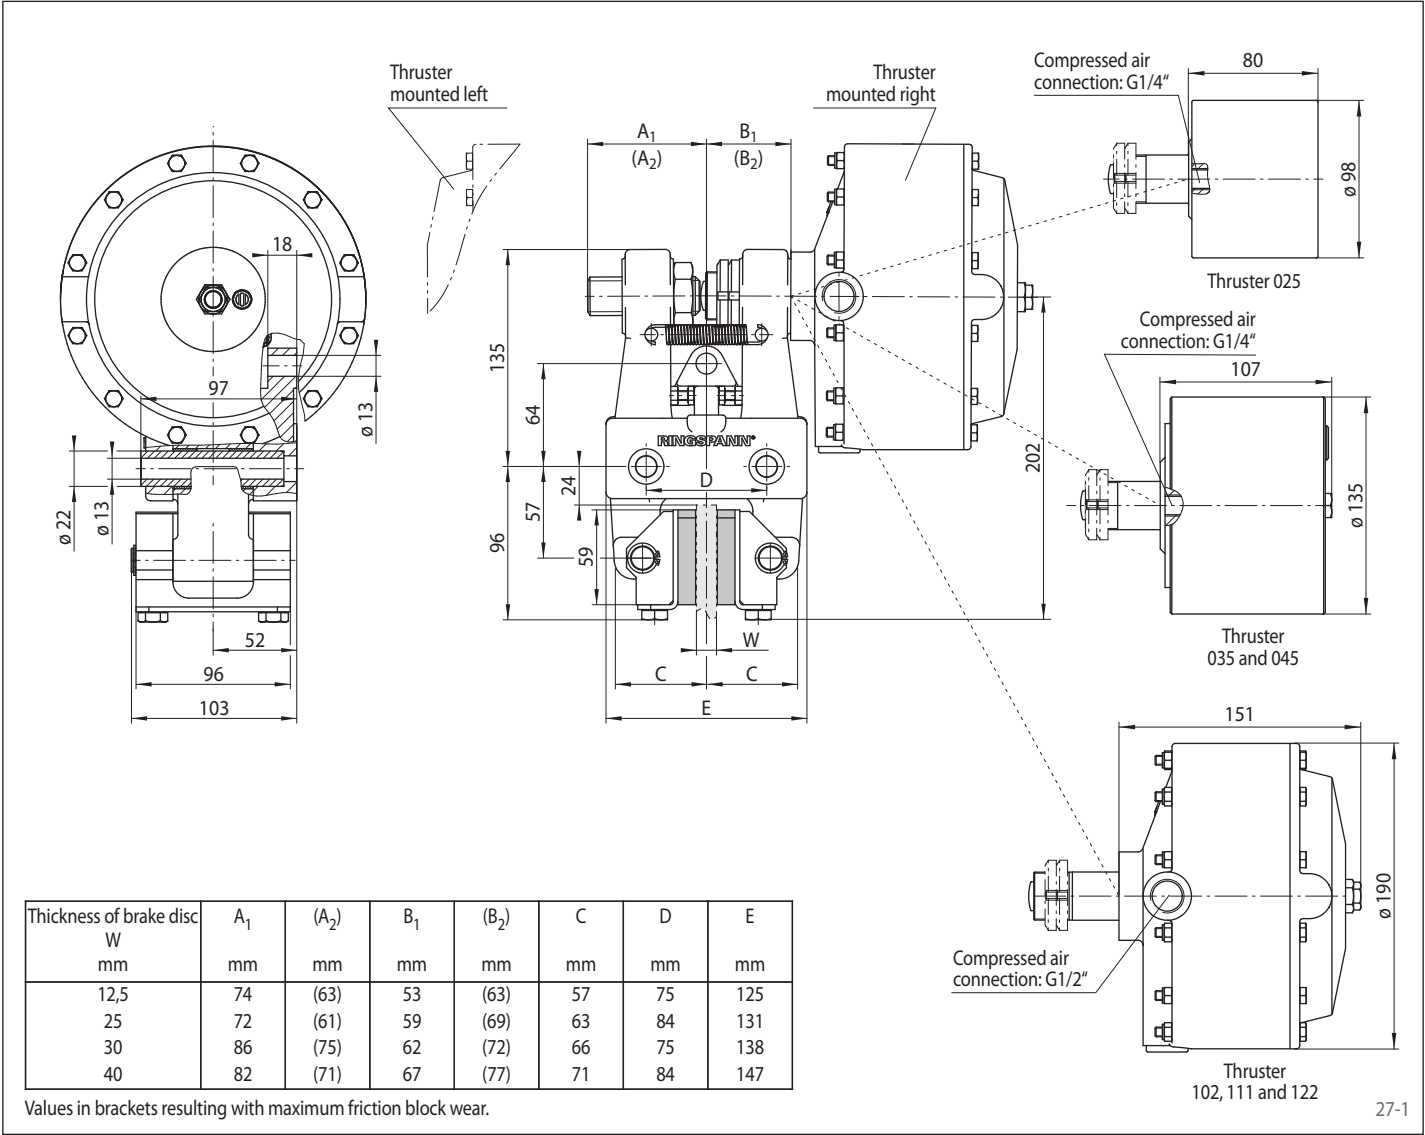

Brake Caliper DV 035 FPA

spring activated – pneumatically released

RINGSPANN®

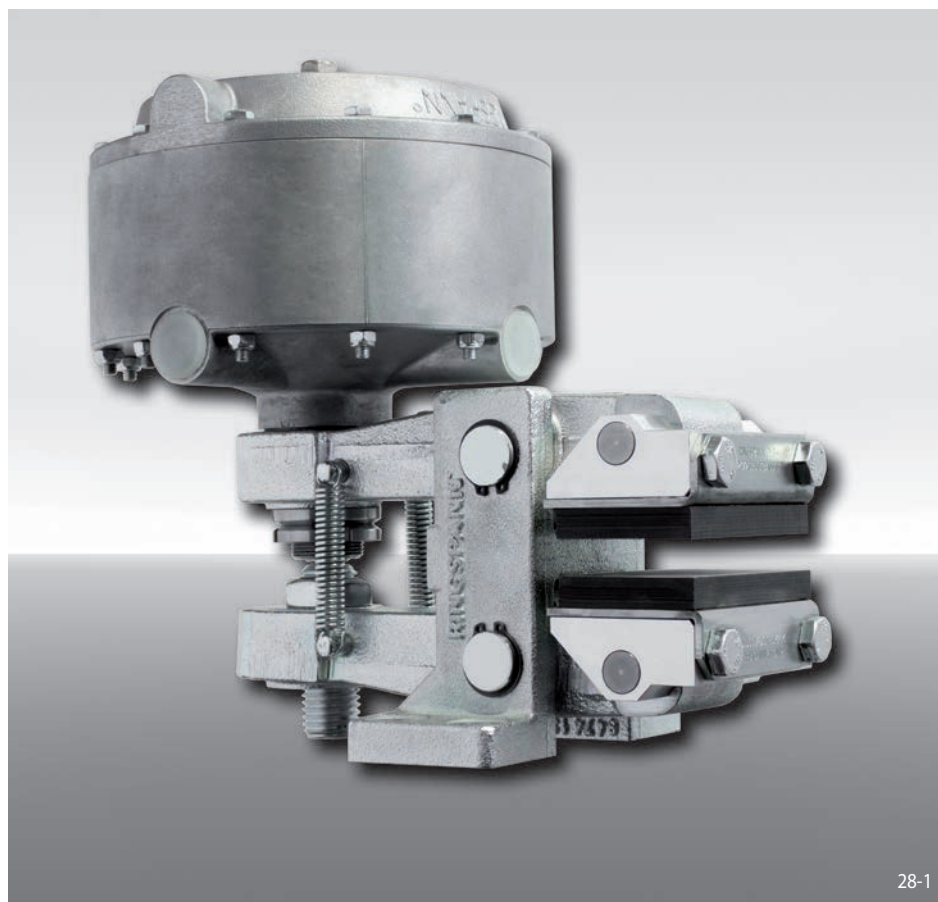

28-1

Features

Features	Code
Brake Caliper	D
Mounting to the machine parallel to the brake disc	V
Frame size 035	035
Spring activated	F
Pneumatically released	P
Automatic adjustment to accommodate friction block wear	A
Thrusters 065, 085, 095, 115 or 125 are available	065 to 125
Thruster mounted right available	R
Thickness of brake disc 12,5 mm, 25 mm, 30 mm or 40 mm	12 to 40

Example for ordering

Brake Caliper DV 035 FPA, thruster 095, thruster mounted right, thickness of brake disc 12,5 mm:


DV 035 FPA - 095 R - 12

Technical Data

	Brake Caliper DV 035 FPA				
	with thruster 065	with thruster 085	with thruster 095	with thruster 115	with thruster 125
Brake disc diameter	Braking torque	Braking torque	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm	Nm	Nm
300	400	230	830	1350	1750
355	500	290	1050	1700	2150
430	630	360	1300	2100	2700
520	780	450	1600	2650	3350
630	970	560	2000	3250	4150
710	1100	640	2300	3750	4750
800	1250	730	2600	4250	5450
Clamping force	4300 N	2500 N	8900 N	14500 N	18500 N
Air pressure	min. 5 bar max. 8 bar	min. 1,7 bar max. 8 bar	min. 5 bar max. 8 bar	min. 5 bar max. 8 bar	min. 6,5 bar max. 8 bar
Air volume per activation	max. 72 cm ³	max. 140 cm ³	max. 140 cm ³	max. 460 cm ³	max. 460 cm ³
Weight	10,9 kg	13,3 kg	13,3 kg	14,9 kg	14,9 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.


spring activated – pneumatically released

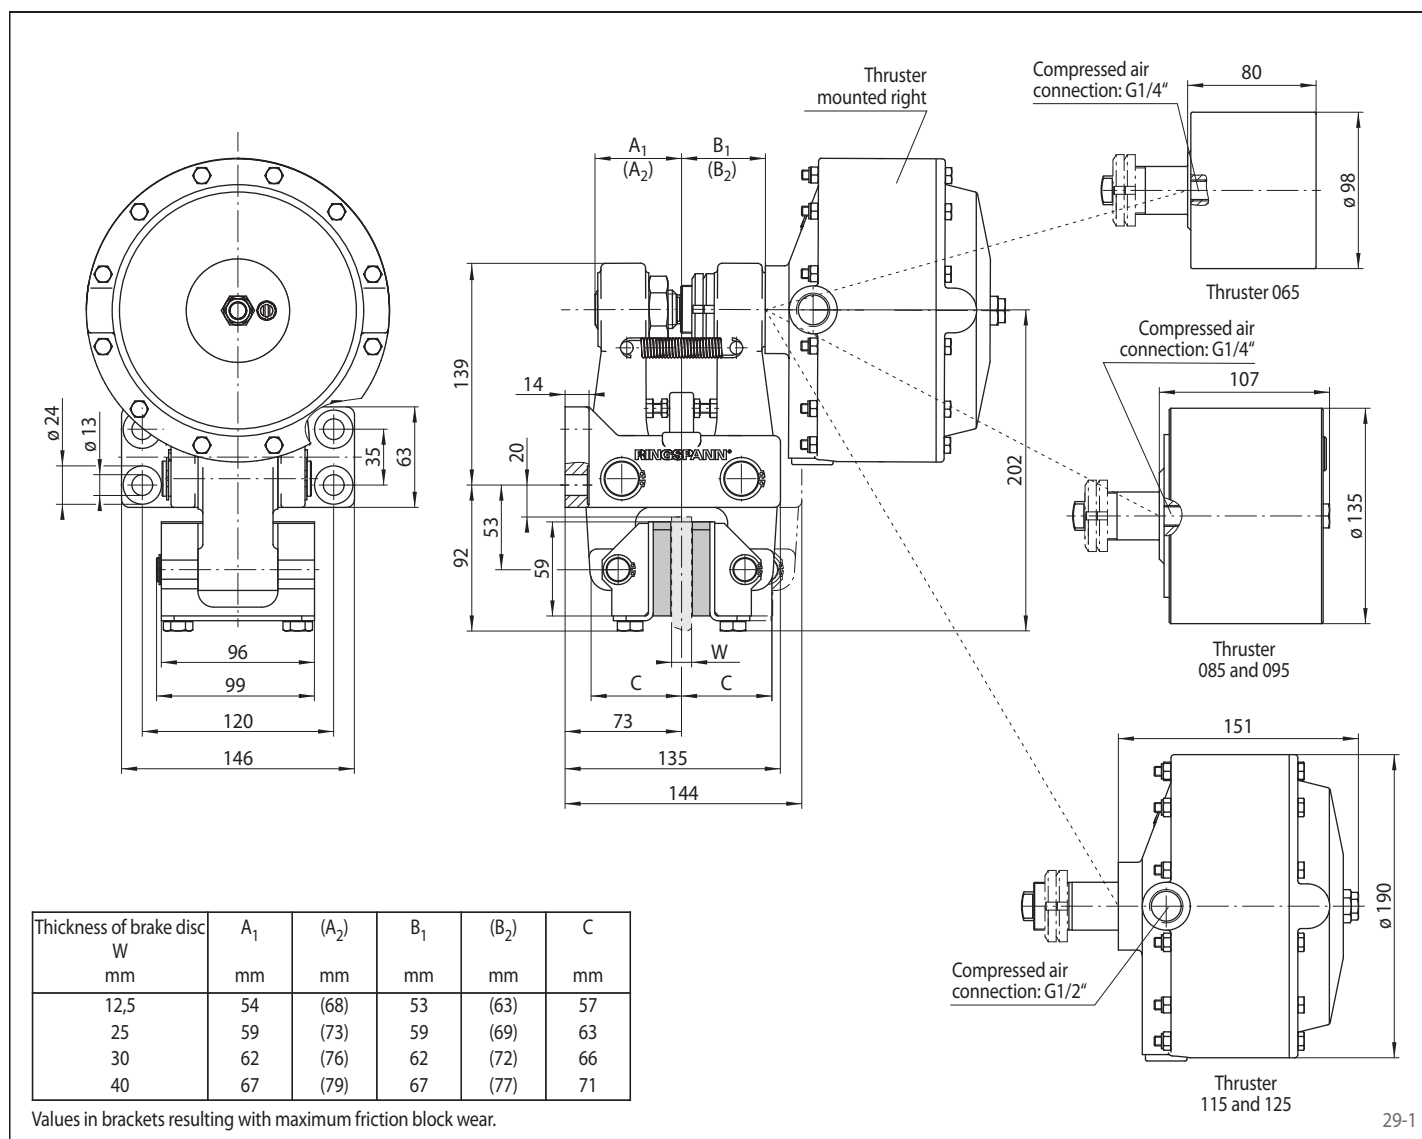

Brake Caliper DH 035 FPA

RINGSPANN®

spring activated – pneumatically released

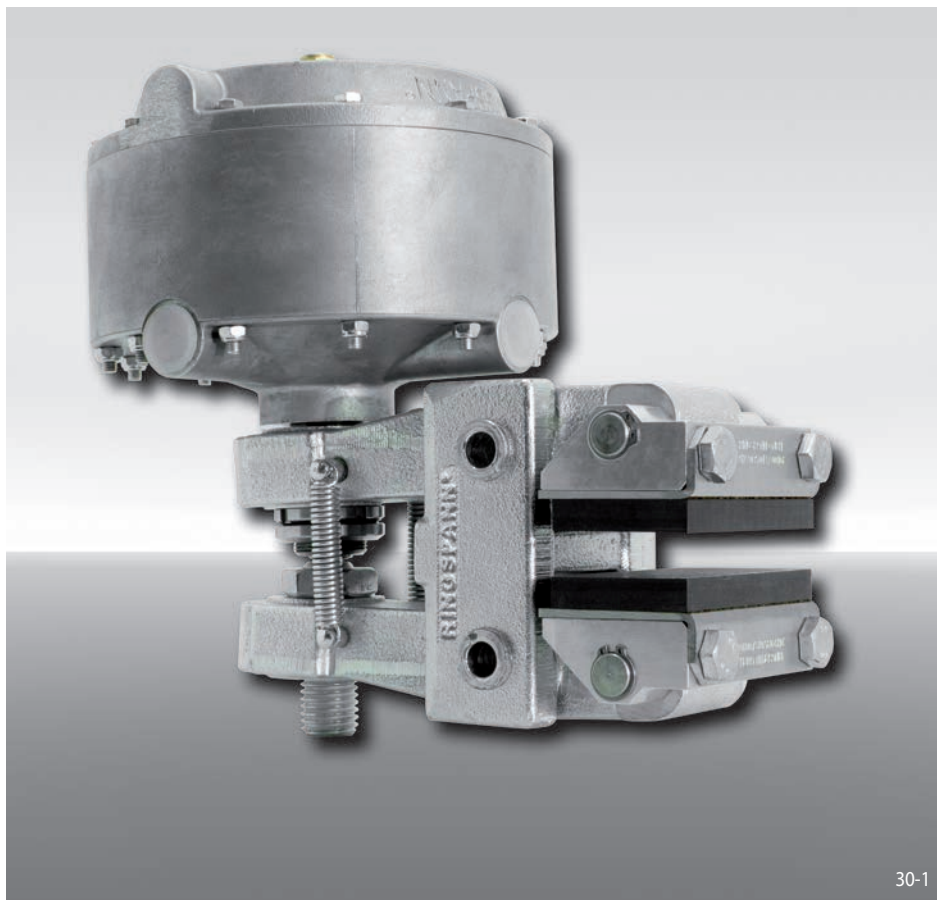

30-1

Features

Features	Code
Brake Caliper	D
Mounting to the machine at right angles to the brake disc	H
Frame size 035	035
Spring activated	F
Pneumatically released	P
Automatic adjustment to accommodate friction block wear	A
Thrusters 065, 085, 095, 115 or 125 are available	065 to 125
Thruster mounted right or left available	R L
Thickness of brake disc 12,5 mm, 25 mm, 30 mm or 40 mm	12 to 40

Example for ordering

Brake Caliper DH 035 FPA, thruster 095, thruster mounted right, thickness of brake disc 12,5 mm:

DH 035 FPA - 095 R - 12


Technical Data

	Brake Caliper DH 035 FPA				
	with thruster 065	with thruster 085	with thruster 095	with thruster 115	with thruster 125
Brake disc diameter	Braking torque	Braking torque	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm	Nm	Nm
300	400	230	830	1350	1750
355	500	290	1050	1700	2150
430	630	360	1300	2100	2700
520	780	450	1600	2650	3350
630	970	560	2000	3250	4150
710	1100	640	2300	3750	4750
800	1250	730	2600	4250	5450
Clamping force	4300 N	2500 N	8900 N	14500 N	18500 N
Air pressure	min. 5 bar max. 8 bar	min. 1,7 bar max. 8 bar	min. 5 bar max. 8 bar	min. 5 bar max. 8 bar	min. 6,5 bar max. 8 bar
Air volume per activation	max. 72 cm ³	max. 140 cm ³	max. 140 cm ³	max. 460 cm ³	max. 460 cm ³
Weight	10,9 kg	13,3 kg	13,3 kg	14,9 kg	14,9 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Brake Caliper DH 035 FPA


spring activated – pneumatically released

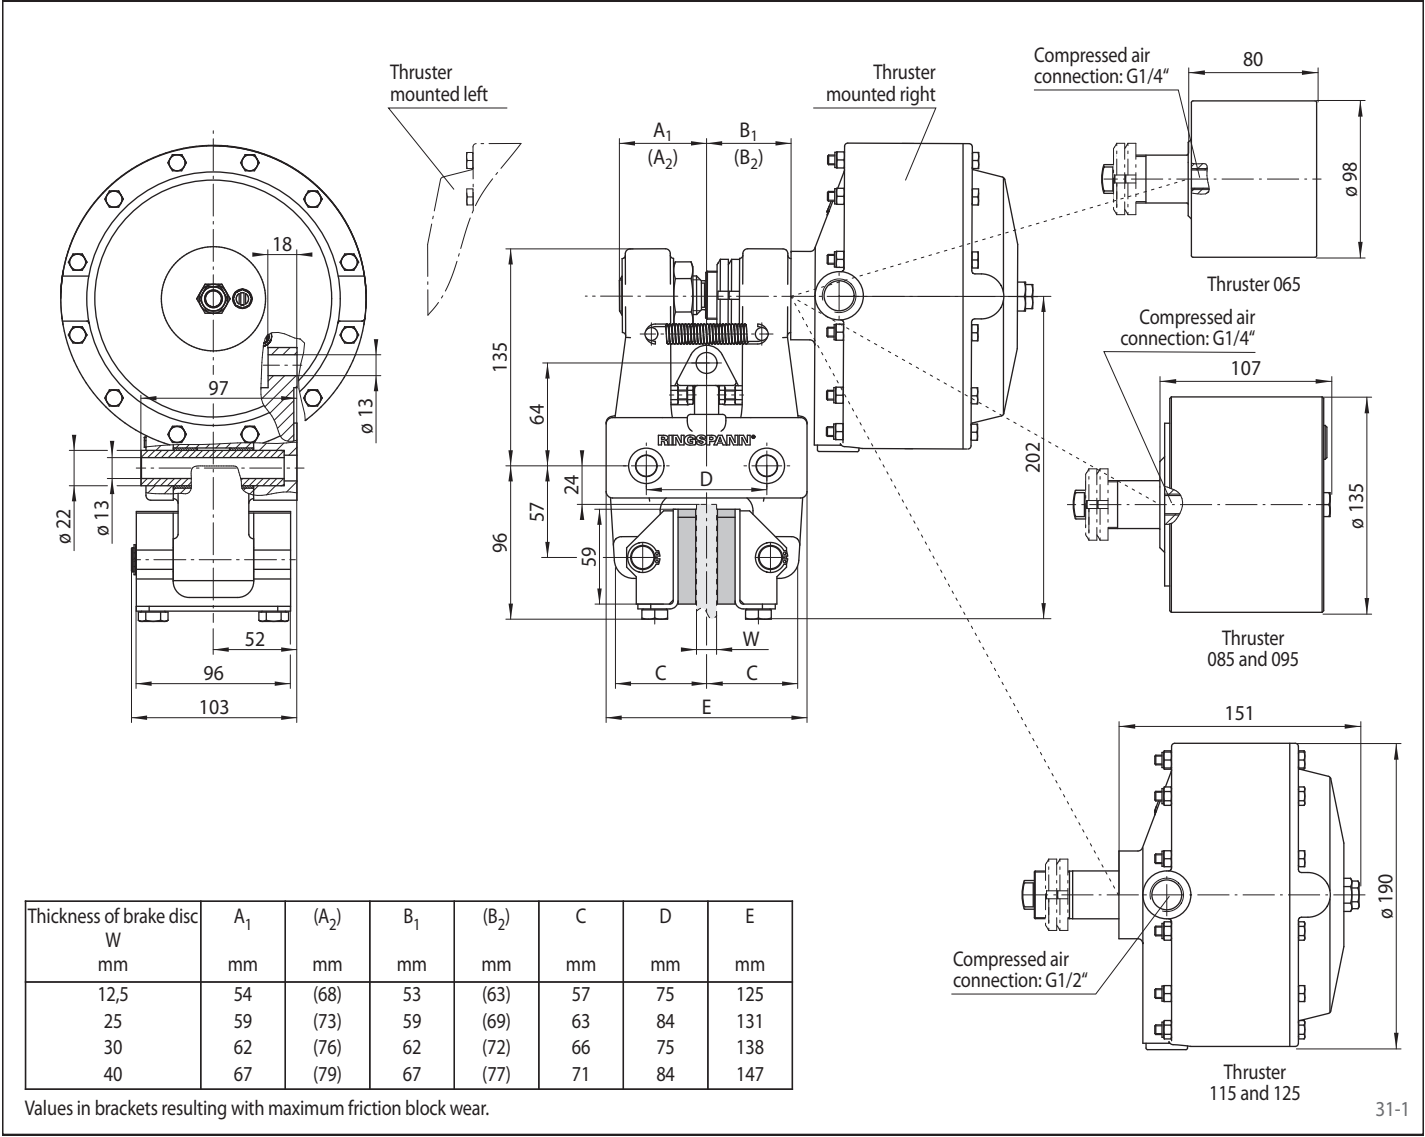

Brake Caliper DU 060 FPM

spring activated – pneumatically released

RINGSPANN®

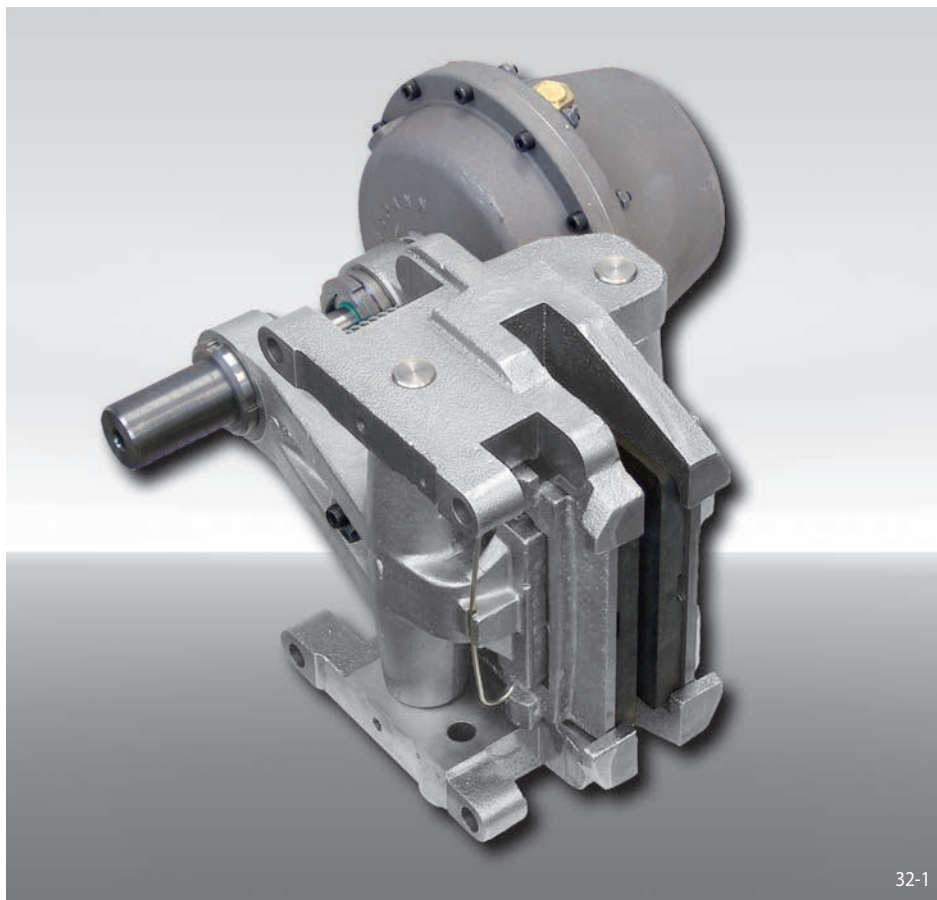

32-1

Features

Brake Caliper

Code

D

Mounting to the machine, can be made either parallel or at the right angles to the brake disc

U

Frame size 060

060

Spring activated

F

Pneumatically released

P

Manual adjustment to accommodate friction block wear

M

Thrusters 111, 122, 130, 135, 140, 150, 155 or 160 are available

111
to
160

Thruster mounted right or left available

R
L

Thickness of brake disc 25 mm or 40 mm

25
40

Example for ordering

Brake Caliper DU 060 FPM, thruster 130, thruster mounted right, thickness of brake disc 25 mm:

DU 060 FPM - 130 R - 25


Technical Data

	Brake Caliper DU 060 FPM							
	with thruster 111	with thruster 122	with thruster 130	with thruster 135	with thruster 140	with thruster 150	with thruster 155	with thruster 160
Brake disc diameter	Braking torque	Braking torque	Braking torque	Braking torque	Braking torque	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm	Nm	Nm	Nm	Nm	Nm
630	4900	6300	2700	5400	7800	7300	10300	13000
710	5600	7300	3100	6200	9000	8500	12000	15500
800	6500	8400	3600	7200	10300	9700	14000	17500
900	7400	9700	4100	8300	11900	11200	16000	20500
1000	8400	10900	4700	9300	13500	12500	18000	23000
1250	10700	14000	6000	12000	17000	16000	23000	29500
1600	14000	18500	7800	16000	22500	21000	30000	38500
Clamping force	24000 N	31000 N	13200 N	26500 N	38000 N	36000 N	51000 N	65000 N
Air pressure	min. 5 bar max. 8 bar	min. 6,5 bar max. 8 bar	min. 2,8 bar max. 8,5 bar	min. 5,5 bar max. 8,5 bar	min. 8,5 bar max. 10 bar	min. 4,5 bar max. 8,5 bar	min. 5,5 bar max. 8,5 bar	min. 7,6 bar max. 8,5 bar
Air volume per activation	max. 80 cm ³	max. 80 cm ³	max. 200 cm ³	max. 200 cm ³	max. 200 cm ³	max. 400 cm ³	max. 400 cm ³	max. 400 cm ³
Weight	60 kg	60 kg	62 kg	62 kg	62 kg	70 kg	70 kg	70 kg




The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Brake Caliper DU 060 FPM

spring activated – pneumatically released

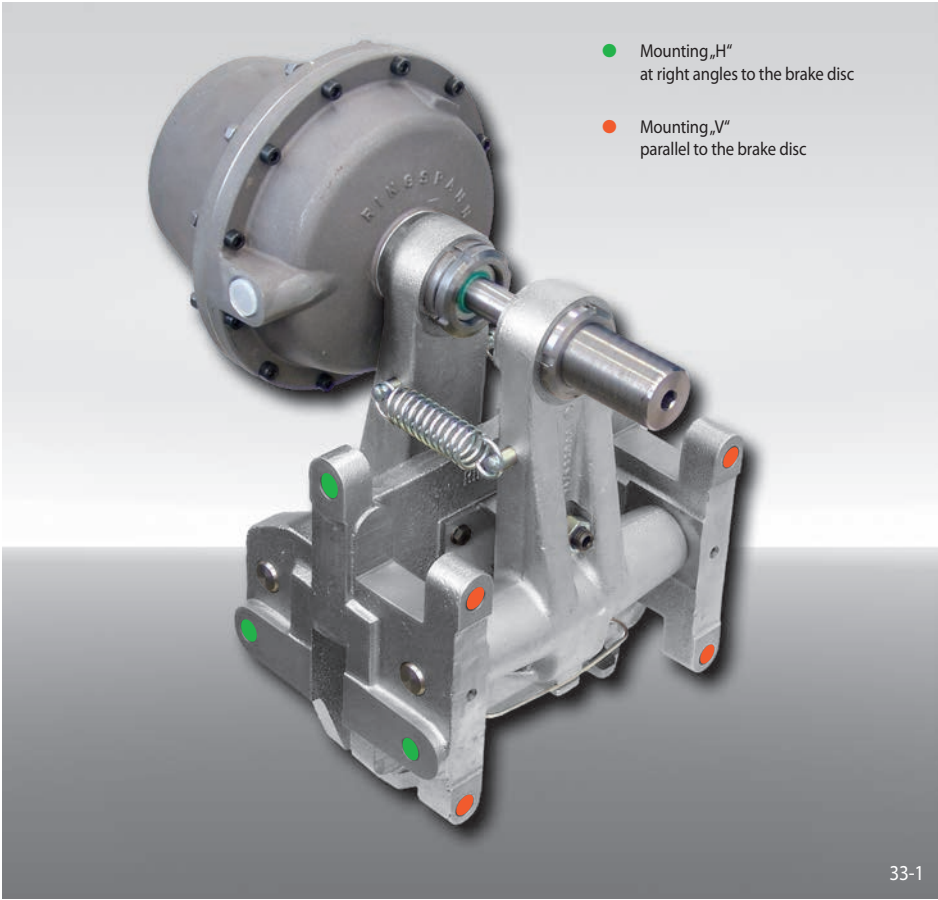


Frame Design

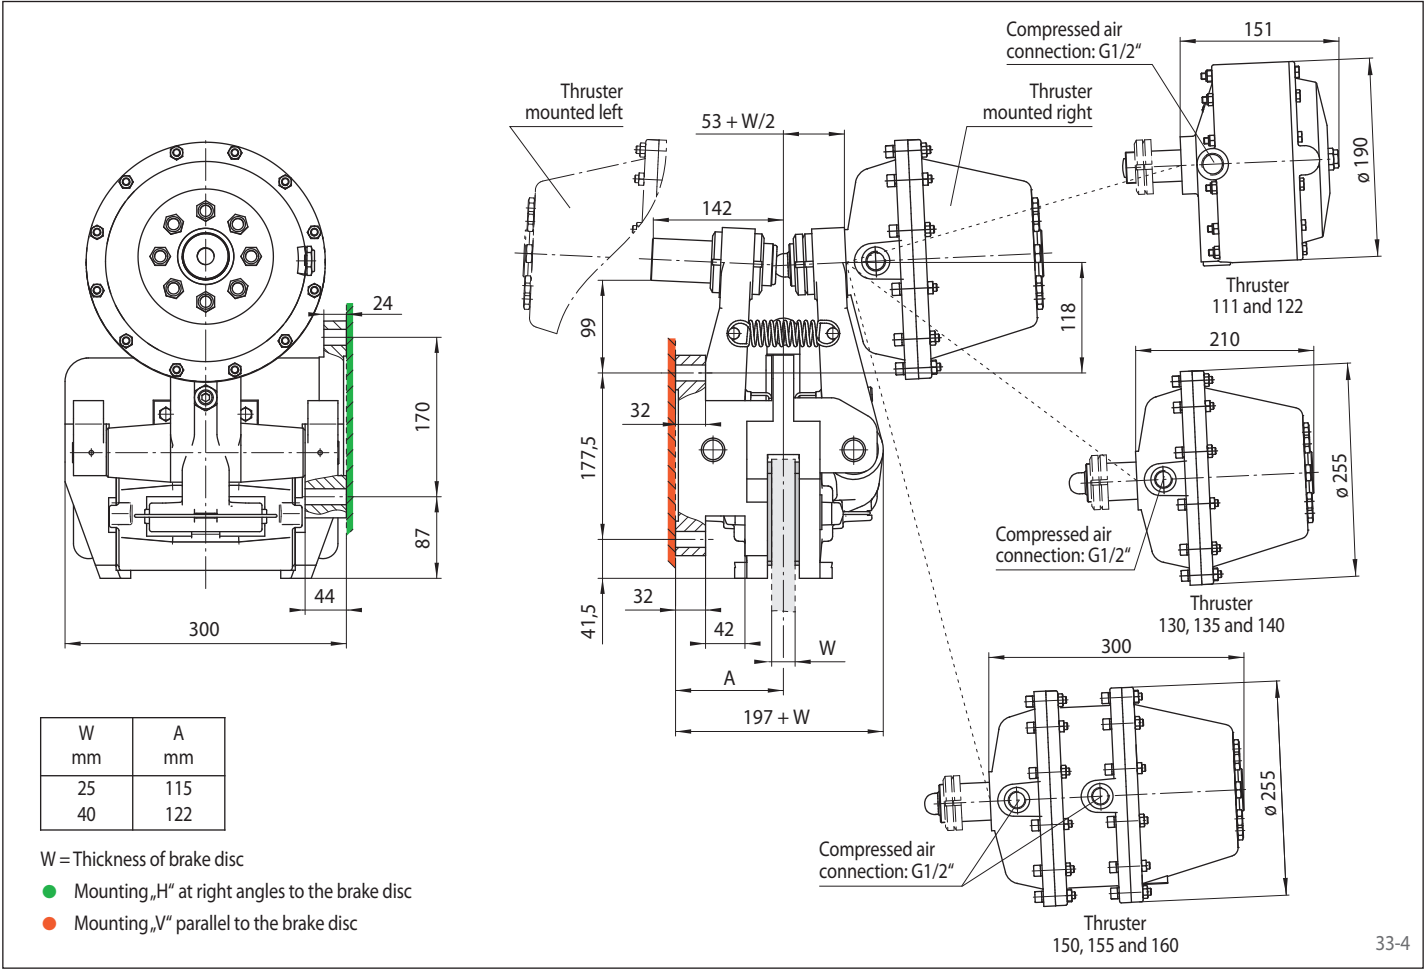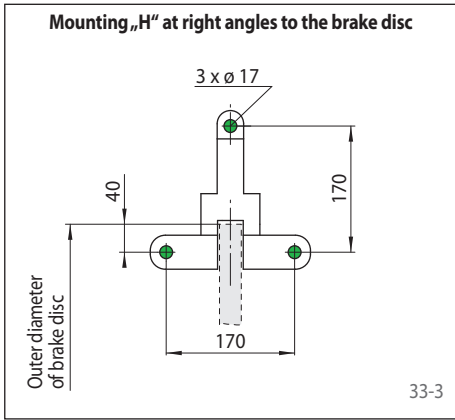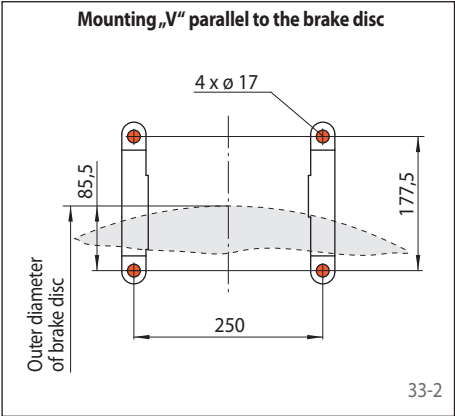

Brake Caliper DV 020 FHM

spring activated – hydraulically released

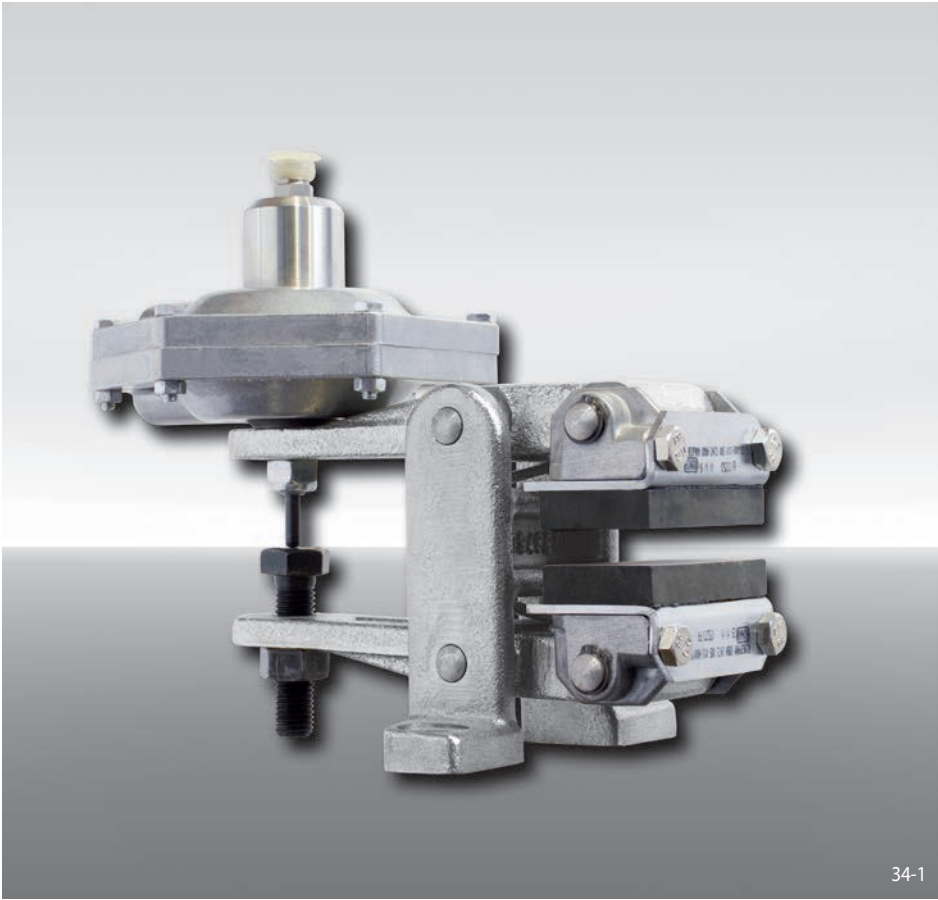


34-1

Features	Code
Brake Caliper	D
Mounting to the machine parallel to the brake disc	V
Frame size 020	020
Spring activated	F
Hydraulically released	H
Manual adjustment to accommodate friction block wear	M
Thruster 210	210
Thruster mounted right or left available	R L
Thickness of brake disc 12,5 mm	12

Example for ordering

Brake Caliper DV 020 FHM, thruster 210, thruster mounted right, thickness of brake disc 12,5 mm:

DV 020 FHM - 210 R - 12

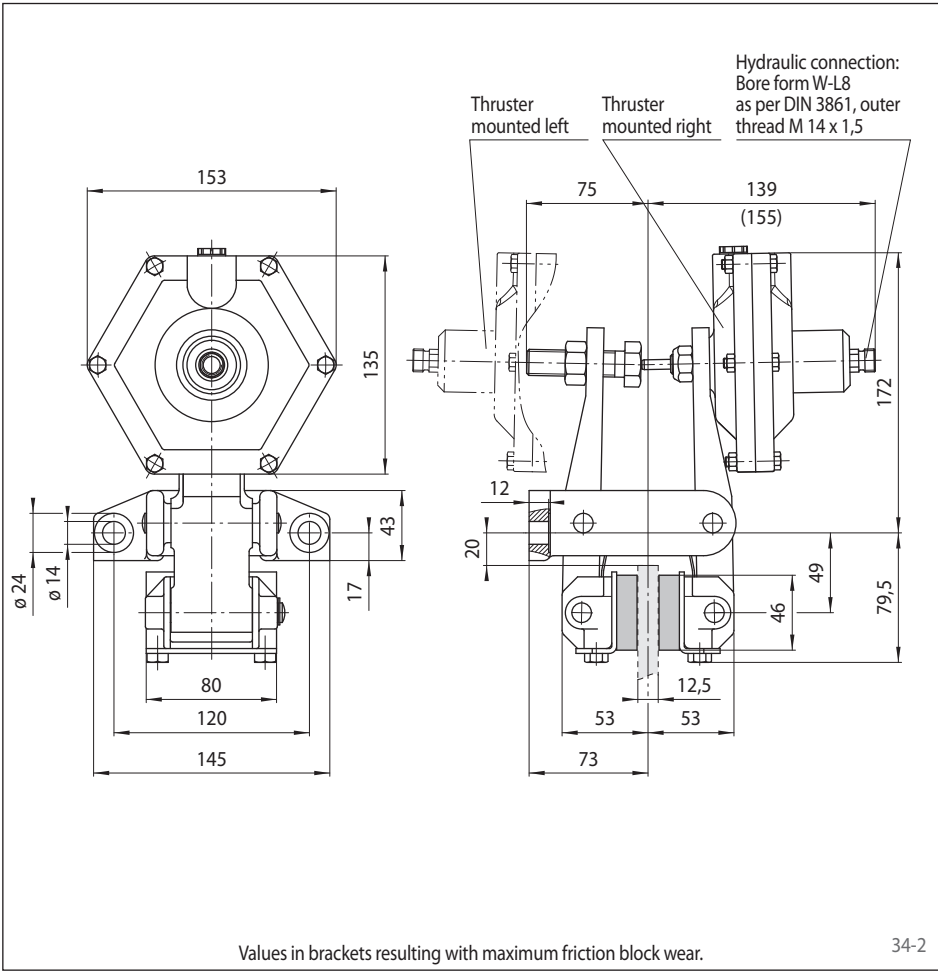

34-2


Technical Data

Brake Caliper DV 020 FHM with thruster 210	
Brake disc diameter	Braking torque
mm	Nm
200	200
250	270
300	340
355	420
430	520
520	650
Clamping force	3 500 N
Oil pressure	min. 65 bar max. 100 bar
Oil volume	max. 2,5 cm ³
Weight	5,4 kg


The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Brake Caliper DH 020 FHM

spring activated – hydraulically released

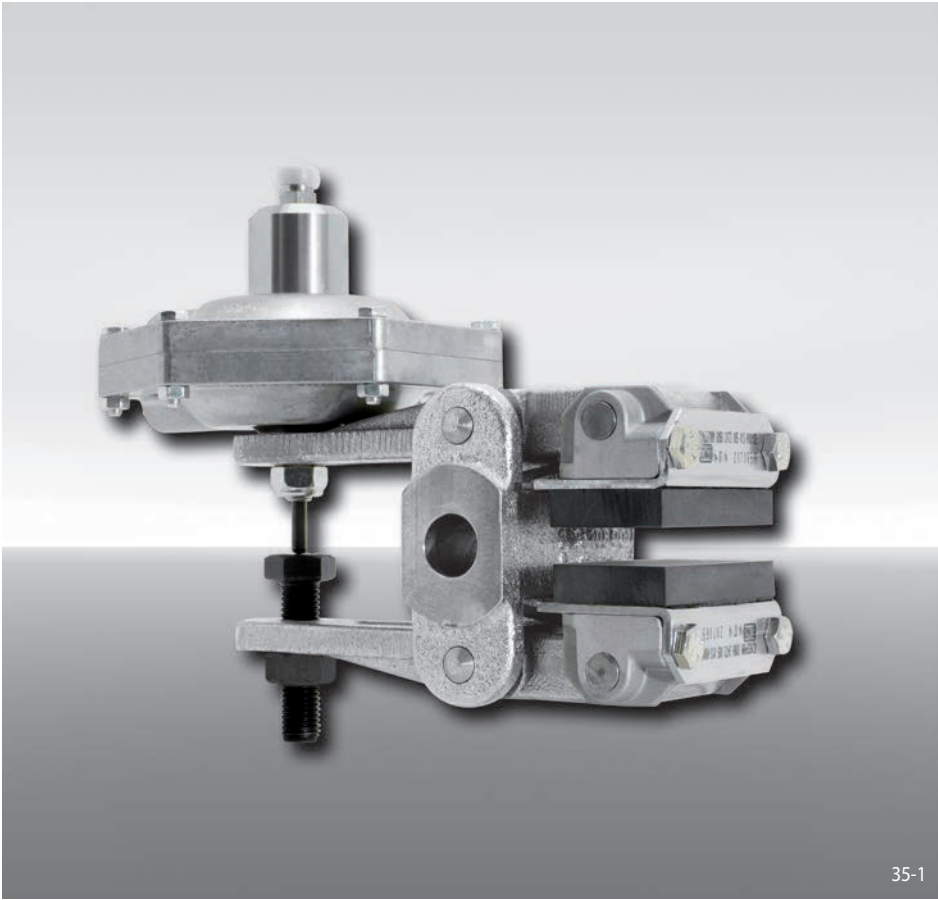

35-1

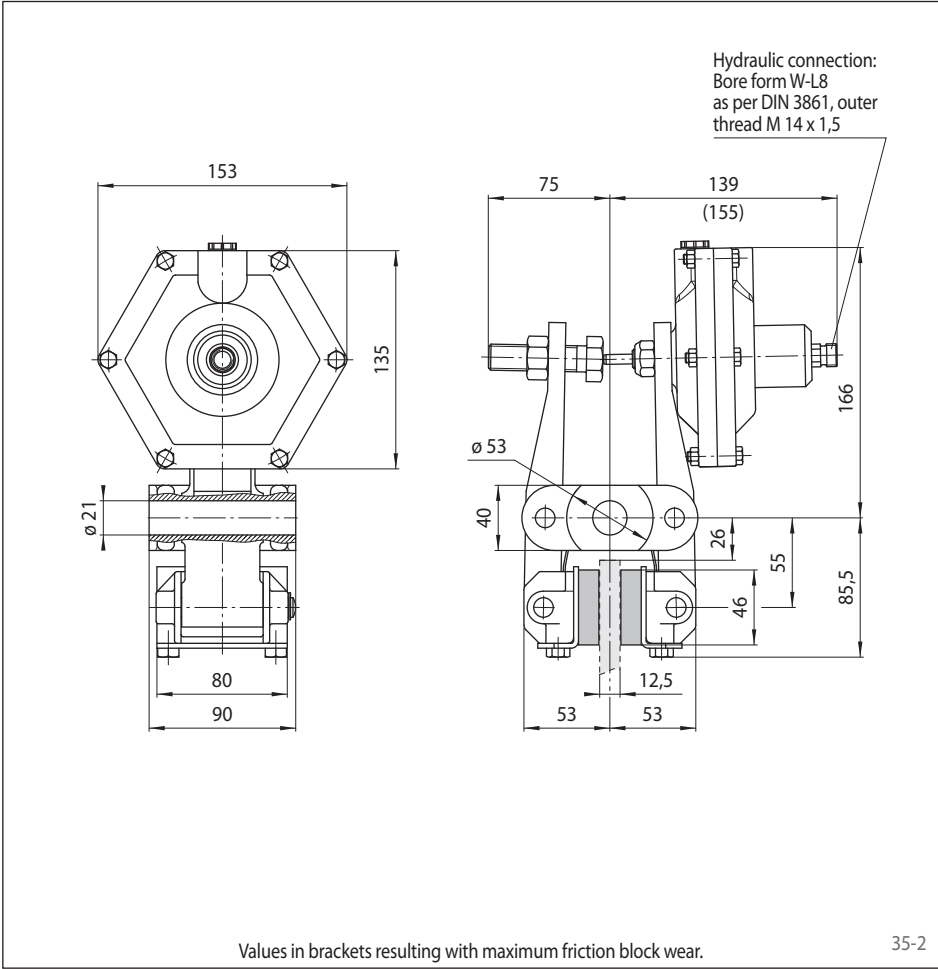

35-2

Features	Code
Brake Caliper	D
Mounting to the machine at right angles to the brake disc	H
Frame size 020	020
Spring activated	F
Hydraulically released	H
Manual adjustment to accommodate friction block wear	M
Thruster 210	210
Position of the thruster to the right or left can be defined by turning the brake around during installation	U
Thickness of brake disc 12,5 mm	12

Example for ordering

Brake Caliper DH 020 FHM, thruster 210, position of the thruster can be to the right or left, thickness of brake disc 12,5 mm:

DH 020 FHM - 210 U - 12


Technical Data

Brake Caliper DH 020 FHM with thruster 210	
Brake disc diameter	Braking torque
mm	Nm
200	200
250	270
300	340
355	420
430	520
520	650
Clamping force	3500 N
Oil pressure	min. 65 bar max. 100 bar
Oil volume	max. 2,5 cm ³
Weight	5,4 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Brake Caliper DV 030 FHM

spring activated – hydraulically released

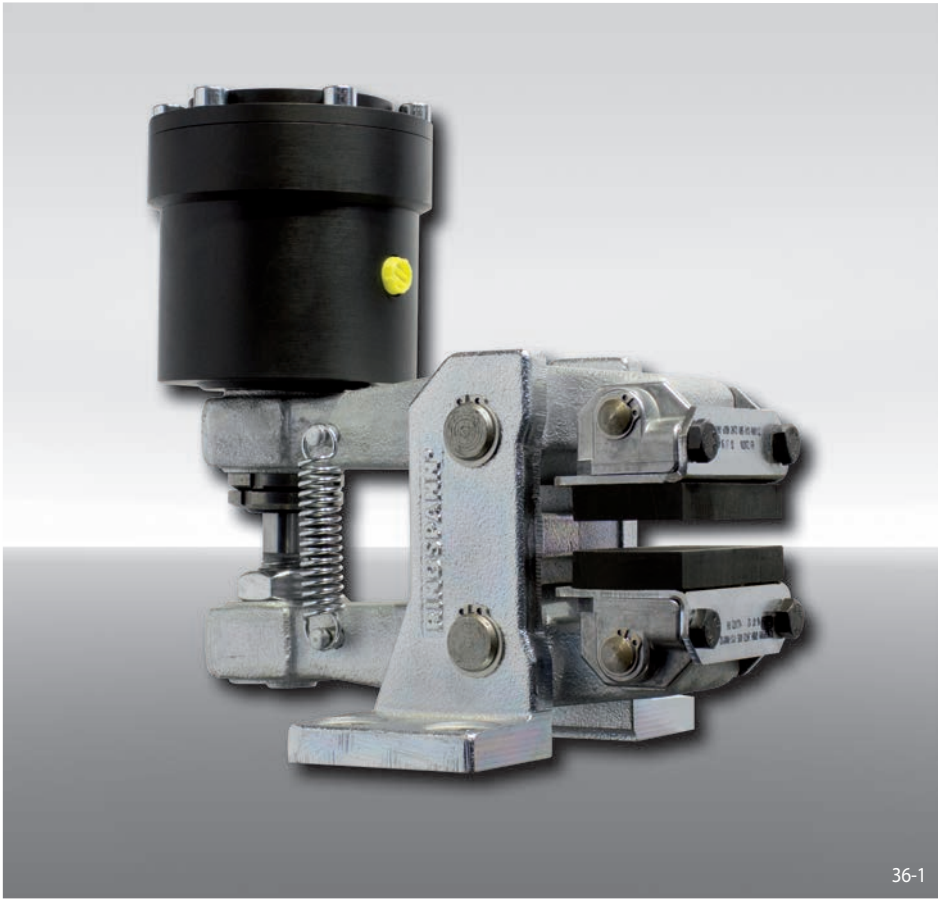

Features	Code
Brake Caliper	D
Mounting to the machine parallel to the brake disc	V
Frame size 030	030
Spring activated	F
Hydraulically released	H
Manual adjustment to accommodate friction block wear	M
Thruster 250	250
Thruster mounted right or left available	R L
Thickness of brake disc 12,5 mm or 25 mm	12 25

Example for ordering


Brake Caliper DV 030 FHM, thruster 250, thruster mounted right, thickness of brake disc 12,5 mm:

DV 030 FHM - 250 R - 12

Technical Data

Brake Caliper DV 030 FHM with thruster 250	
Brake disc diameter	Braking torque
mm	Nm
200	620
250	840
300	1 100
355	1 300
430	1 600
520	2 000
Clamping force	11 000 N
Oil pressure	min. 40 bar max. 120 bar
Oil volume	max. 6 cm ³
Weight	14,5 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

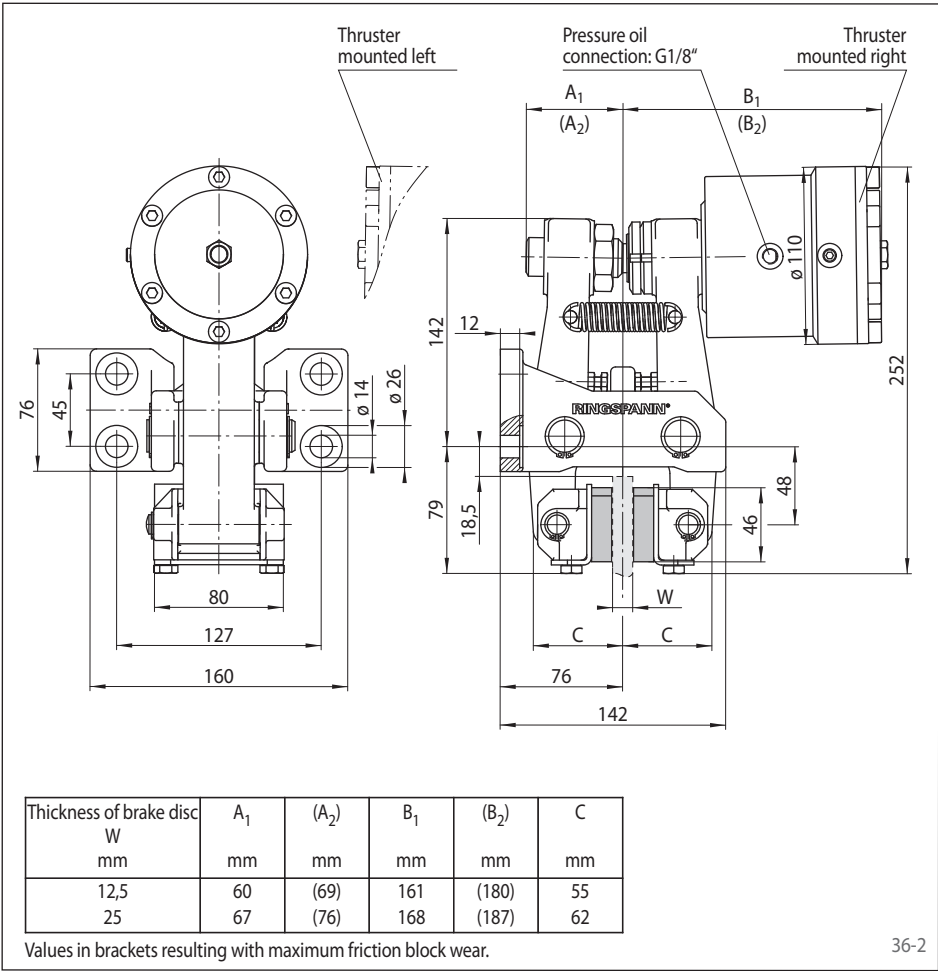

Thickness of brake disc W mm	A ₁ mm	(A ₂) mm	B ₁ mm	(B ₂) mm	C mm
12,5	60	(69)	161	(180)	55
25	67	(76)	168	(187)	62

Values in brackets resulting with maximum friction block wear.

spring activated – hydraulically released

Features

Code

Brake Caliper	D
Mounting to the machine at right angles to the brake disc	H
Frame size 030	030
Spring activated	F
Hydraulically released	H
Manual adjustment to accommodate friction block wear	M
Thruster 250	250
Thruster mounted right or left available	R L
Thickness of brake disc 12,5 mm or 25 mm	12 25



Brake Caliper DH 030 FHM, thruster 250,
thruster mounted right, thickness of
brake disc 12,5 mm:

DH 030 FHM - 250 R - 12

Technical Data


	Brake Caliper DH 030 FHM with thruster 250
Brake disc diameter	Braking torque
mm	Nm
200	620
250	840
300	1 100
355	1 300
430	1 600
520	2 000
Clamping force	11 000 N
Oil pressure	min. 40 bar max. 120 bar
Oil volume	max. 6 cm ³
Weight	14,5 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0.4.

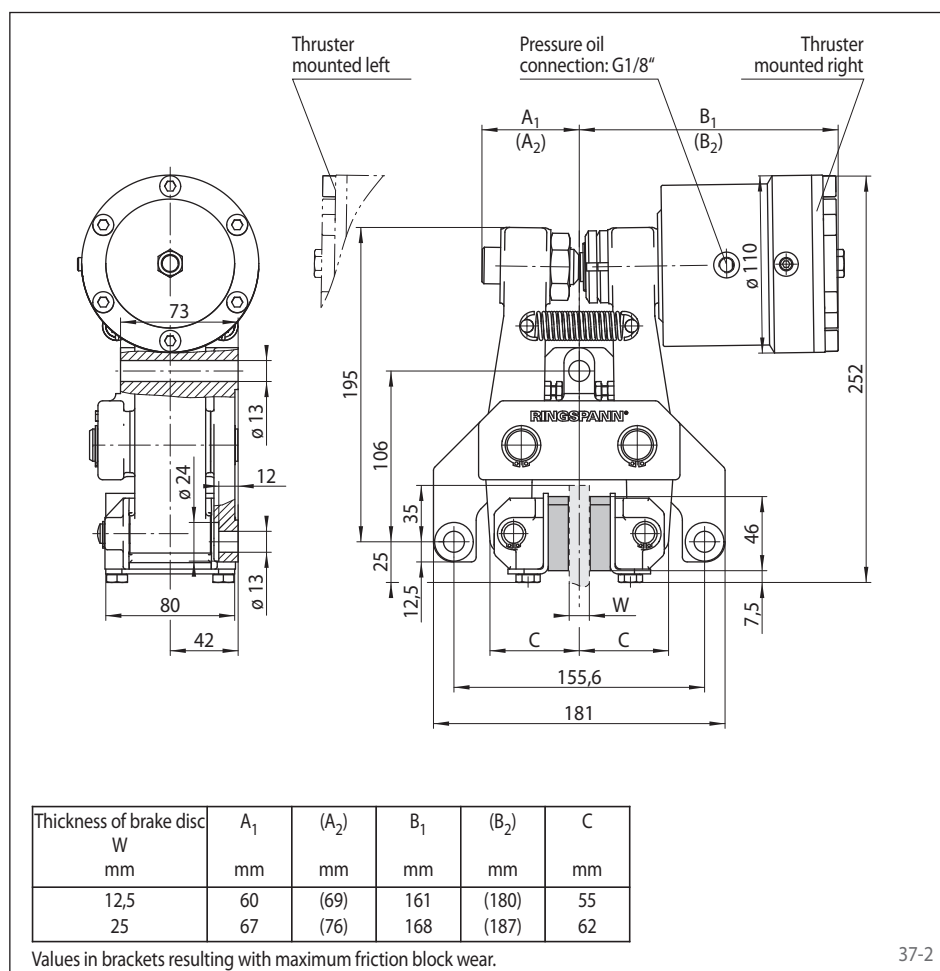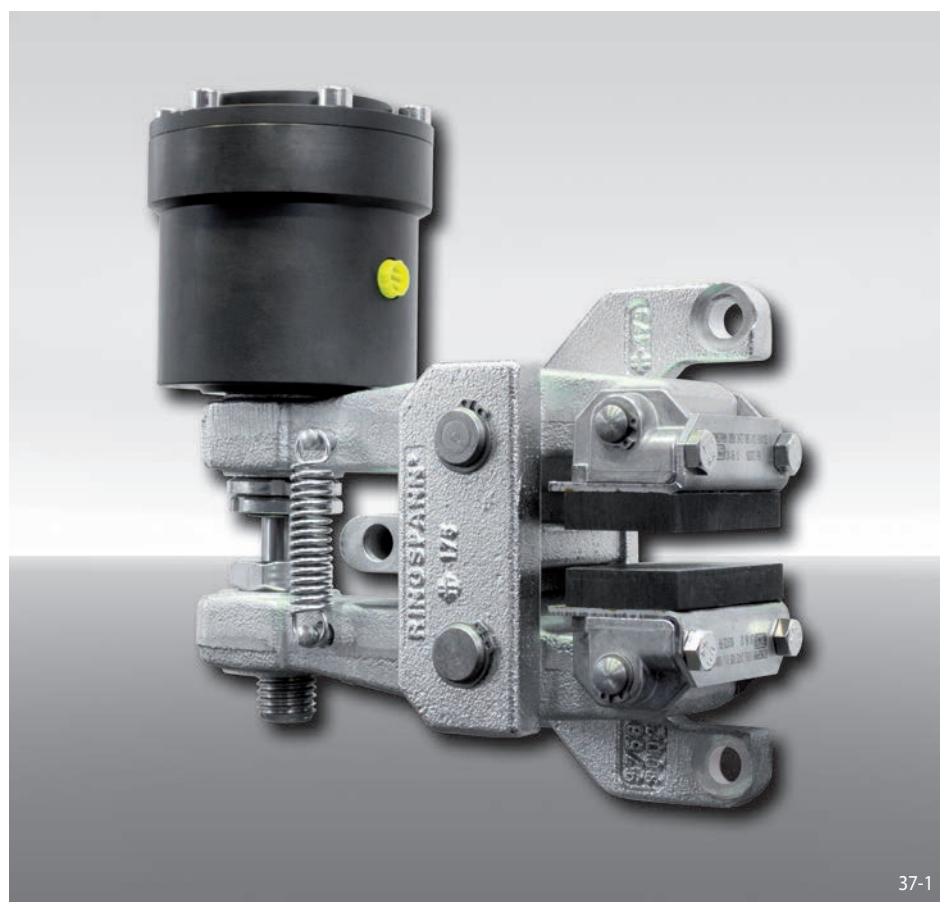

Brake Caliper DV 030 FHA

spring activated – hydraulically released

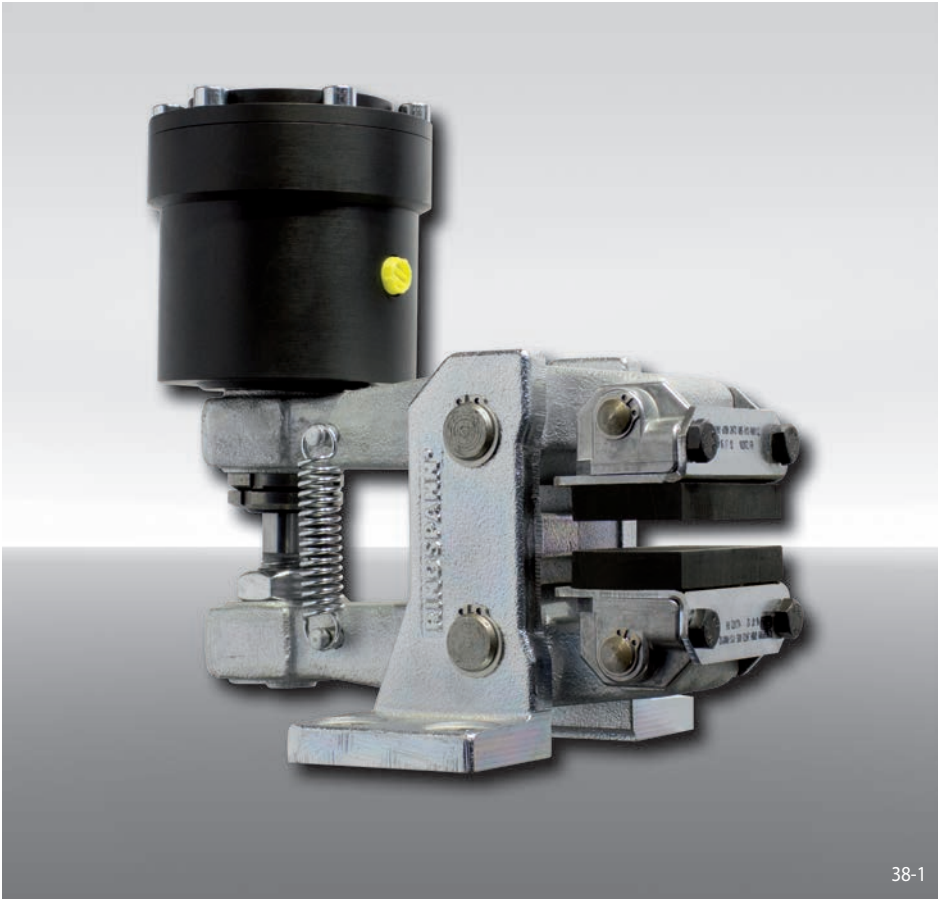

Features	Code
Brake Caliper	D
Mounting to the machine parallel to the brake disc	V
Frame size 030	030
Spring activated	F
Hydraulically released	H
Automatic adjustment to accommodate friction block wear	A
Thruster 240	240
Thruster mounted right or left available	R L
Thickness of brake disc 12,5 mm or 25 mm	12 25

Example for ordering


Brake Caliper DV 030 FHA, thruster 240, thruster mounted right, thickness of brake disc 12,5 mm:

DV 030 FHA - 240 R - 12

Technical Data


Brake Caliper DV 030 FHA with thruster 240	
Brake disc diameter	Braking torque
mm	Nm
200	620
250	840
300	1 100
355	1 300
430	1 600
520	2 000
Clamping force	11 000 N
Oil pressure	min. 40 bar max. 120 bar
Oil volume	max. 6 cm ³
Weight	14,2 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

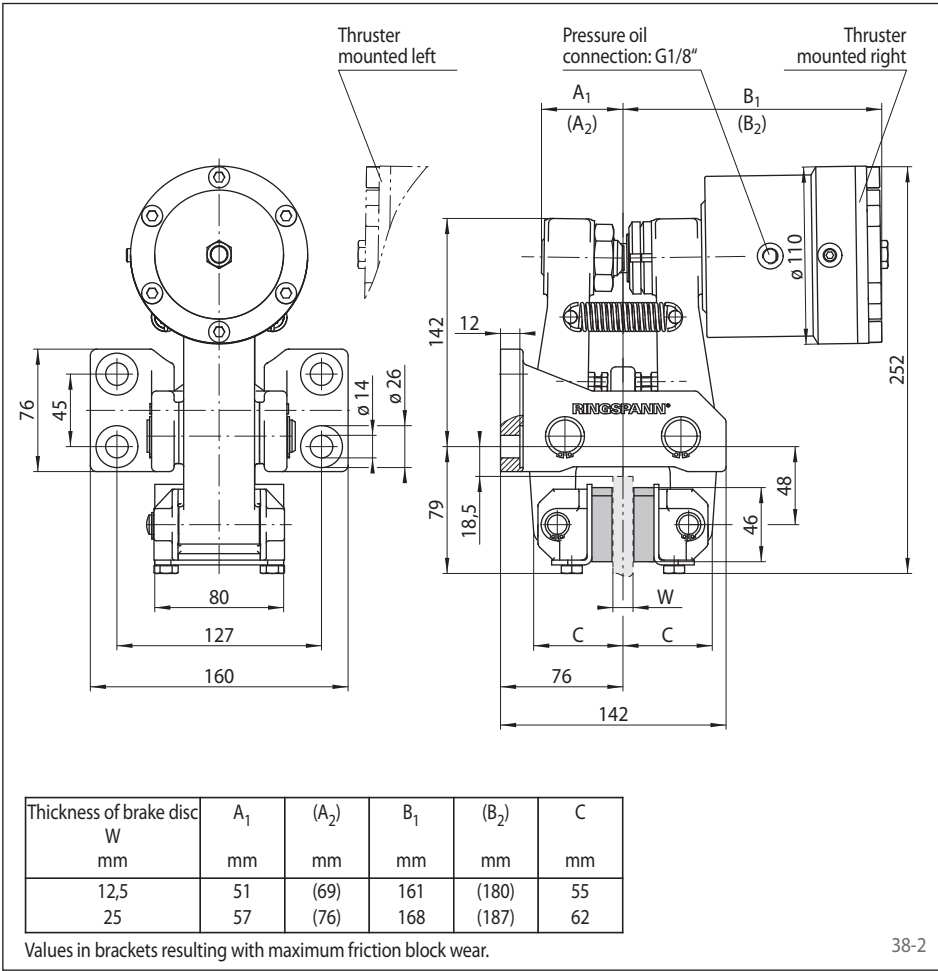

Brake Caliper DH 030 FHA

spring activated – hydraulically released

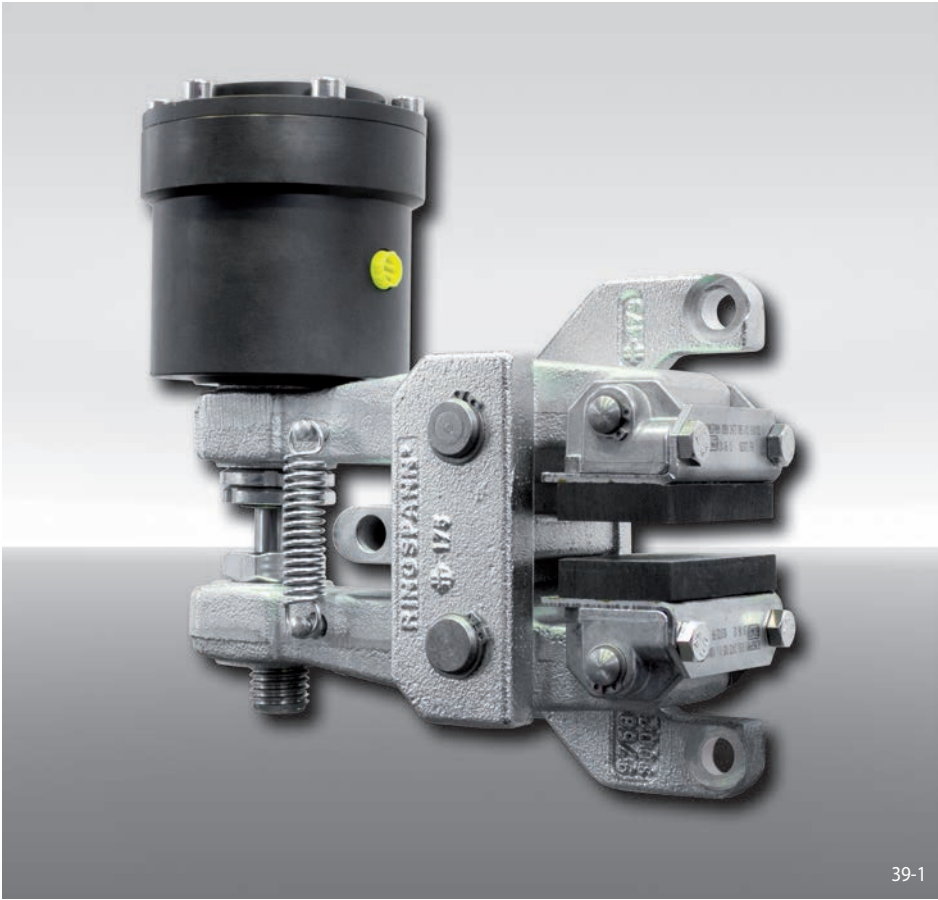


Features	Code
Brake Caliper	D
Mounting to the machine at right angles to the brake disc	H
Frame size 030	030
Spring activated	F
Hydraulically released	H
Automatic adjustment to accommodate friction block wear	A
Thruster 240	240
Thruster mounted right or left available	R L
Thickness of brake disc 12,5 mm or 25 mm	12 25

Example for ordering

Brake Caliper DH 030 FHA, thruster 240,
thruster mounted right, thickness of
brake disc 12,5 mm:

DH 030 FHA - 240 R - 12

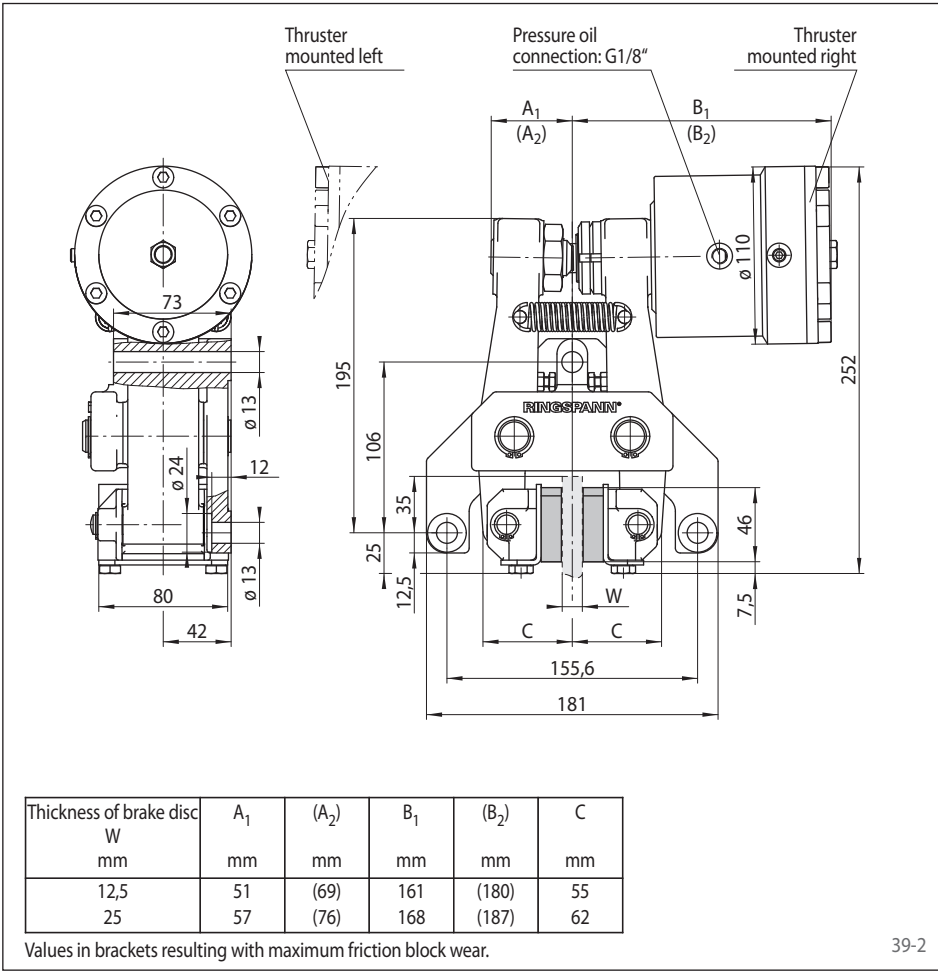

Technical Data

Brake Caliper DH 030 FHA with thruster 240	
Brake disc diameter mm	Braking torque Nm
200	620
250	840
300	1100
355	1300
430	1600
520	2000
Clamping force	11000 N
Oil pressure	min. 40 bar max. 120 bar
Oil volume	max. 6 cm ³
Weight	13,8 kg

The braking torques shown in the table are based on a
theoretical friction coefficient of 0,4.

spring activated – hydraulically released

Features

Code

Example for ordering

Brake Caliper DV 035 FHM, thruster 270,
thruster mounted right, thickness of
brake disc 12,5 mm:

DV 035 FHM - 270 R - 12

Technical Data

The braking torques shown in the table are based on a theoretical friction coefficient of 0.4.



spring activated – hydraulically released

Features

Code

Example for ordering

Brake Caliper DH 035 FHM, thruster 270,
thruster mounted right, thickness of
brake disc 12,5 mm:

DH 035 FHM - 270 R - 12


Technical Data

The braking torques shown in the table are based on a theoretical friction coefficient of 0.4.



Brake Caliper DV 035 FHA

spring activated – hydraulically released

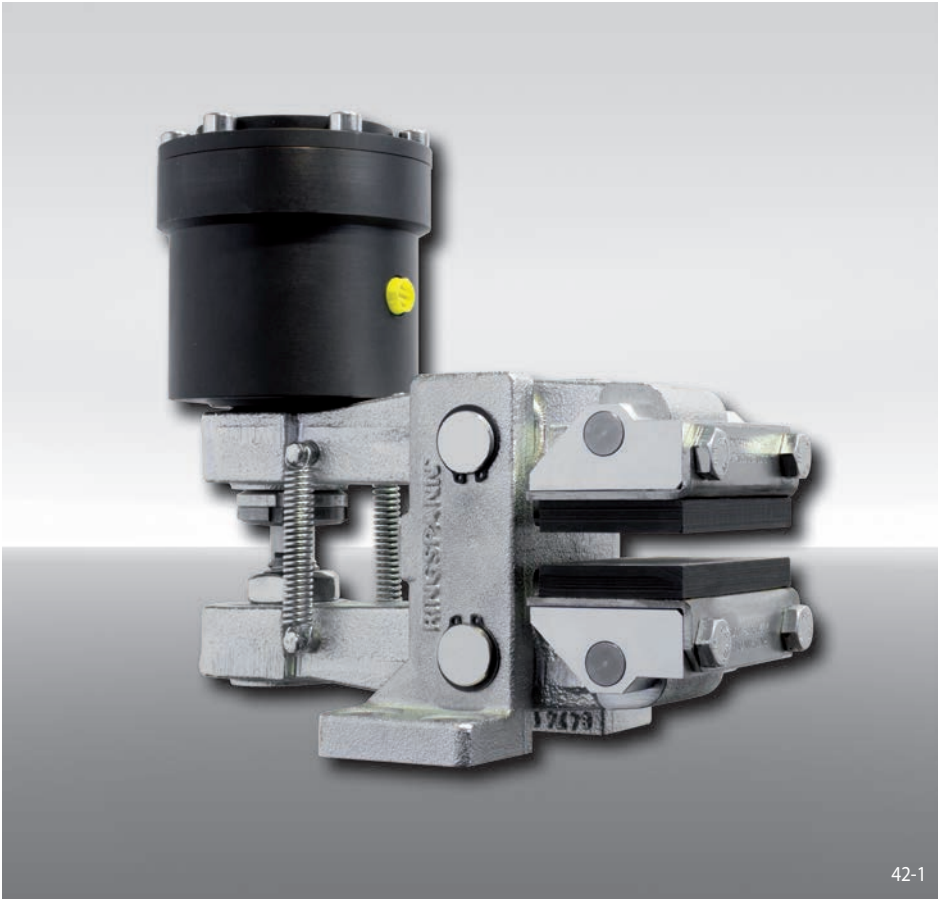

Features	Code
Brake Caliper	D
Mounting to the machine parallel to the brake disc	V
Frame size 035	035
Spring activated	F
Hydraulically released	H
Automatic adjustment to accommodate friction block wear	A
Thruster 260	260
Thruster mounted right or left available	R L
Thickness of brake disc 12,5 mm or 25 mm	12 25

Example for ordering


Brake Caliper DV 035 FHA, thruster 260, thruster mounted right, thickness of brake disc 12,5 mm:

DV 035 FHA - 260 R - 12

Technical Data


Brake Caliper DV 035 FHA with thruster 260	
Brake disc diameter	Braking torque
mm	Nm
300	1 500
355	1 850
430	2 350
520	3 000
630	3 600
710	4 100
800	4 700
Clamping force	16 000 N
Oil pressure	min. 55 bar max. 120 bar
Oil volume	max. 6 cm ³
Weight	13,9 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

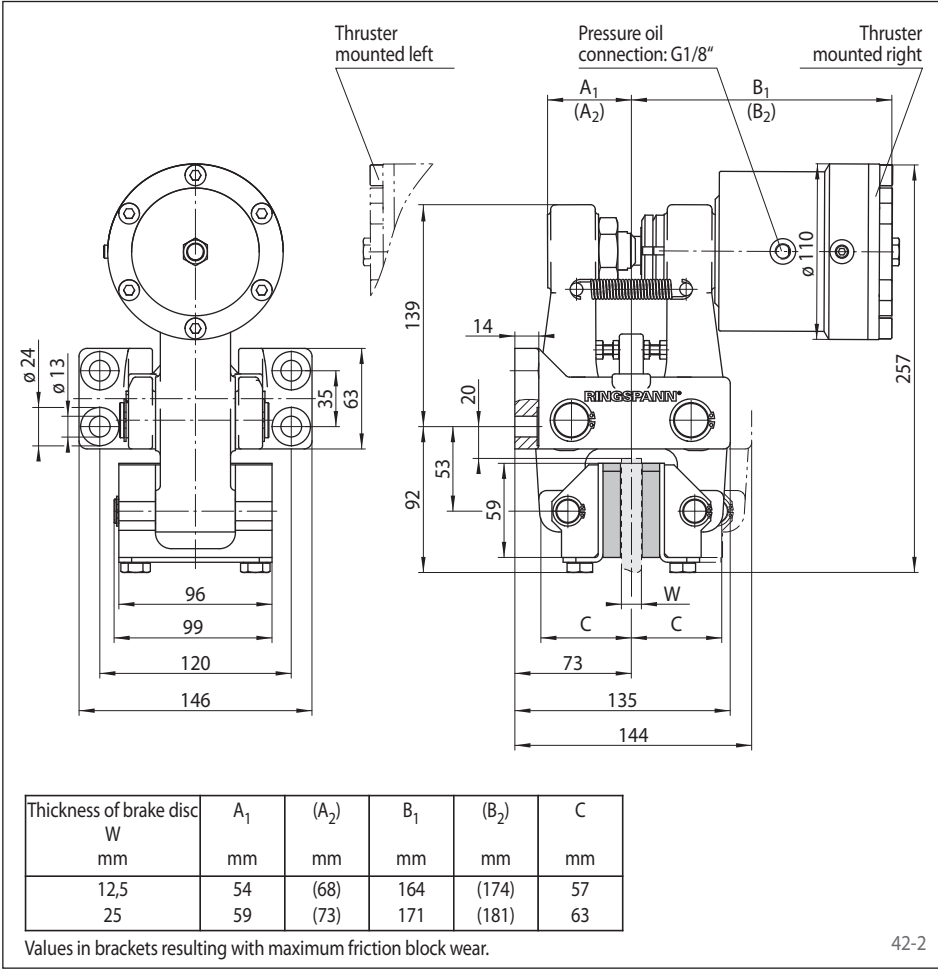

Brake Caliper DH 035 FHA

spring activated – hydraulically released

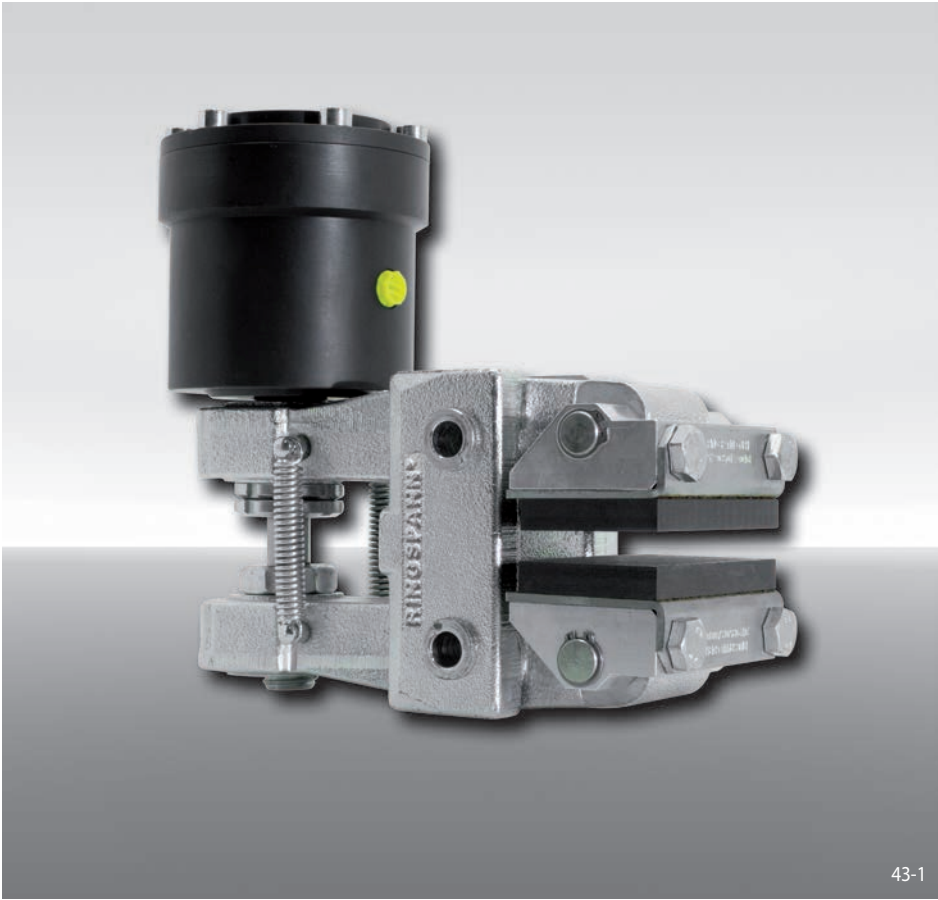

Features	Code
Brake Caliper	D
Mounting to the machine at right angles to the brake disc	H
Frame size 035	035
Spring activated	F
Hydraulically released	H
Automatic adjustment to accommodate friction block wear	A
Thruster 260	260
Thruster mounted right or left available	R L
Thickness of brake disc 12,5 mm or 25 mm	12 25

Example for ordering


Brake Caliper DH 035 FHA, thruster 260,
thruster mounted right, thickness of
brake disc 12,5 mm:

DH 035 FHA - 260 R - 12

Technical Data


Brake Caliper DH 035 FHA with thruster 260	
Brake disc diameter	Braking torque
mm	Nm
300	1500
355	1850
430	2350
520	3000
630	3600
710	4100
800	4700
Clamping force	16000 N
Oil pressure	min. 55 bar max. 120 bar
Oil volume	max. 6 cm ³
Weight	14,1 kg

The braking torques shown in the table are based on a
theoretical friction coefficient of 0,4.

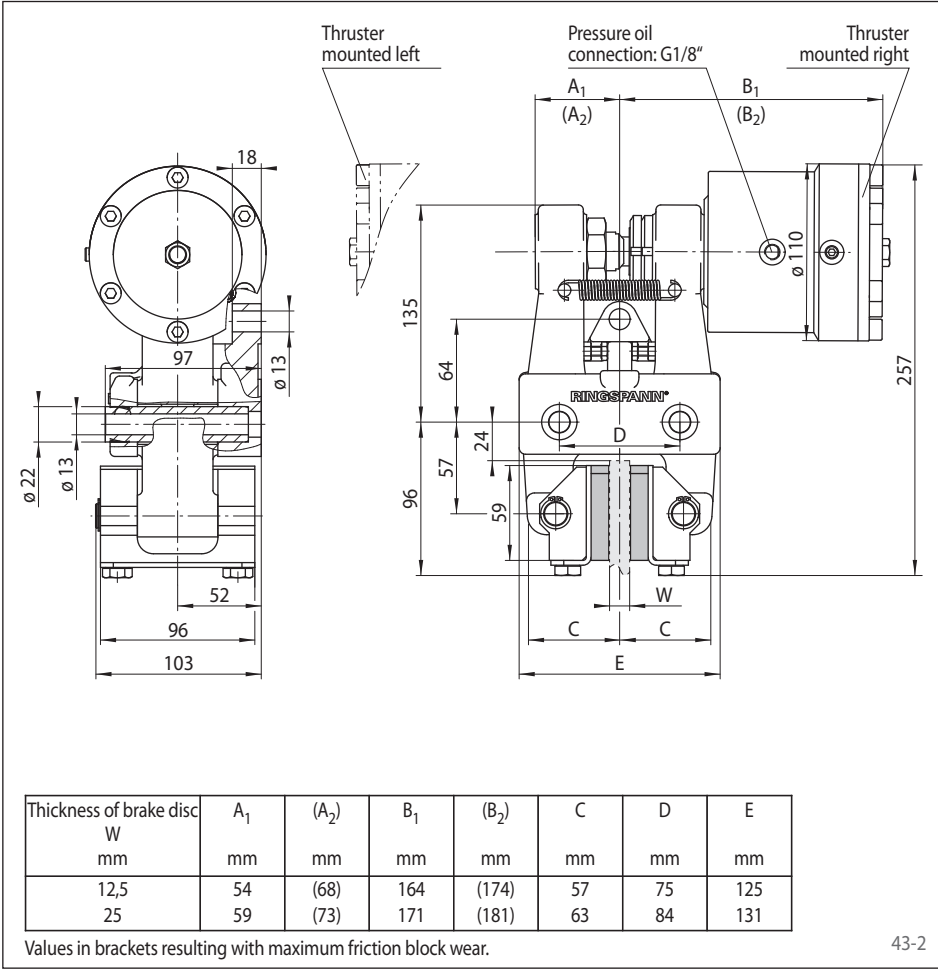

Brake Caliper DU 060 FHM

spring activated – hydraulically released

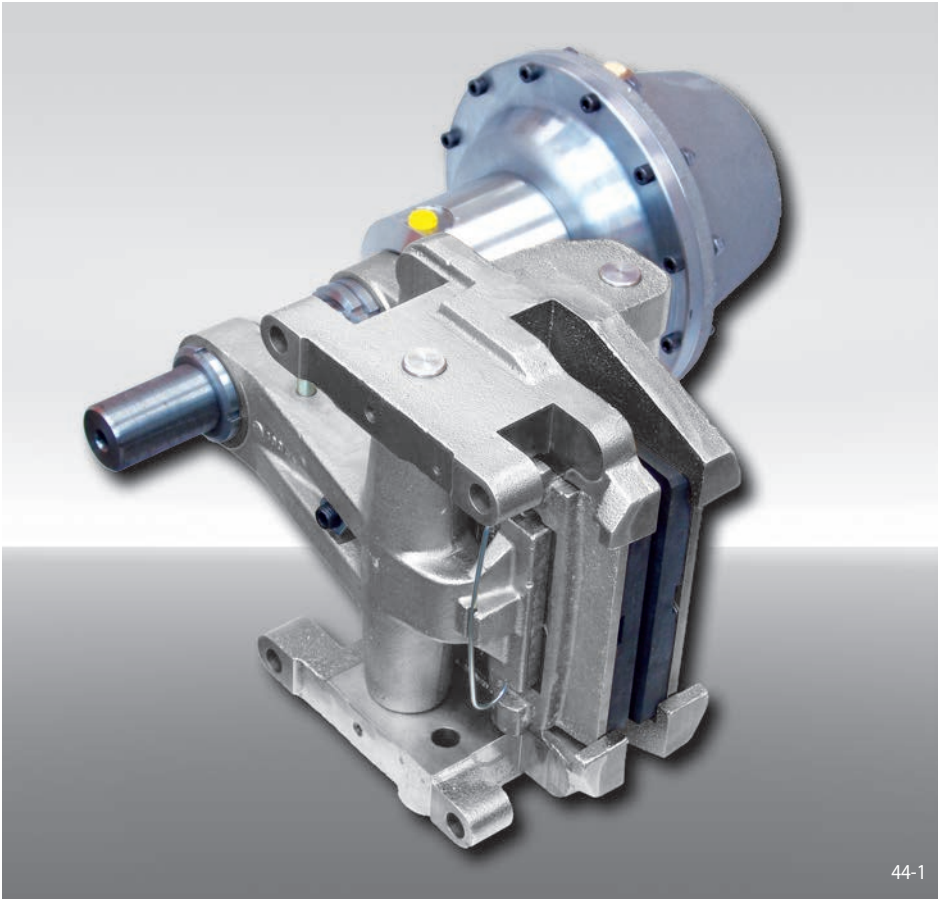

Features	Code
Brake Caliper	D
Mounting to the machine, can be made either parallel or at the right angles to the brake disc	U
Frame size 060	060
Spring activated	F
Hydraulically released	H
Manual adjustment to accommodate friction block wear	M
Thrusters 340, 350, 360 or 370 are available	340 to 370
Thruster mounted right or left available	R L
Thickness of brake disc 25 mm or 40 mm	25 40

Example for ordering

Brake Caliper DU 060 FHM, thruster 340, thruster mounted right, thickness of brake disc 25 mm:

DU 060 FHM - 340 R - 25


Technical Data

	Brake Caliper DU 060 FHM			
	with thruster 340	with thruster 350	with thruster 360	with thruster 370
Brake disc diameter	Braking torque	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm	Nm
630	2700	5400	7800	13500
710	3100	6200	9000	15500
800	3600	7200	10300	17500
900	4100	8300	11900	20500
1000	4700	9300	13400	23000
1250	6000	12000	17000	29500
1600	7800	15500	22500	38500
Clamping force	13200 N	26500 N	38000 N	65000 N
Oil pressure	min. 20 bar max. 125 bar	min. 30 bar max. 125 bar	min. 50 bar max. 125 bar	min. 80 bar max. 125 bar
Oil volume	max. 158 cm ³	max. 158 cm ³	max. 158 cm ³	max. 158 cm ³
Weight	71 kg	71 kg	71 kg	71 kg




The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Brake Caliper DU 060 FHM

spring activated – hydraulically released

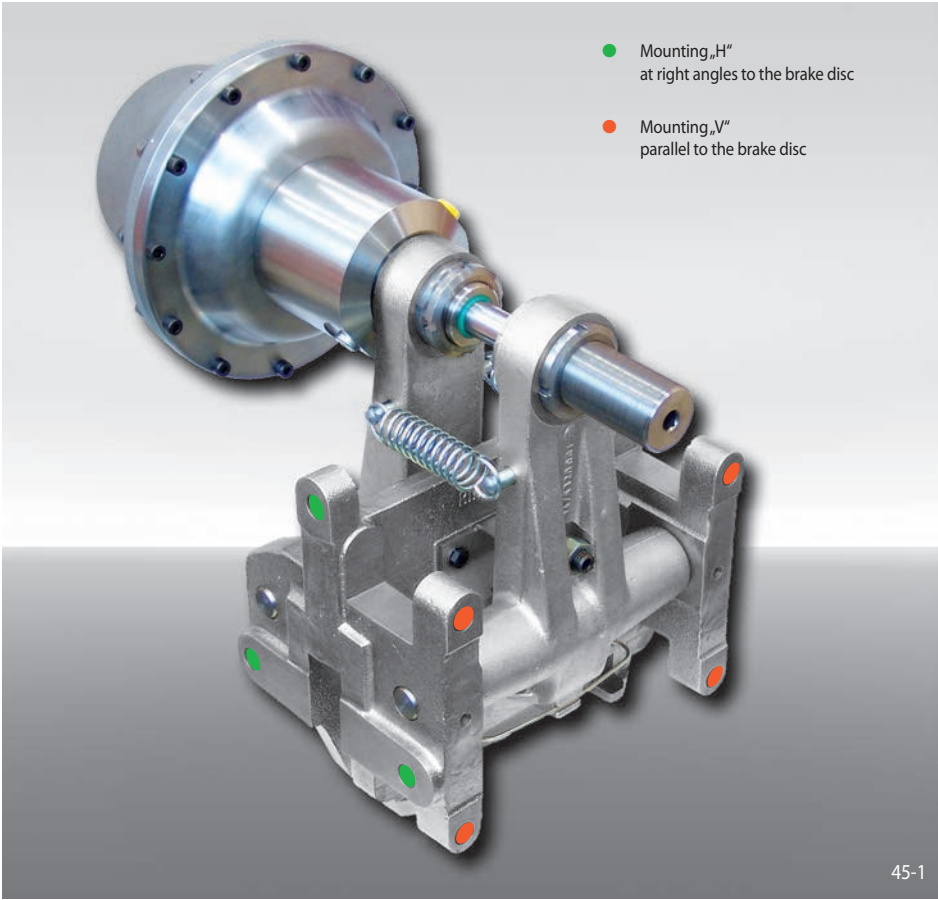


Frame Design

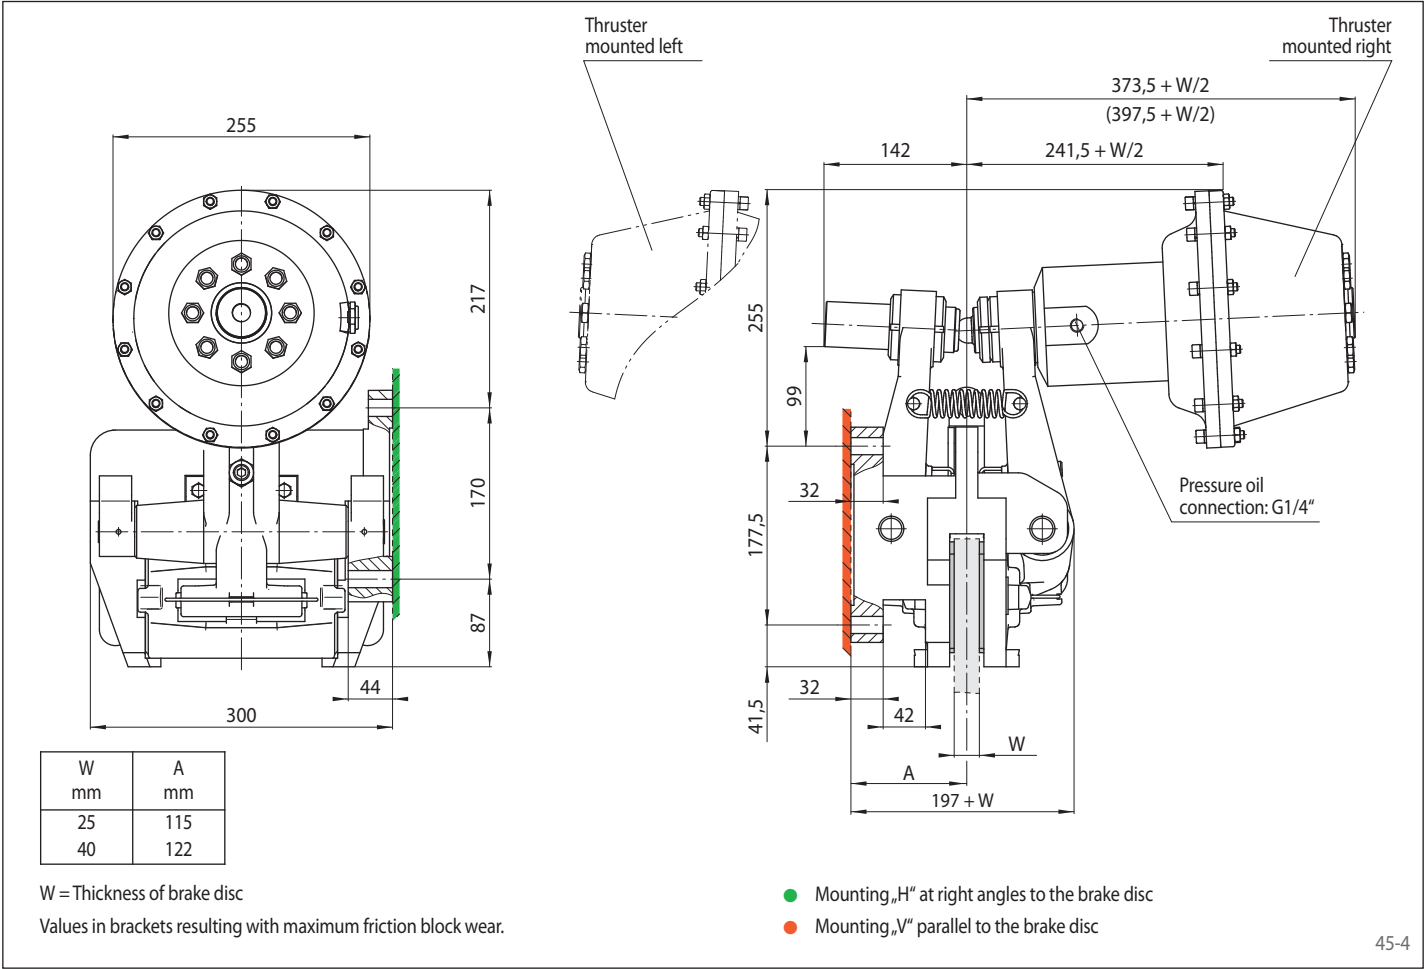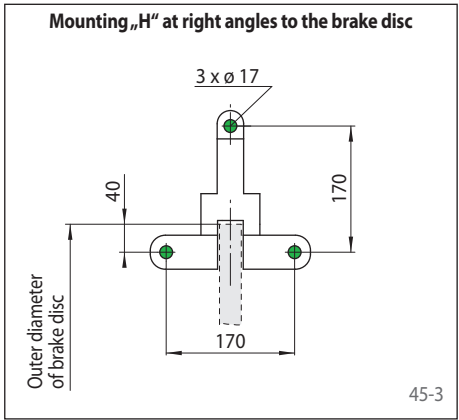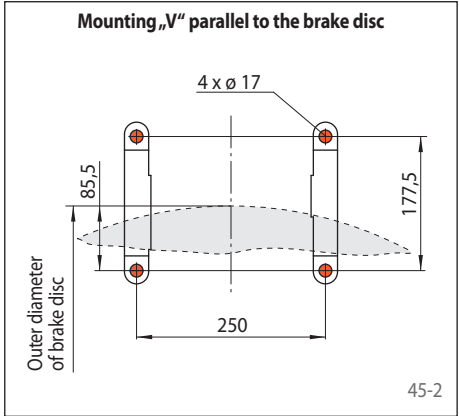

Brake Caliper DH 012 FEM

spring activated – electromagnetically released

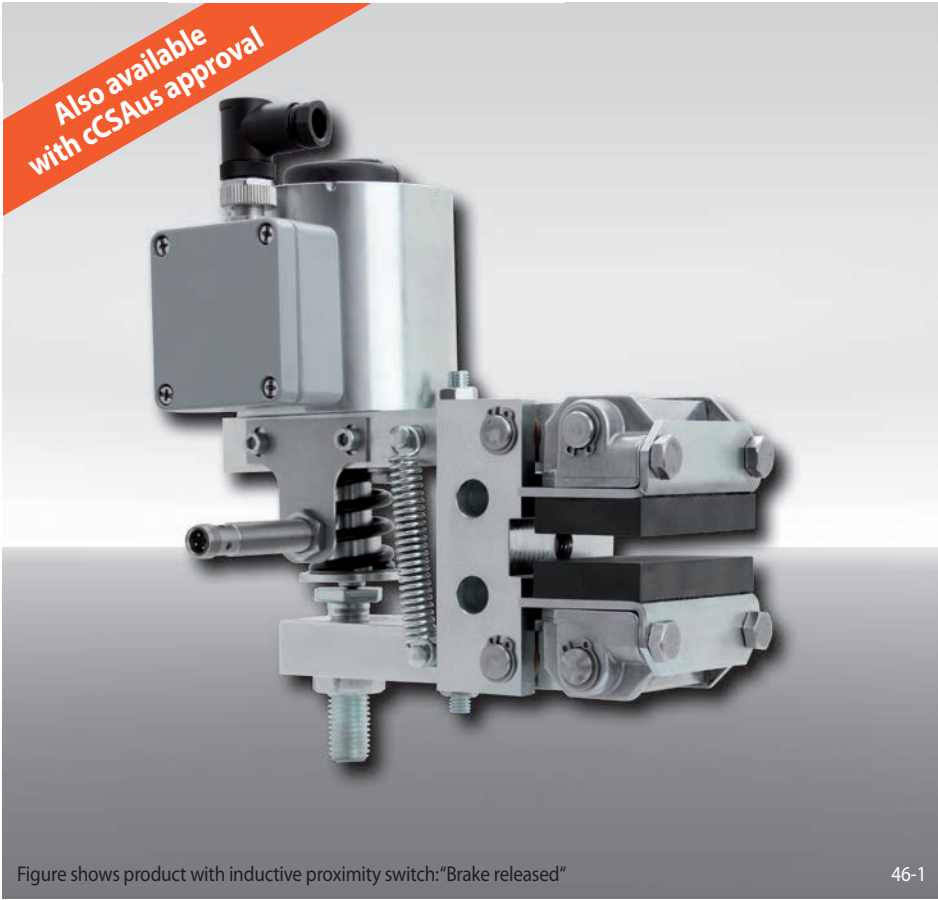


Features	Code
Brake Caliper	D
Mounting to the machine at right angles to the brake disc	H
Frame size 012	012
Spring activated	F
Electromagnetically released	E
Manual adjustment to accommodate friction block wear	M
Electromagnet for 110/120 VAC	440
Electromagnet for 230/240 VAC	450
Thruster mounted right or left available	R L
Thickness of brake disc 12,5 mm	12

Example for ordering

Brake Caliper DH 012 FEM, electromagnet for 110 V, thruster mounted right, thickness of brake disc 12,5 mm:

DH 012 FEM - 440 R - 12

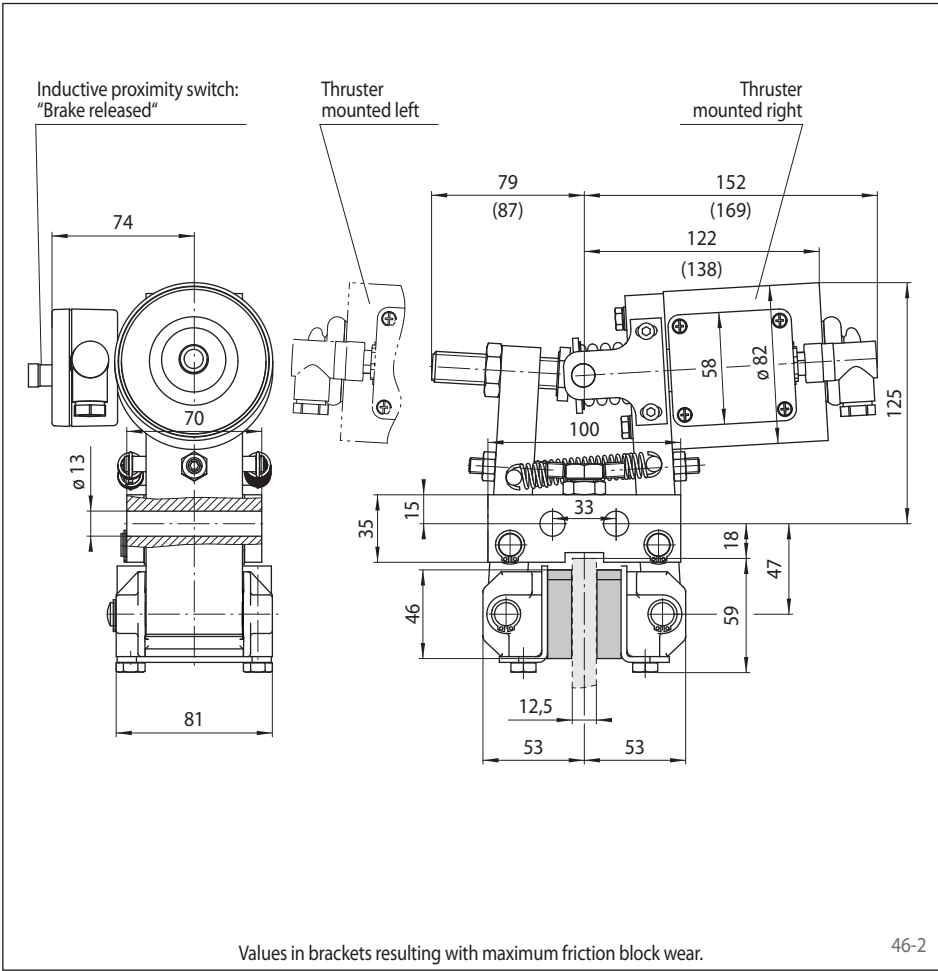

Technical Data

Brake Caliper DH 012 FEM	
	with electro-magnet 440 for 110/120 V
	with electro-magnet 450 for 230/240 V
Brake disc diameter	Braking torque
mm	Nm
200	110
250	140
300	180
355	220
430	280
520	340
Clamping force	1 850 N
Power consumption in open position	10 W (100% duty factor)
Fuse rating	6A
Max. number of actuation	600/h permanent activations at 20° C ambient temperature
Weight	7 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Accessories


Universal Transformer see page 184.

Options

- Available with cCSAus approval
- Inductive proximity switch: "Brake released"

Brake Caliper DV 020 FEM

spring activated – electromagnetically released

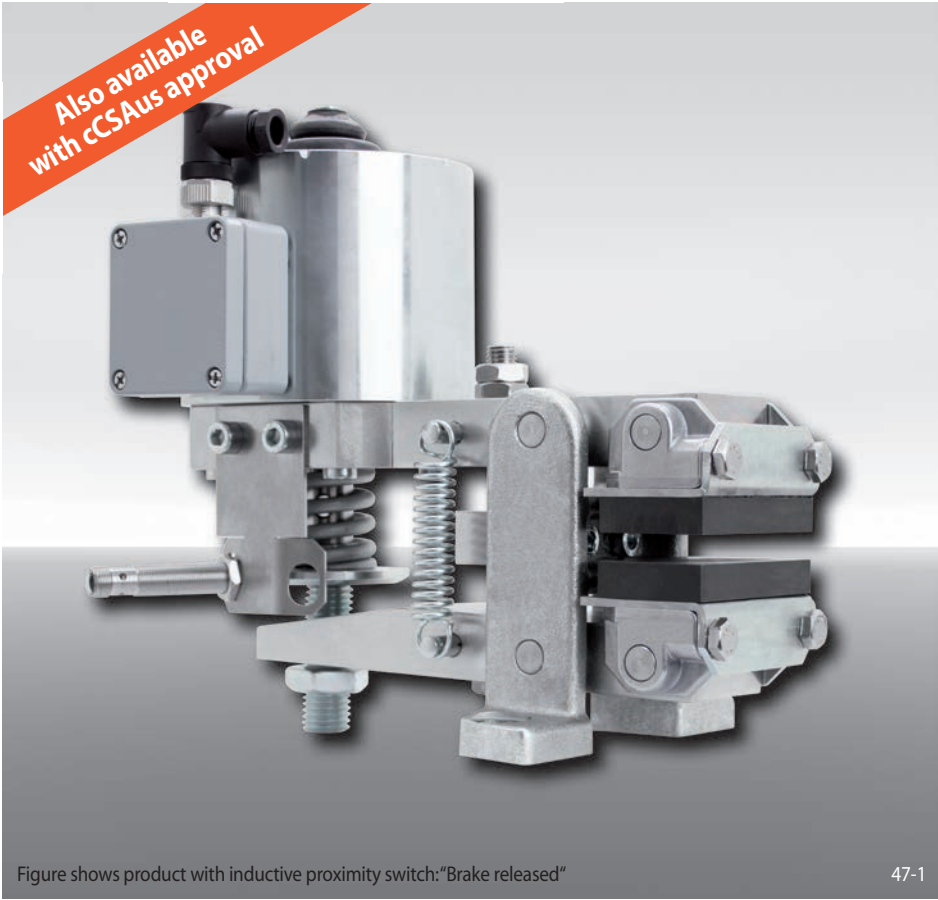

Features	Code
Brake Caliper	D
Mounting to the machine parallel to the brake disc	V
Frame size 020	020
Spring activated	F
Electromagnetically released	E
Manual adjustment to accommodate friction block wear	M
Electromagnet for 230/240 VAC	460
Thruster mounted right or left available	R L
Thickness of brake disc 12,5 mm	12

Example for ordering

Brake Caliper DV 020 FEM, electromagnet for 230 V, thruster mounted right, thickness of brake disc 12,5 mm:

DV 020 FEM - 460 R - 12

Technical Data

Brake Caliper DV 020 FEM with electromagnet 460 for 230/240 V	
Brake disc diameter	Braking torque
mm	Nm
200	190
250	260
300	330
355	400
430	510
520	630
Clamping force	3400 N
Power consumption in open position	12 W (100% duty factor)
Fuse rating	6A
Max. number of actuation	800/h permanent activations at 20° C ambient temperature
Weight	15 kg


The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Accessories

Universal Transformer see page 184.


Options

- Available with cCSAus approval
- Inductive proximity switch: "Brake released"
- Inductive proximity switch: "Brake closed"

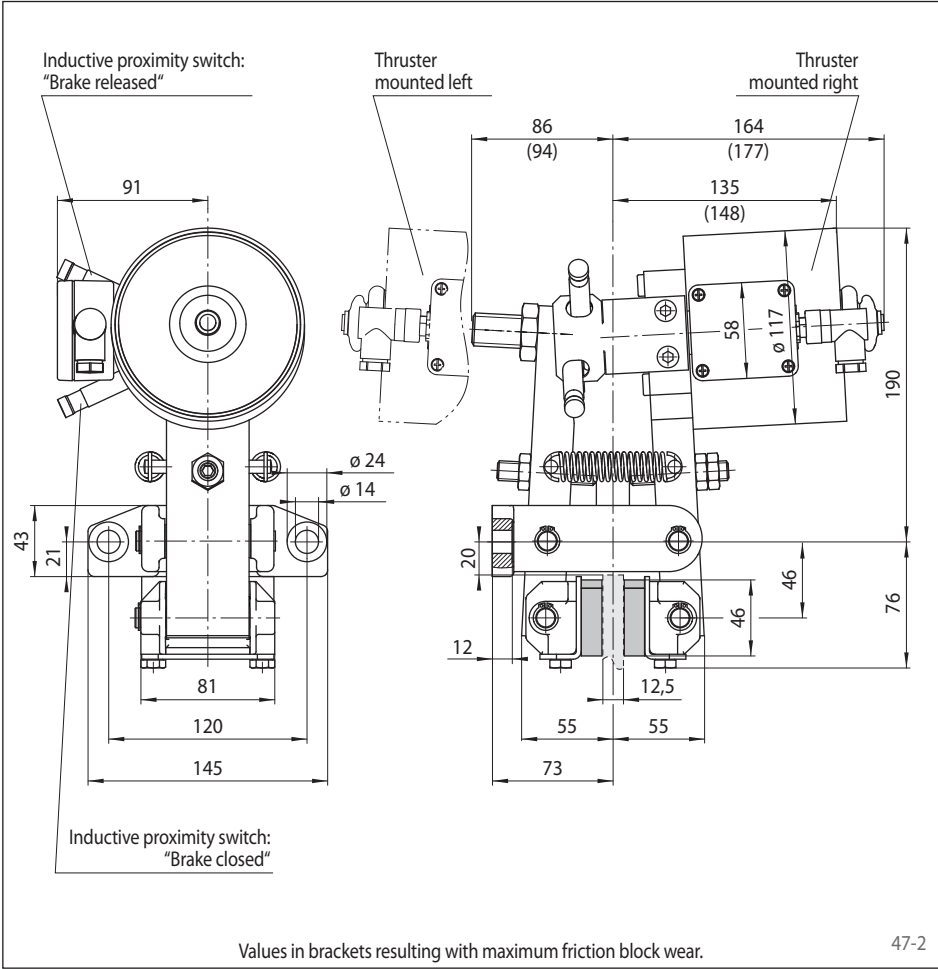

Brake Calipers EV 018 FEM and EH 018 FEM

spring activated – electromagnetically released

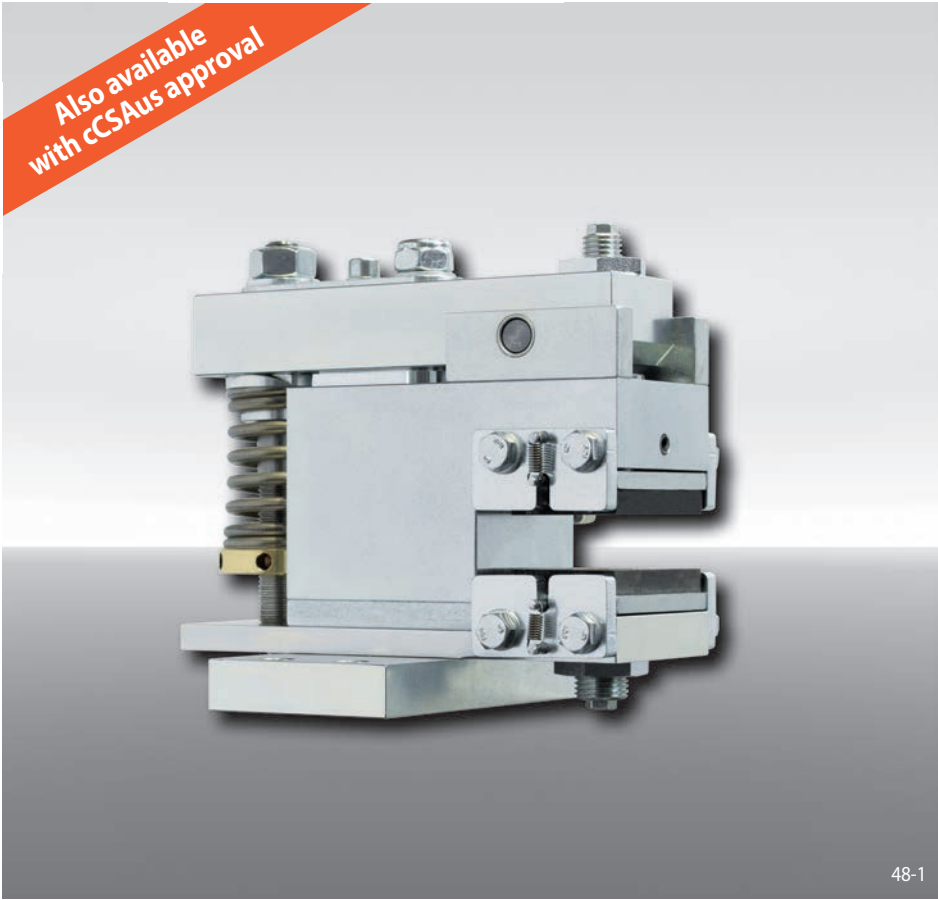

Features	Code
Brake Caliper with electromagnet	E
Mounting to the machine parallel or at right angles to the brake disc	V H
Frame size 018	018
Spring activated	F
Electromagnetically released	E
Manual adjustment to accommodate friction block wear	M
Supply voltage 220 to 240 VAC	240
Supply voltage 380 to 480 VAC	480
Electromagnet mounted in central position	M
Thickness of brake disc 8 ... 15 mm	12
or 16 ... 20 mm	20

Example for ordering

Brake Caliper EV 018 FEM, supply voltage 400 VAC, electromagnet mounted in central position, thickness of brake disc 15 mm:


EV 018 FEM - 480 M - 12

Advantages


The brake caliper EV 018 FEM or EH 018 FEM is a very compact and high efficient disc brake with very low power consumption. Its floating bearing compensates small misalignments of the brake disc. The separate electronic module (included) reduces the power consumption in open position automatically.

Options

- Available with cCSAus approval
- Inductive proximity switch: "Brake released", "Brake closed"-status and/or "Friction block wear adjustment necessary"

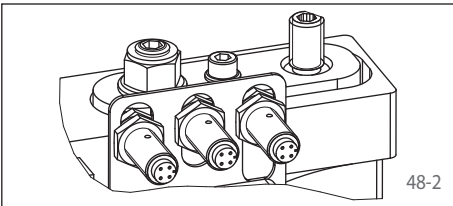

Electronic module

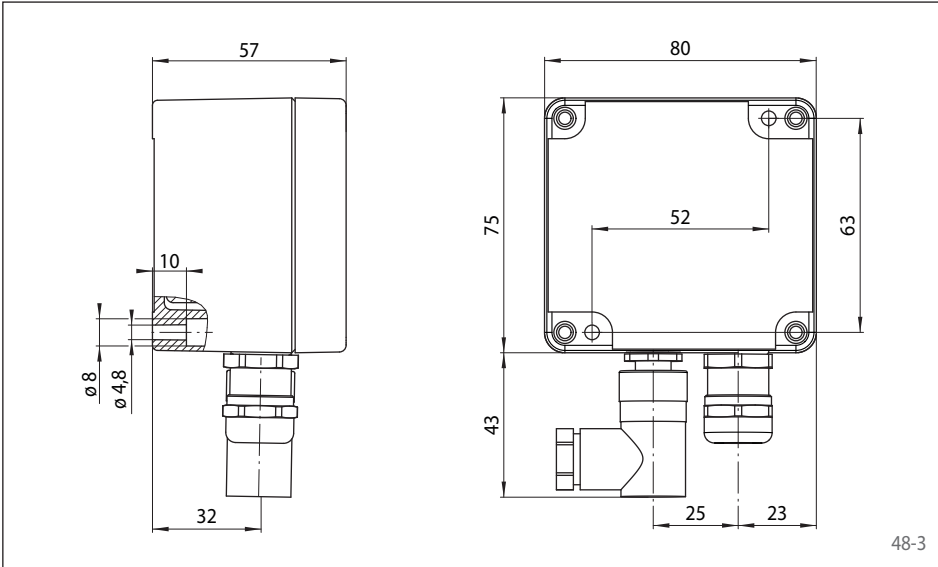

Technical Data


	Brake Calipers EV 018 FEM and EH 018 FEM with supply voltage	
	220 to 240 VAC	380 to 480 VAC
Brake disc diameter	Braking torque	Braking torque
mm	Nm	Nm
125	100	
150	130	
200	200	
250	260	
300	320	
355	400	
Clamping force	3 200 N	
Clamping force or braking torque adjustable	50 - 100%	
Power consumption in open position	24 W	32 W
	(100% duty factor)	
Fuse rating	10 A, Type "B"	
Max. number of actuation	360/h permanent activations at 20° C ambient temperature	
Actuation frequency*	at least 8 seconds between 2 activations	
Weight	6,5 kg	

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.
* Shorter actuation frequency on request


Brake Calipers EV 018 FEM and EH 018 FEM

spring activated – electromagnetically released

Brake Caliper EV 018 FEM

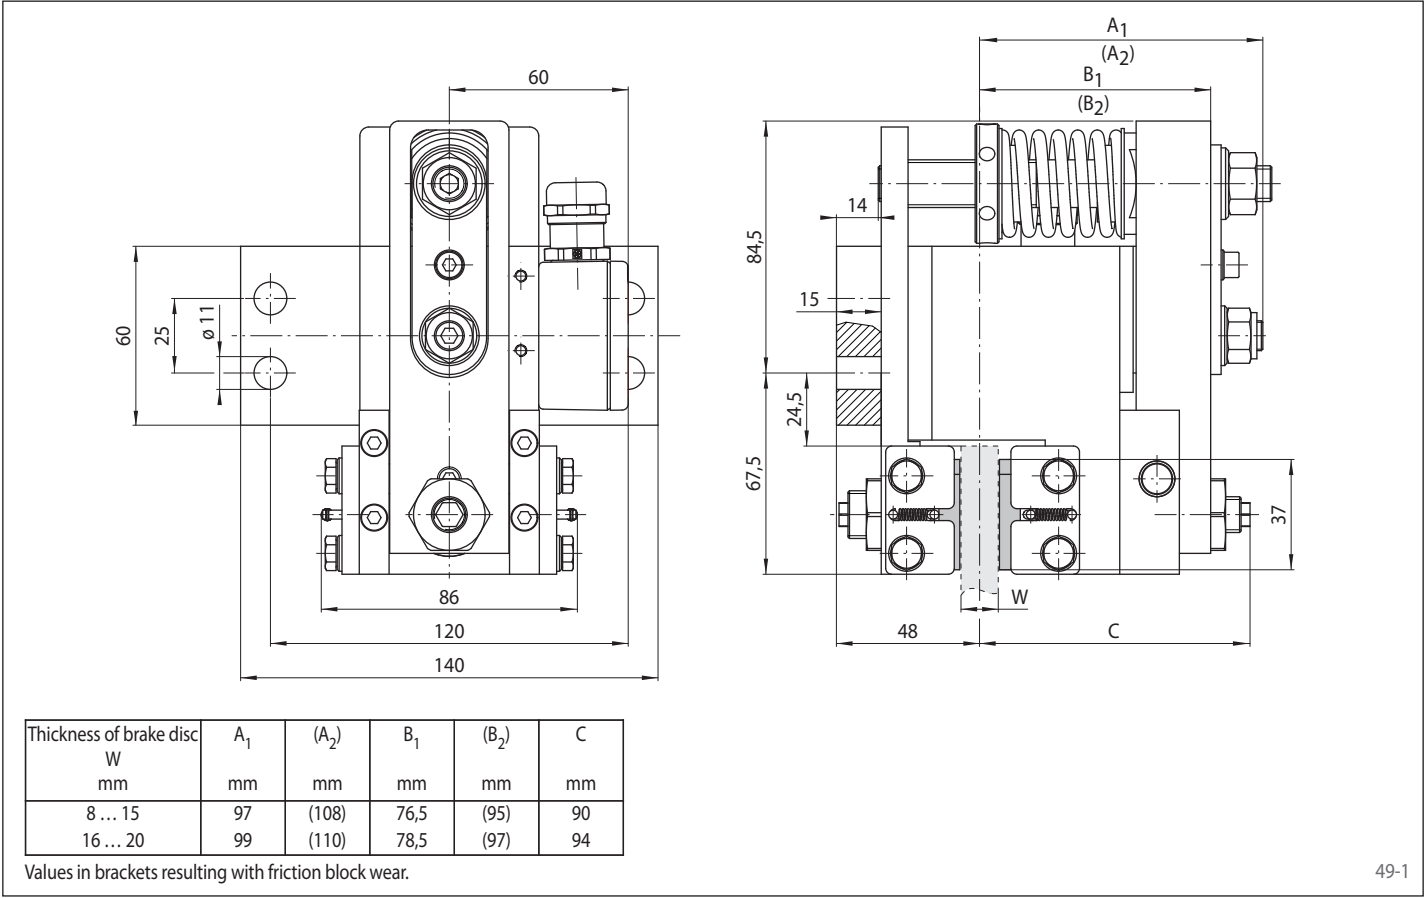


Brake Caliper EH 018 FEM

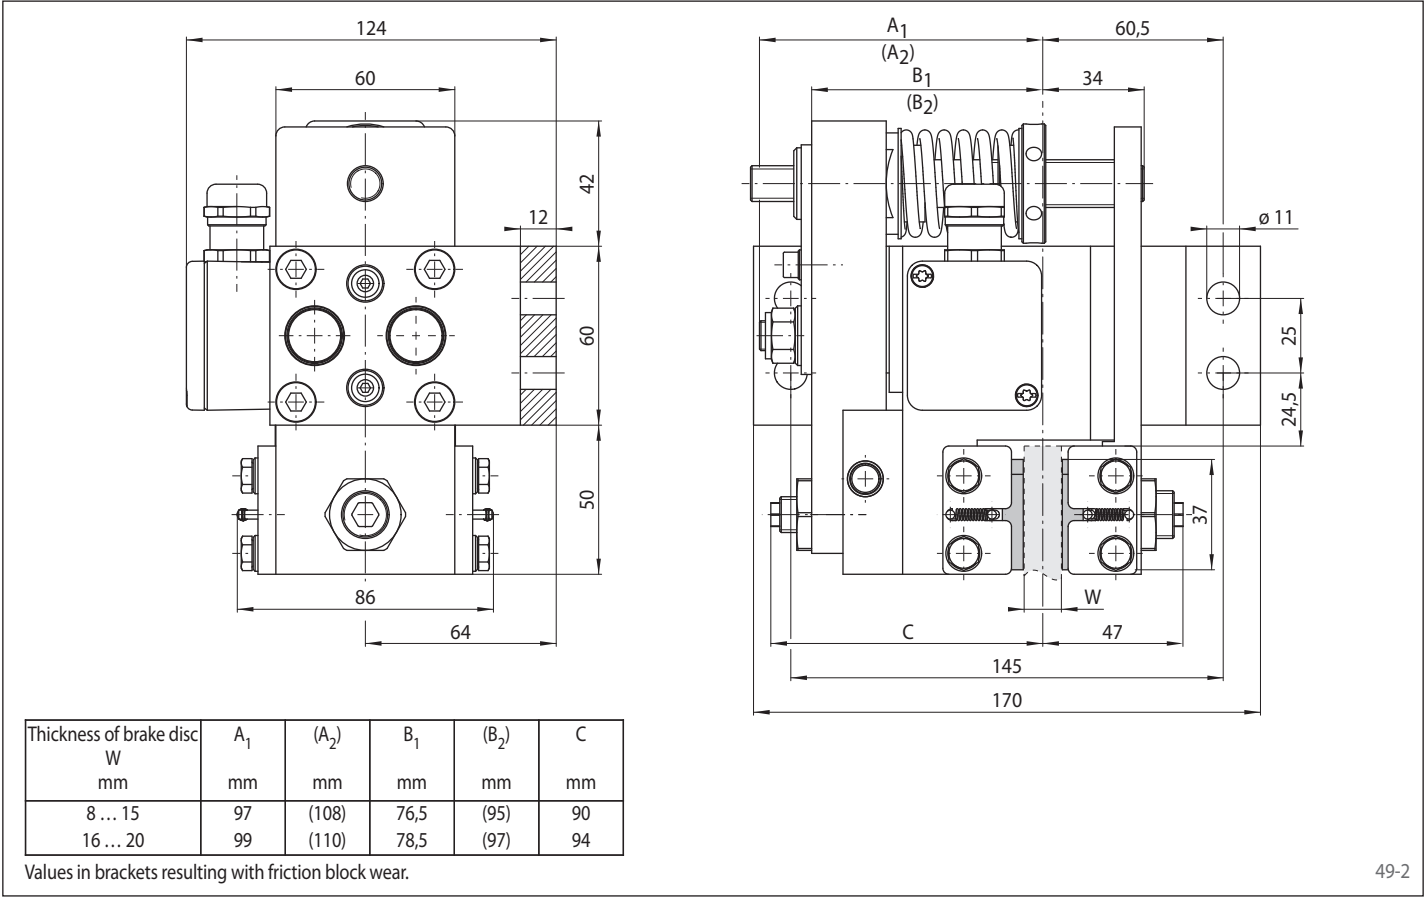

Brake Calipers EV 024 FEM and EH 024 FEM

spring activated – electromagnetically released

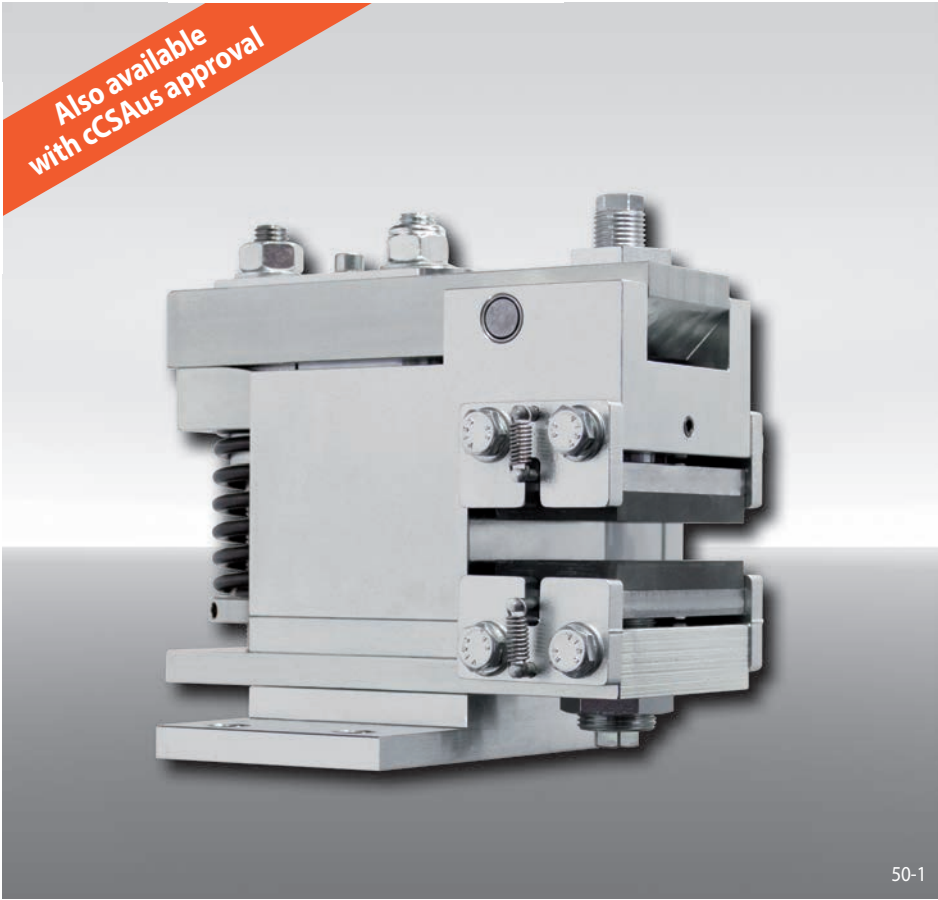

Features	Code
Brake Caliper with electromagnet	E
Mounting to the machine parallel or at right angles to the brake disc	V H
Frame size 024	024
Spring activated	F
Electromagnetically released	E
Manual adjustment to accommodate friction block wear	M
Supply voltage 220 to 240 VAC	240
Supply voltage 380 to 480 VAC	480
Electromagnet mounted in central position	M
Thickness of brake disc 10 ... 16 mm	12
or 18 ... 26 mm	25

Example for ordering

Brake Caliper EV 024 FEM, supply voltage 400 VAC, electromagnet mounted in central position, thickness of brake disc 15 mm:


EV 024 FEM - 480 M - 12

Advantages

The brake caliper EV 024 FEM or EH 024 FEM is a very compact and high efficient disc brake with very low power consumption. Its floating bearing compensates small misalignments of the brake disc. The attached electronic reduces the power consumption in open position automatically.

Options

- Available with cCSAus approval
- Inductive proximity switch: "Brake released", "Brake closed"-status and/or "Friction block wear adjustment necessary"

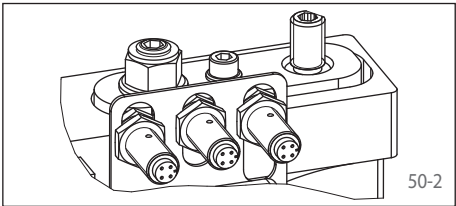

Technical Data

	Brake Calipers EV 024 FEM and EH 024 FEM with supply voltage	
	220 to 240 VAC	380 to 480 VAC
Brake disc diameter	Braking torque	Braking torque
mm	Nm	Nm
250	400	
300	500	
355	610	
430	760	
520	940	
630	1 160	
Clamping force	5 000 N	
Clamping force or braking torque adjustable	50 - 100%	
Power consumption in open position	20 W	20 W (100% duty factor)
Fuse rating	10 A, Type "B"	
Max. number of actuation	360/h permanent activations at 20° C ambient temperature	
Actuation frequency*	at least 8 seconds between 2 activations	
Weight	13 kg	


The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

* Shorter actuation frequency on request


Brake Calipers EV 024 FEM and EH 024 FEM

spring activated – electromagnetically released

Brake Caliper EV 024 FEM

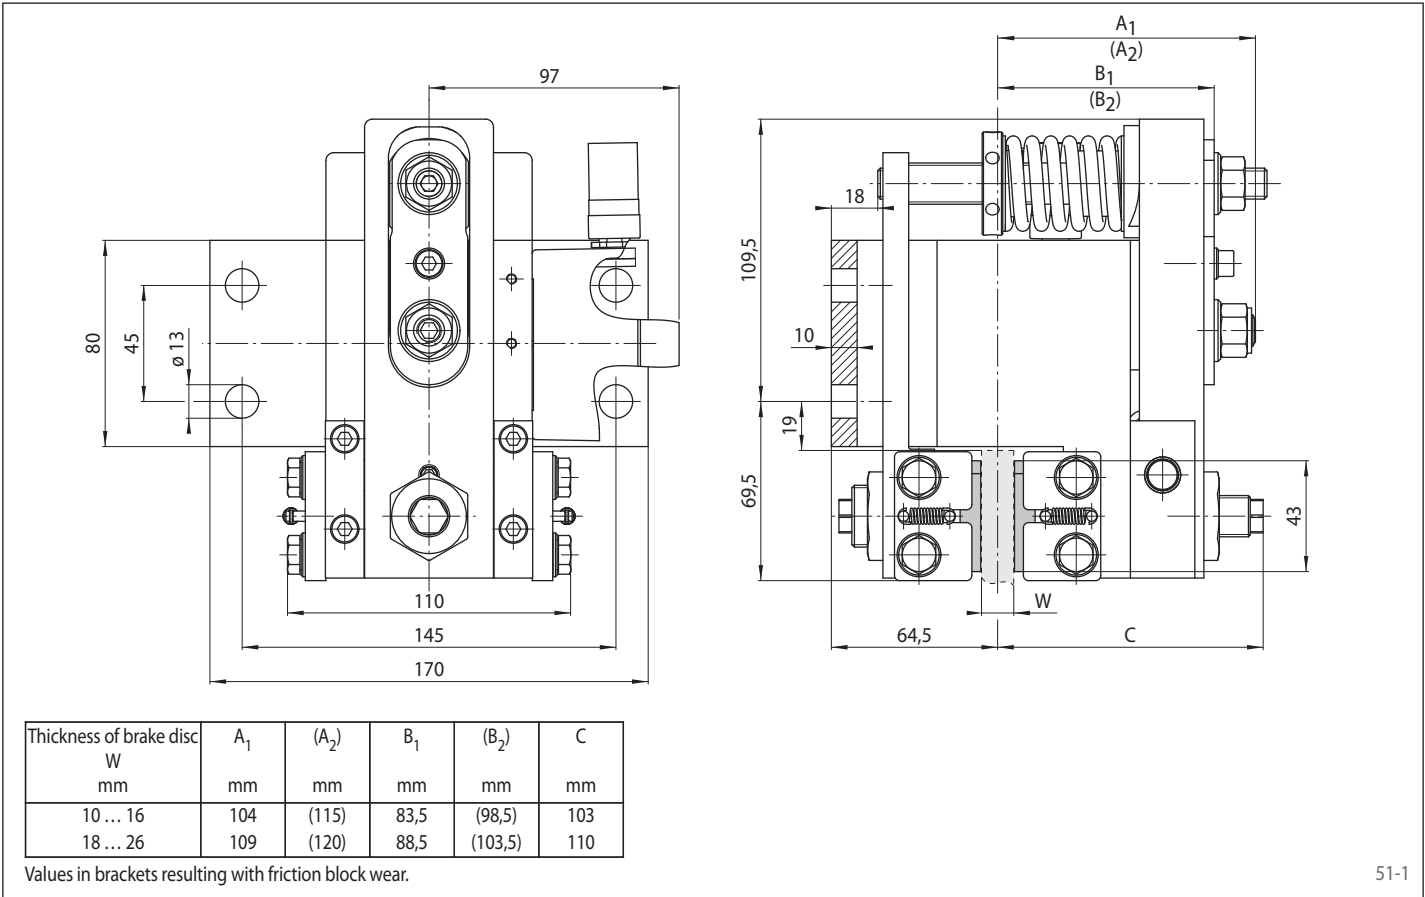


Brake Caliper EH 024 FEM

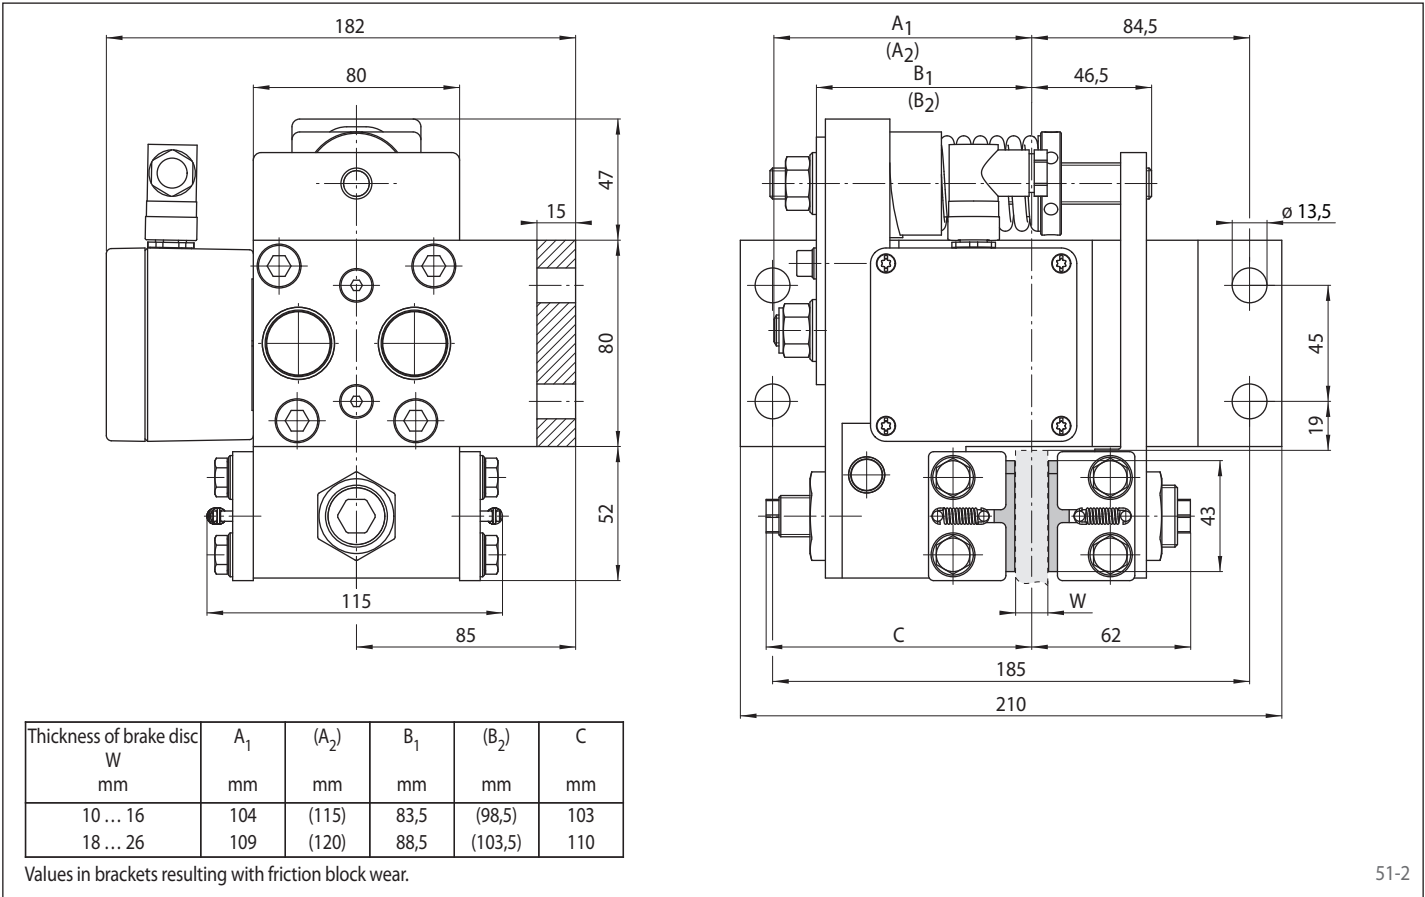

Brake Calipers EV 028 FEM and EH 028 FEM

RINGSPANN®

spring activated – electromagnetically released

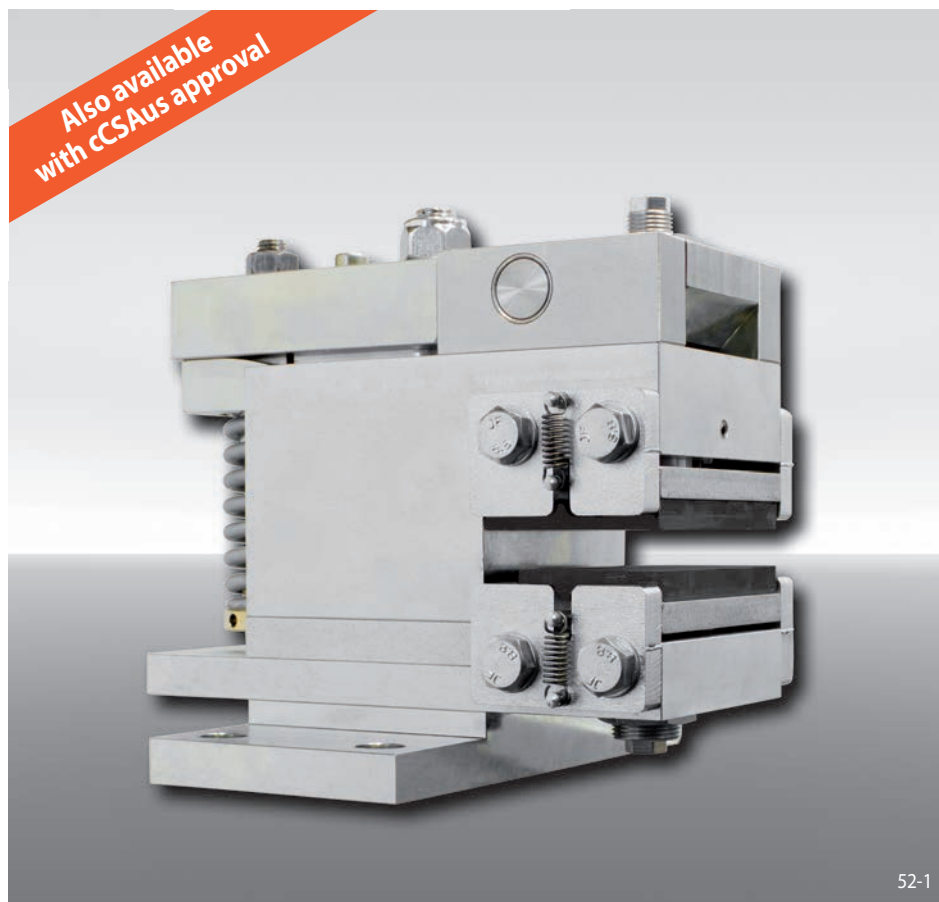

Features

Features	Code
Brake Caliper with electromagnet	E
Mounting to the machine parallel or at right angles to the brake disc	V H
Frame size 028	028
Spring activated	F
Electromagnetically released	E
Manual adjustment to accommodate friction block wear	M
Supply voltage 220 to 240 VAC	240
Supply voltage 380 to 480 VAC	480
Electromagnet mounted in central position	M
Thickness of brake disc 10 ... 16 mm	12
or 18 ... 26 mm	25

Example for ordering

Brake Caliper EV 028 FEM, supply voltage 400 VAC, electromagnet mounted in central position, thickness of brake disc 15 mm:


EV 028 FEM - 480 M - 12

Advantages

The brake caliper EV 028 FEM or EH 028 FEM is a very compact and high efficient disc brake with very low power consumption. Its floating bearing compensates small misalignments of the brake disc. The attached electronic reduces the power consumption in open position automatically.

Options

- Available with cCSAus approval
- Inductive proximity switch: "Brake released", "Brake closed"-status and/or "Friction block wear adjustment necessary"

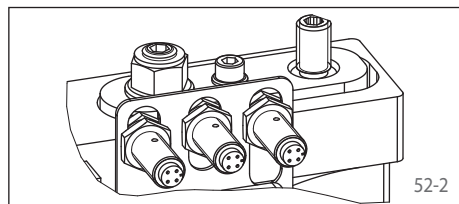


Technical Data

	Brake Calipers EV 028 FEM and EH 028 FEM with supply voltage	
	220 to 240 VAC	380 to 480 VAC
Brake disc diameter	Braking torque	Braking torque
mm	Nm	Nm
300	940	
355	1 160	
430	1 460	
520	1 820	
630	2 260	
710	2 580	
Clamping force	10 000 N	
Clamping force or braking torque adjustable	60 - 100%	
Power consumption in open position	15 W	19 W (100% duty factor)
Fuse rating	10 A, Type "B"	
Max. number of actuation	360/h permanent activations at 20° C ambient temperature	
Actuation frequency*	at least 8 seconds between 2 activations	
Weight	24 kg	


The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

* Shorter actuation frequency on request

Brake Caliper EV 028 FEM

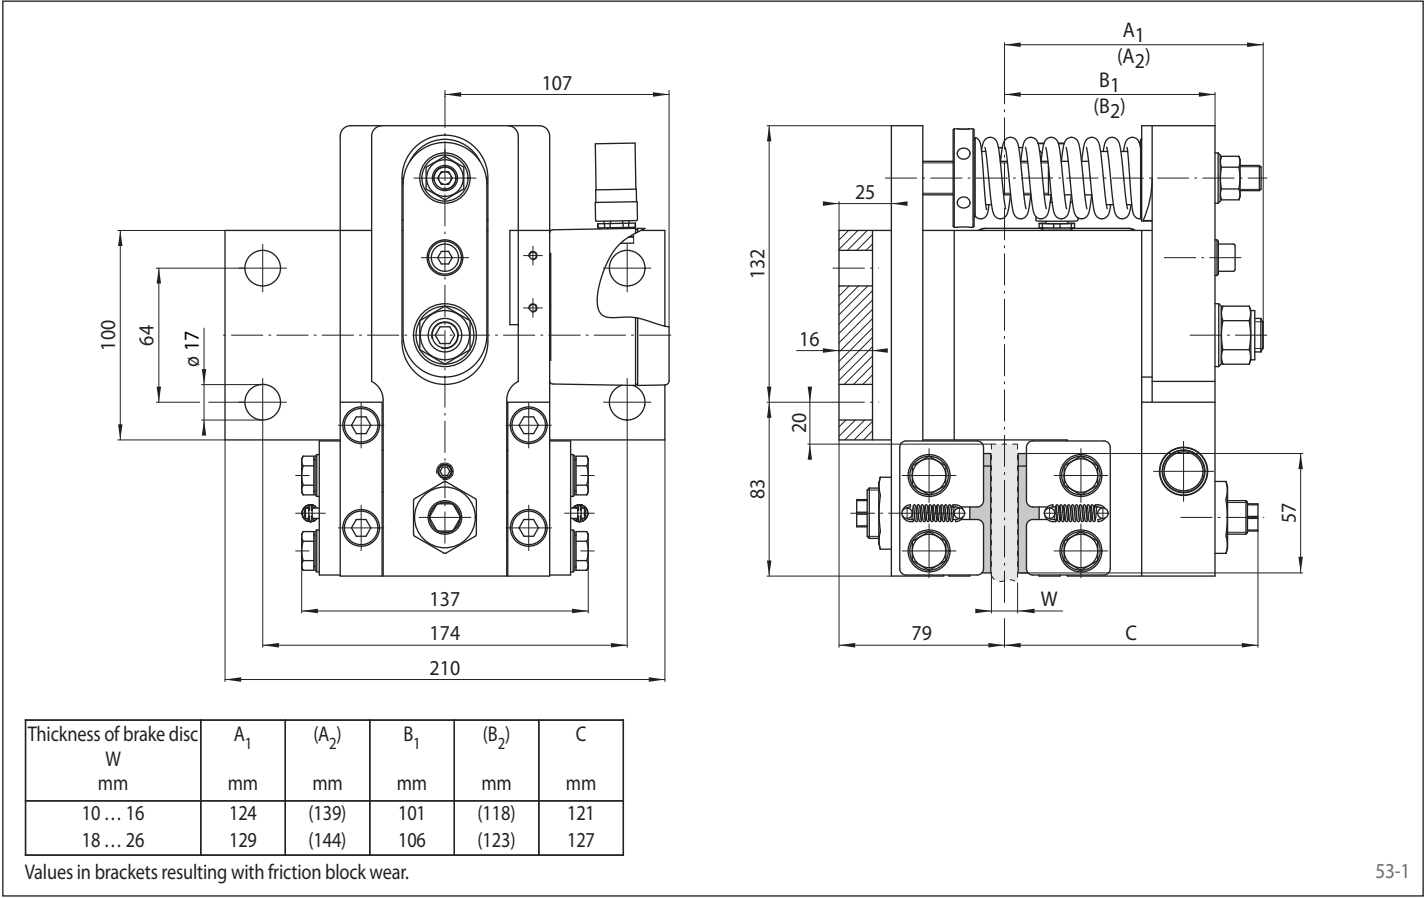


Brake Caliper EH 028 FEM

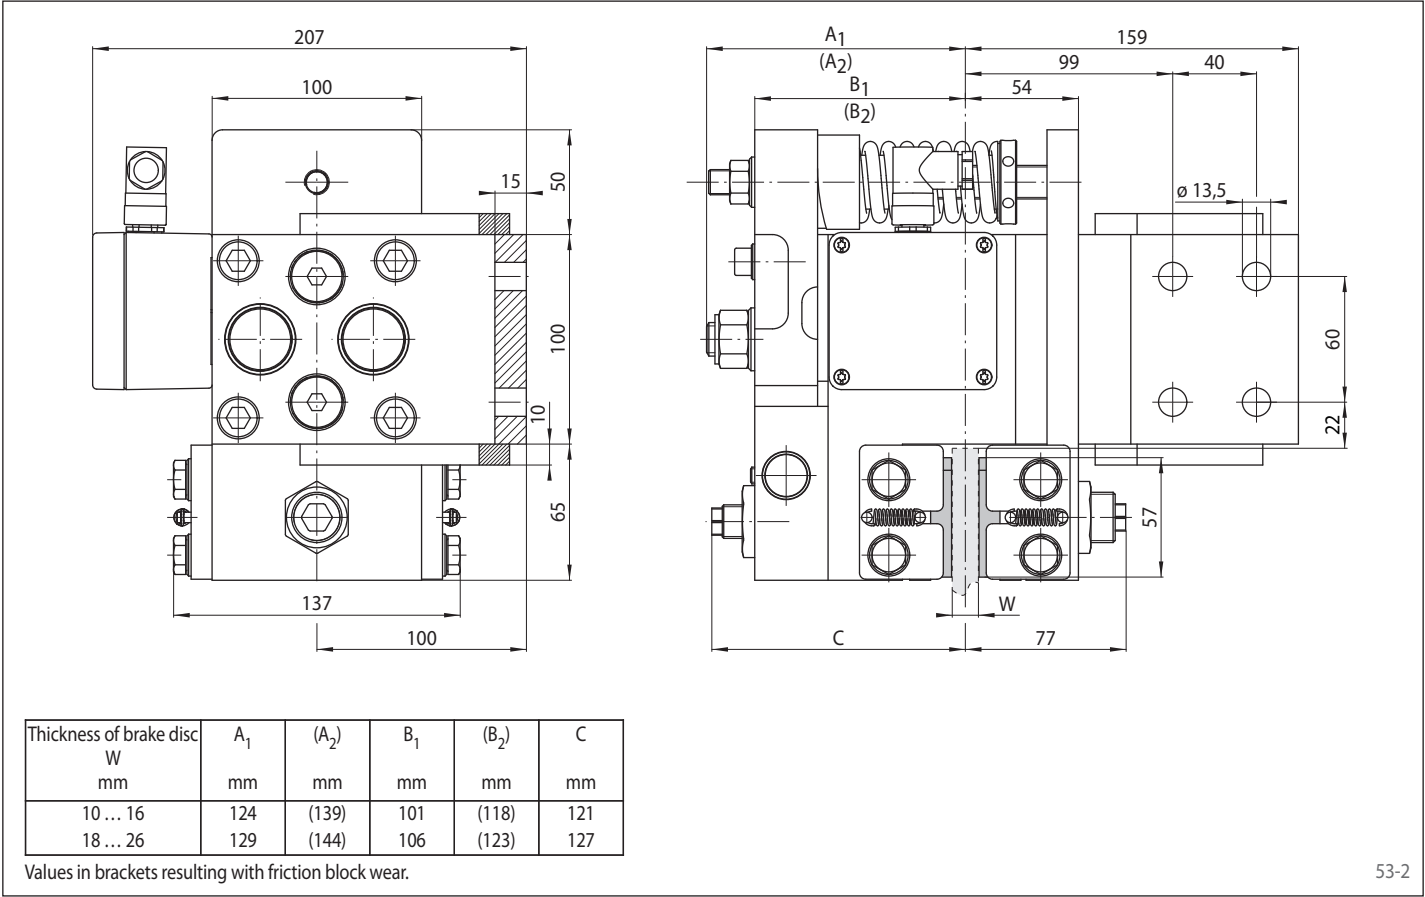

Brake Calipers EV 038 FEM and EH 038 FEM

spring activated – electromagnetically released

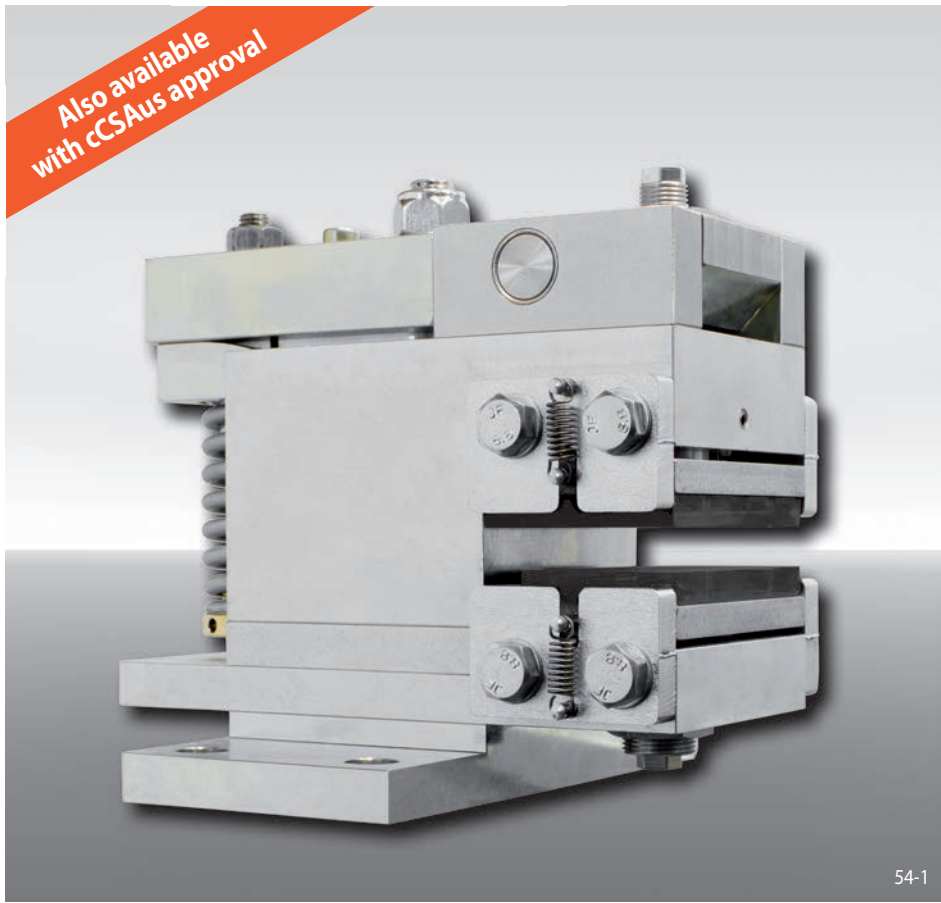

Features	Code
Brake Caliper with electromagnet	E
Mounting to the machine parallel or at right angles to the brake disc	V H
Frame size 038	038
Spring activated	F
Electromagnetically released	E
Manual adjustment to accommodate friction block wear	M
Supply voltage 220 to 240 VAC	240
Supply voltage 380 to 480 VAC	480
Electromagnet mounted in central position	M
Thickness of brake disc 12,5 ... 20 mm	12
or 22 ... 30 mm	25

Example for ordering

Brake Caliper EV 038 FEM, supply voltage 400 VAC, electromagnet mounted in central position, thickness of brake disc 25 mm:


EV 038 FEM - 480 M - 25

Advantages

The brake caliper EV 038 FEM or EH 038 FEM is a very compact and high efficient disc brake with very low power consumption. Its floating bearing compensates small misalignments of the brake disc. The attached electronic reduces the power consumption in open position automatically.

Options

- Available with cCSAus approval
- Inductive proximity switch: "Brake released", "Brake closed"-status and/or "Friction block wear adjustment necessary"

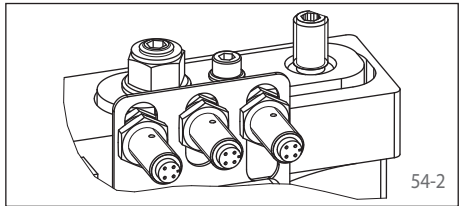

Technical Data

	Brake Calipers EV 038 FEM and EH 038 FEM with supply voltage	
	220 to 240 VAC	380 to 480 VAC
Brake disc diameter	Braking torque	Braking torque
mm	Nm	Nm
430	2830	
520	3550	
630	4430	
710	5070	
800	5790	
900	6590	
Clamping force	20 000 N	
Clamping force or braking torque adjustable	60 - 100%	
Power consumption in open position	20 W	24 W (100% duty factor)
Fuse rating	10 A, Type "B"	
Max. number of actuation	360/h permanent activations at 20° C ambient temperature	
Actuation frequency*	at least 8 seconds between 2 activations	
Weight	50 kg	


The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

* Shorter actuation frequency on request


Brake Calipers EV 038 FEM and EH 038 FEM

spring activated – electromagnetically released

Brake Caliper EV 038 FEM

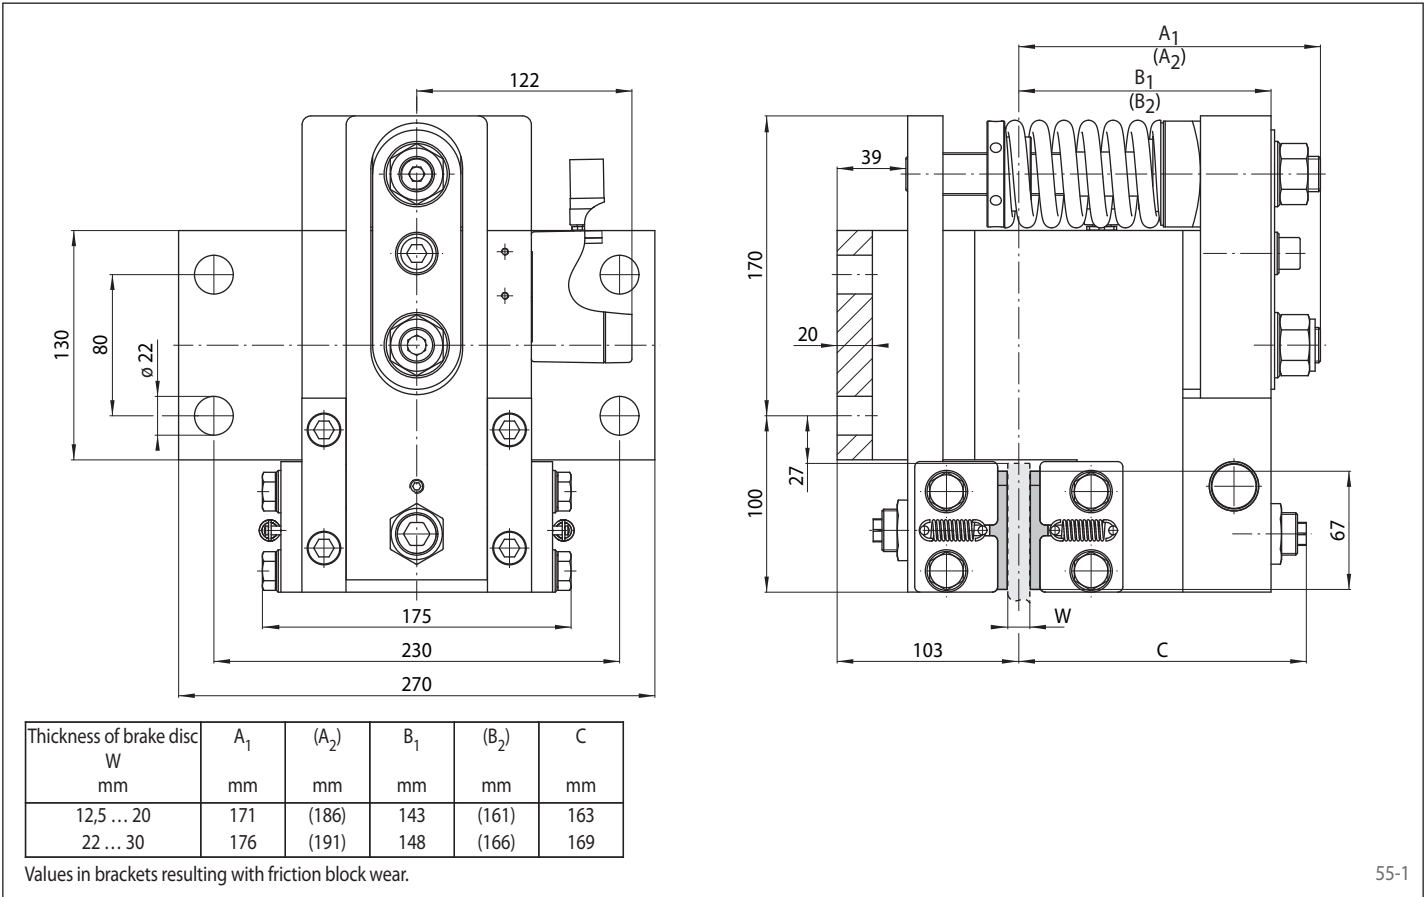


Brake Caliper EH 038 FEM

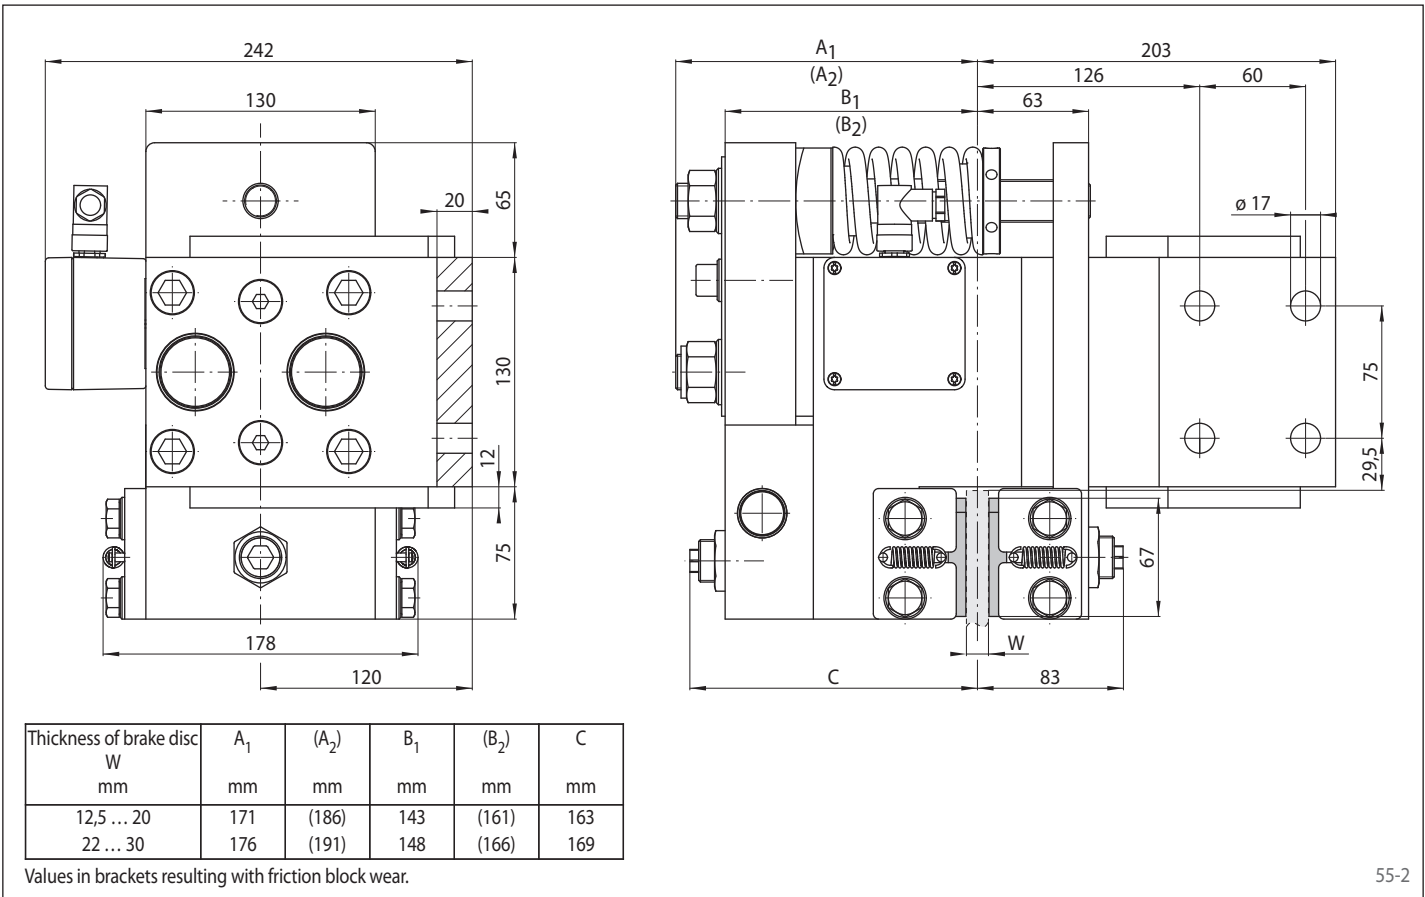

Brake Caliper DS 160 FEA

spring activated – electrohydraulically released

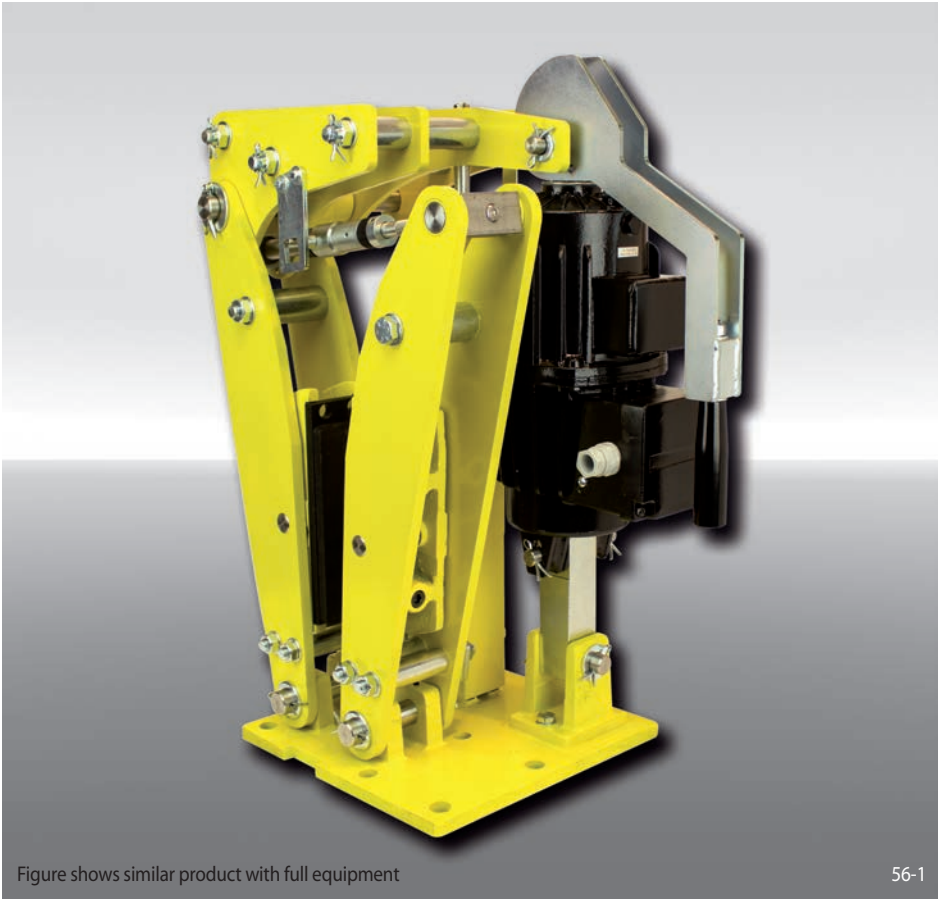

Features	Code
Brake Caliper	D
Disc Brake	S
Frame size 160	160
Spring activated	F
Electrohydraulically released	E
Automatic adjustment to accommodate friction block wear	A
Thrustors 451 or 452 are available	451 452
Thrustors mounted right or left available	R L
Thickness of brake disc 20 mm	20

Example for ordering

Brake Caliper DS 160 FEA, thrustor 452, thrustor mounted right, thickness of brake disc 20 mm:

DS 160 FEA - 452 R - 20

Technical Data

	Brake Caliper DS 160 FEA	
	with thrustor 451	with thrustor 452
Brake disc diameter	Braking torque	Braking torque
mm	Nm	Nm
250	200	270
315	260	350
355	300	400
400	340	460
450	390	530
500	440	600
Clamping force	2500 N	3400 N
Braking torque adjustable	20 - 100%	20 - 100%
Nominal power	130 W	180 W
Oil volume	1,4 l	2,5 l
Voltage	230/400 V	230/400 V
Weight	40 kg	45 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

RINGSPANN®


Options

- Micro-switch wear control
- Micro-switch status control
- Micro-switch residual piston stroke warning
- Hand release lever
- Hand release lever with padlock
- Thrustor with internal throttle valve
- Thrustor in heat resistant design
- Corrosion protected design
- Friction lining of sintered metall
- Pneumatic cylinder instead of thrustor
- Thrustor also available in other voltages and frequencies

Brake disc diameter D2 mm	D1 mm	D3 mm	E mm
250	196	110	98
315	260	170	130
355	300	210	150
400	346	255	173
450	396	305	198
500	446	355	223


Thruster	B1 mm	M max. mm
451	201	216
452	214	241

Drawing shows the thruster mounted on the right hand side of the brake

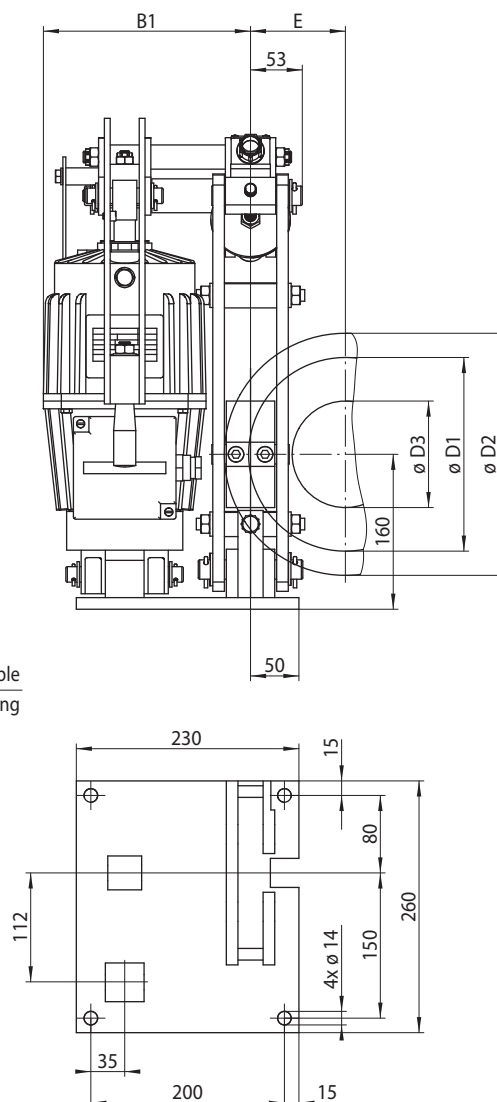

Brake Caliper DS 230 FEM

spring activated – electrohydraulically released

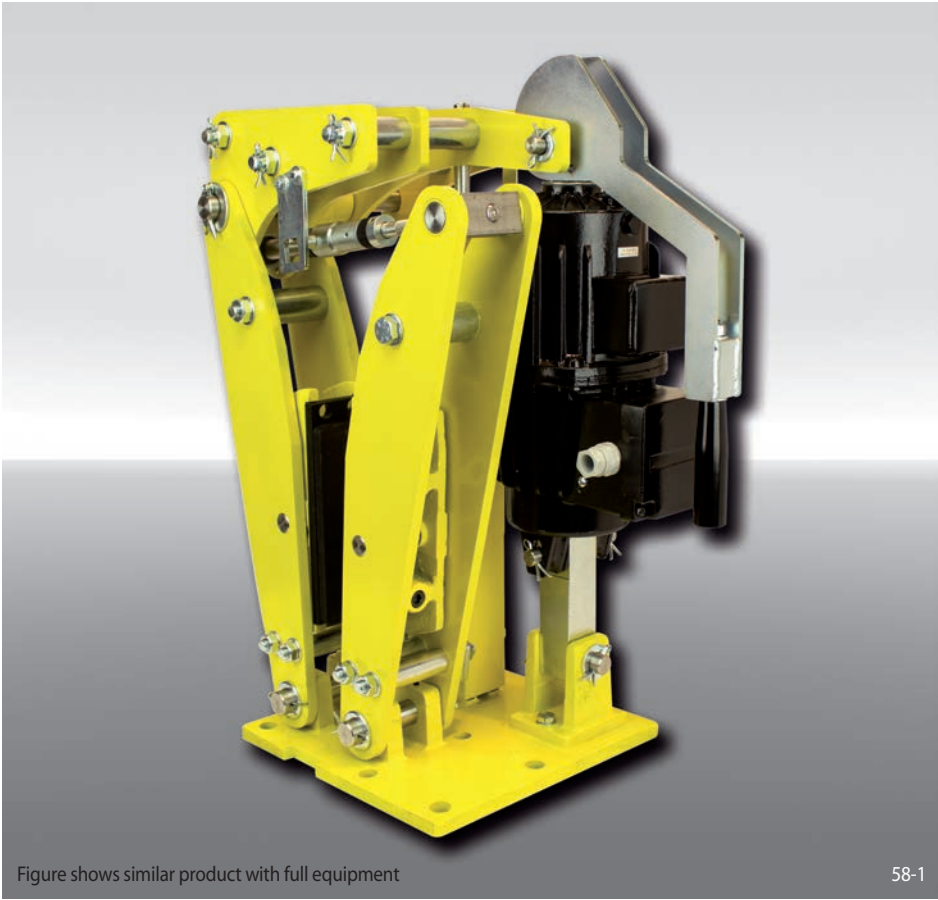

Features	Code
Brake Caliper	D
Disc Brake	S
Frame size 230	230
Spring activated	F
Electrohydraulically released	E
Manual adjustment to accommodate friction block wear	M
Thrustors 451, 452, 453 or 454 are available	451 to 454
Thrustors mounted right or left available	R L
Thickness of brake disc 30 mm	30

Example for ordering

Brake Caliper DS 230 FEM, thrustor 453, thrustor mounted right, thickness of brake disc 30 mm:


DS 230 FEM - 453 R - 30

Technical Data

	Brake Caliper DS 230 FEM			
	with thrustor 451	with thrustor 452	with thrustor 453	with thrustor 454
Brake disc diameter	Braking torque	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm	Nm
315	250	350	750	900
355	300	450	900	1 050
400	350	500	1 050	1 200
450	400	600	1 200	1 400
500	450	650	1 350	1 600
Clamping force	2 750 N	4 100 N	8 250 N	9 700 N
Braking torque adjustable	20 - 100%	20 - 100%	20 - 100%	20 - 100%
Nominal power	130 W	180 W	240 W	280 W
Oil volume	1,4 l	2,5 l	3,5 l	3,5 l
Voltage	230/400 V	230/400 V	230/400 V	230/400 V
Weight	73 kg	78 kg	80 kg	80 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

spring activated – electrohydraulically released

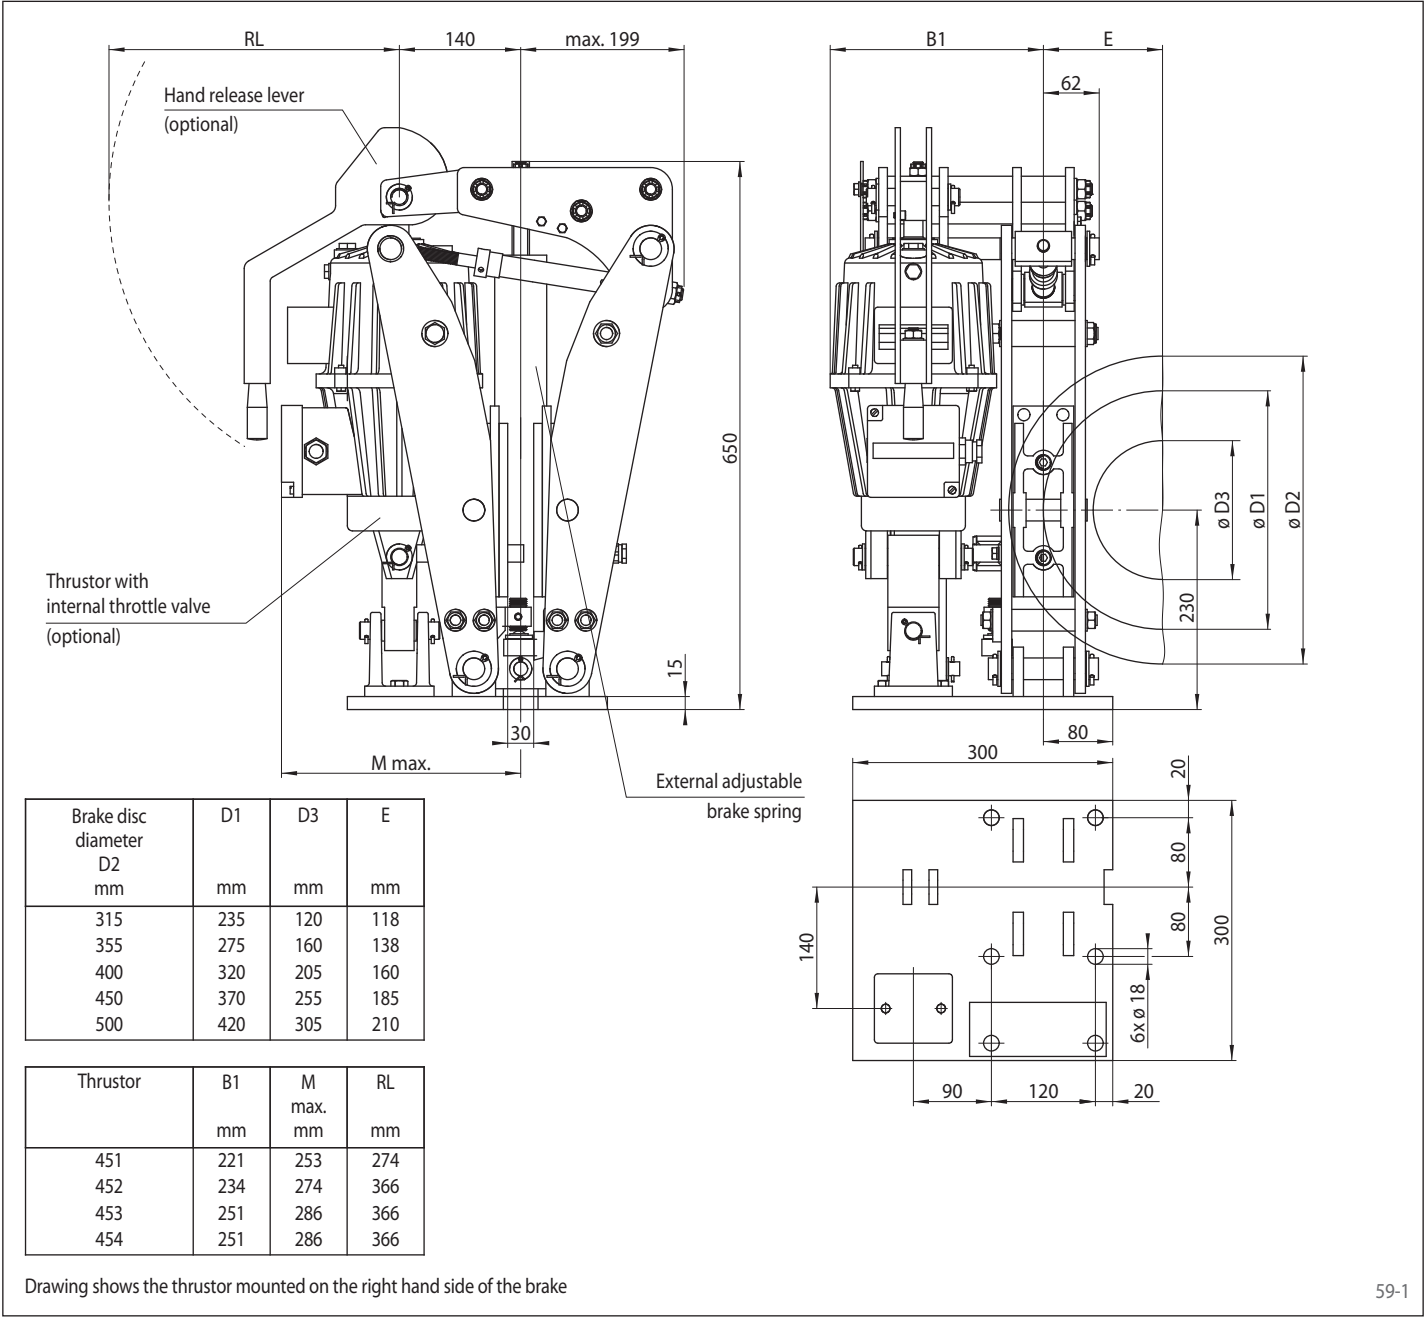

59-1

Options

- Micro-switch wear control
- Micro-switch status control
- Micro-switch residual piston stroke warning
- Hand release lever
- Hand release lever with padlock
- Thrustor with internal throttle valve
- Thrustor in heat resistant design
- Corrosion protected design
- Friction lining of sintered metall
- Pneumatic cylinder instead of thrustor
- Thrustor also available in other voltages and frequencies

Brake Caliper DS 230 FEA

spring activated – electrohydraulically released

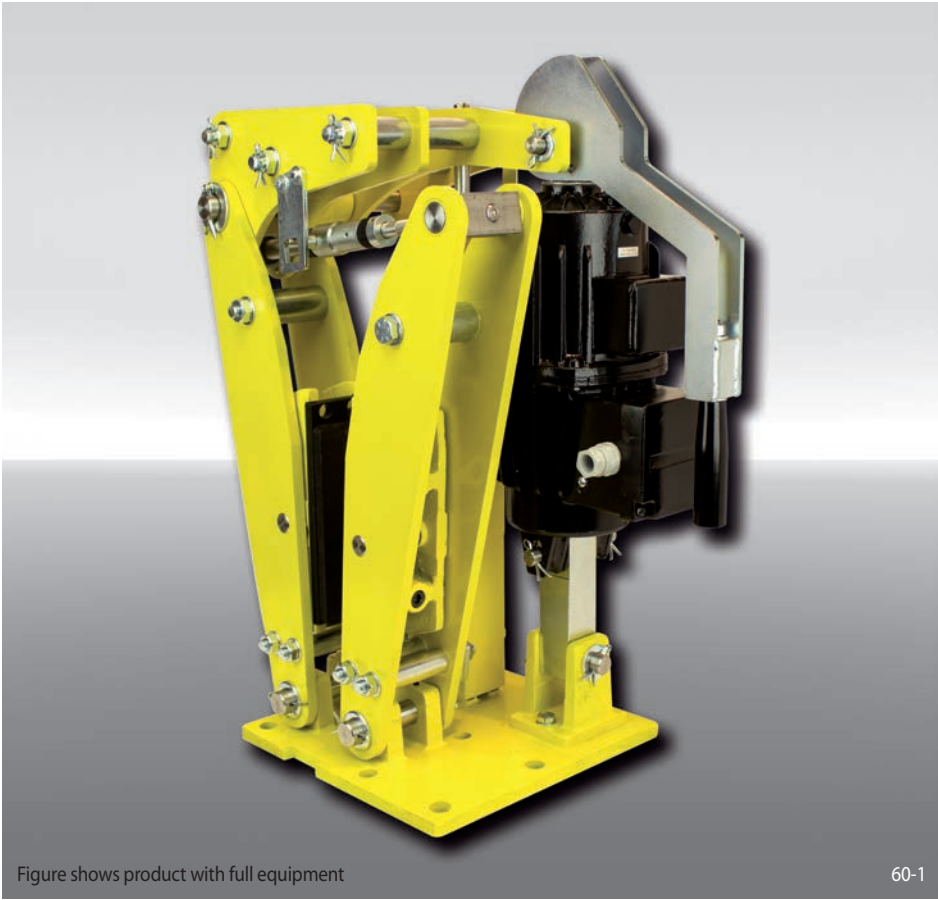


Figure shows product with full equipment

60-1

Features	Code
Brake Caliper	D
Disc Brake	S
Frame size 230	230
Spring activated	F
Electrohydraulically released	E
Automatic adjustment to accommodate friction block wear	A
Thrustors 451, 452, 453 or 454 are available	451 to 454
Thrustors mounted right or left available	R L
Thickness of brake disc 30 mm	30

Example for ordering


Brake Caliper DS 230 FEA, thrustor 453, thrustor mounted right, thickness of brake disc 30 mm:

DS 230 FEA - 453 R - 30

Technical Data

	Brake Caliper DS 230 FEA			
	with thrustor 451	with thrustor 452	with thrustor 453	with thrustor 454
Brake disc diameter	Braking torque	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm	Nm
315	250	350	750	900
355	300	450	900	1 050
400	350	500	1 050	1 200
450	400	600	1 200	1 400
500	450	650	1 350	1 600
Clamping force	2 750 N	4 100 N	8 250 N	9 700 N
Braking torque adjustable	20 - 100%	20 - 100%	20 - 100%	20 - 100%
Nominal power	130 W	180 W	240 W	280 W
Oil volume	1,4 l	2,5 l	3,5 l	3,5 l
Voltage	230/400 V	230/400 V	230/400 V	230/400 V
Weight	73 kg	78 kg	80 kg	80 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

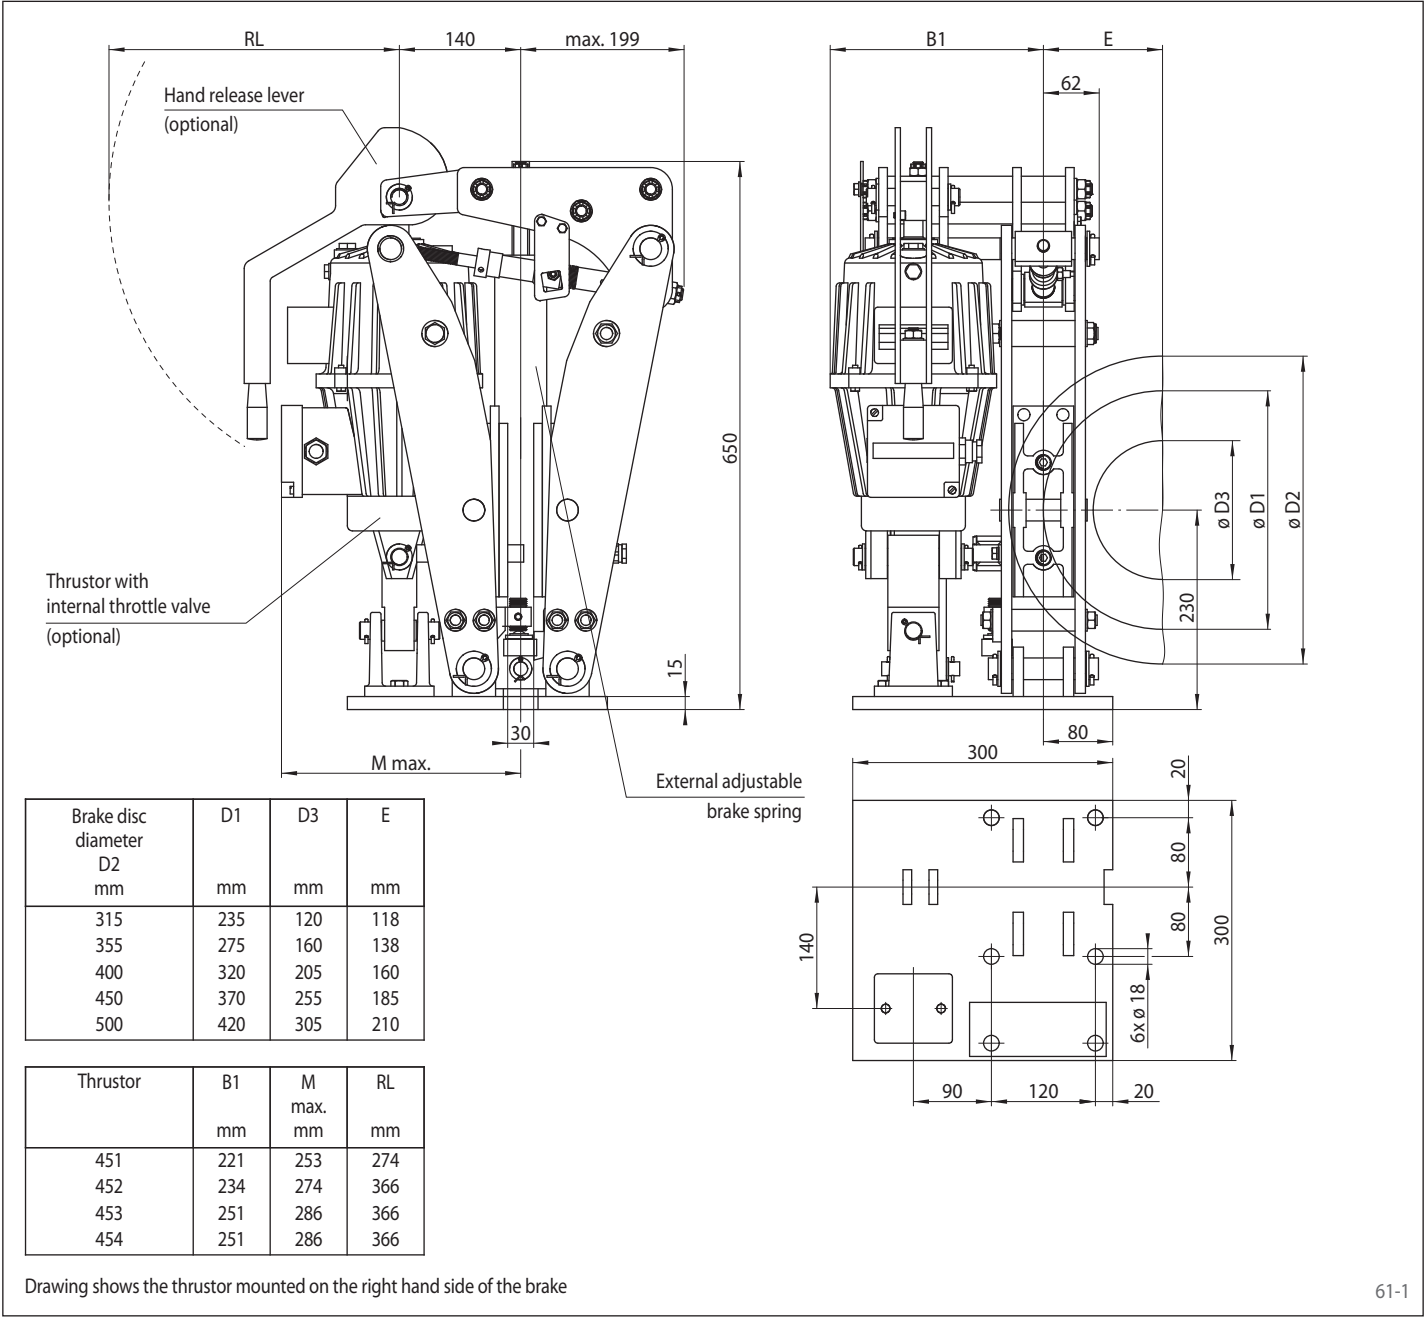


Options

- Micro-switch wear control
- Micro-switch status control
- Micro-switch residual piston stroke warning
- Hand release lever
- Hand release lever with padlock
- Thrustor with internal throttle valve
- Thrustor in heat resistant design
- Corrosion protected design
- Friction lining of sintered metall
- Pneumatic cylinder instead of thrustor
- Thrustor also available in other voltages and frequencies

Brake Caliper DS 280 FEM

spring activated – electrohydraulically released

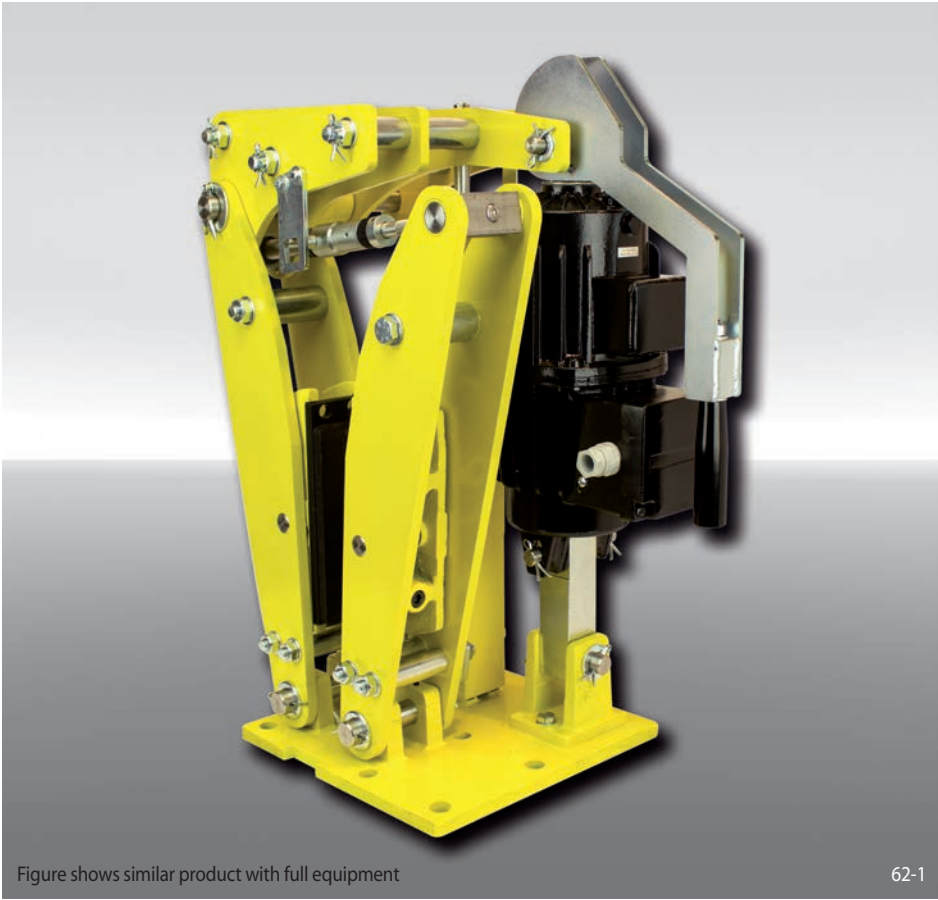

Features	Code
Brake Caliper	D
Disc Brake	S
Frame size 280	280
Spring activated	F
Electrohydraulically released	E
Manual adjustment to accommodate friction block wear	M
Thrustors 453, 454, 455 or 456 are available	453 to 456
Thrustors mounted right or left available	R L
Thickness of brake disc 30 mm	30

Example for ordering

Brake Caliper DS 280 FEM, thrustor 456, thrustor mounted right, thickness of brake disc 30 mm:

DS 280 FEM - 456 R - 30


Technical Data

	Brake Caliper DS 280 FEM			
	with thrustor 453	with thrustor 454	with thrustor 455	with thrustor 456
Brake disc diameter	Braking torque	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm	Nm
400	1 200	1 450	2 400	3 950
450	1 400	1 700	2 800	4 650
500	1 600	1 950	3 200	5 300
560	1 850	2 250	3 650	6 100
630	2 100	2 600	4 250	7 050
710	2 450	3 000	4 850	8 100
Clamping force	10 050 N	12 250 N	20 050 N	33 250 N
Braking torque adjustable	20 - 100%	20 - 100%	20 - 100%	20 - 100%
Nominal power	240 W	280 W	370 W	590 W
Oil volume	3,5 l	3,5 l	4,5 l	11 l
Voltage	230/400 V	230/400 V	230/400 V	230/400 V
Weight	126 kg	126 kg	132 kg	158 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Brake Caliper DS 280 FEM

spring activated – electrohydraulically released

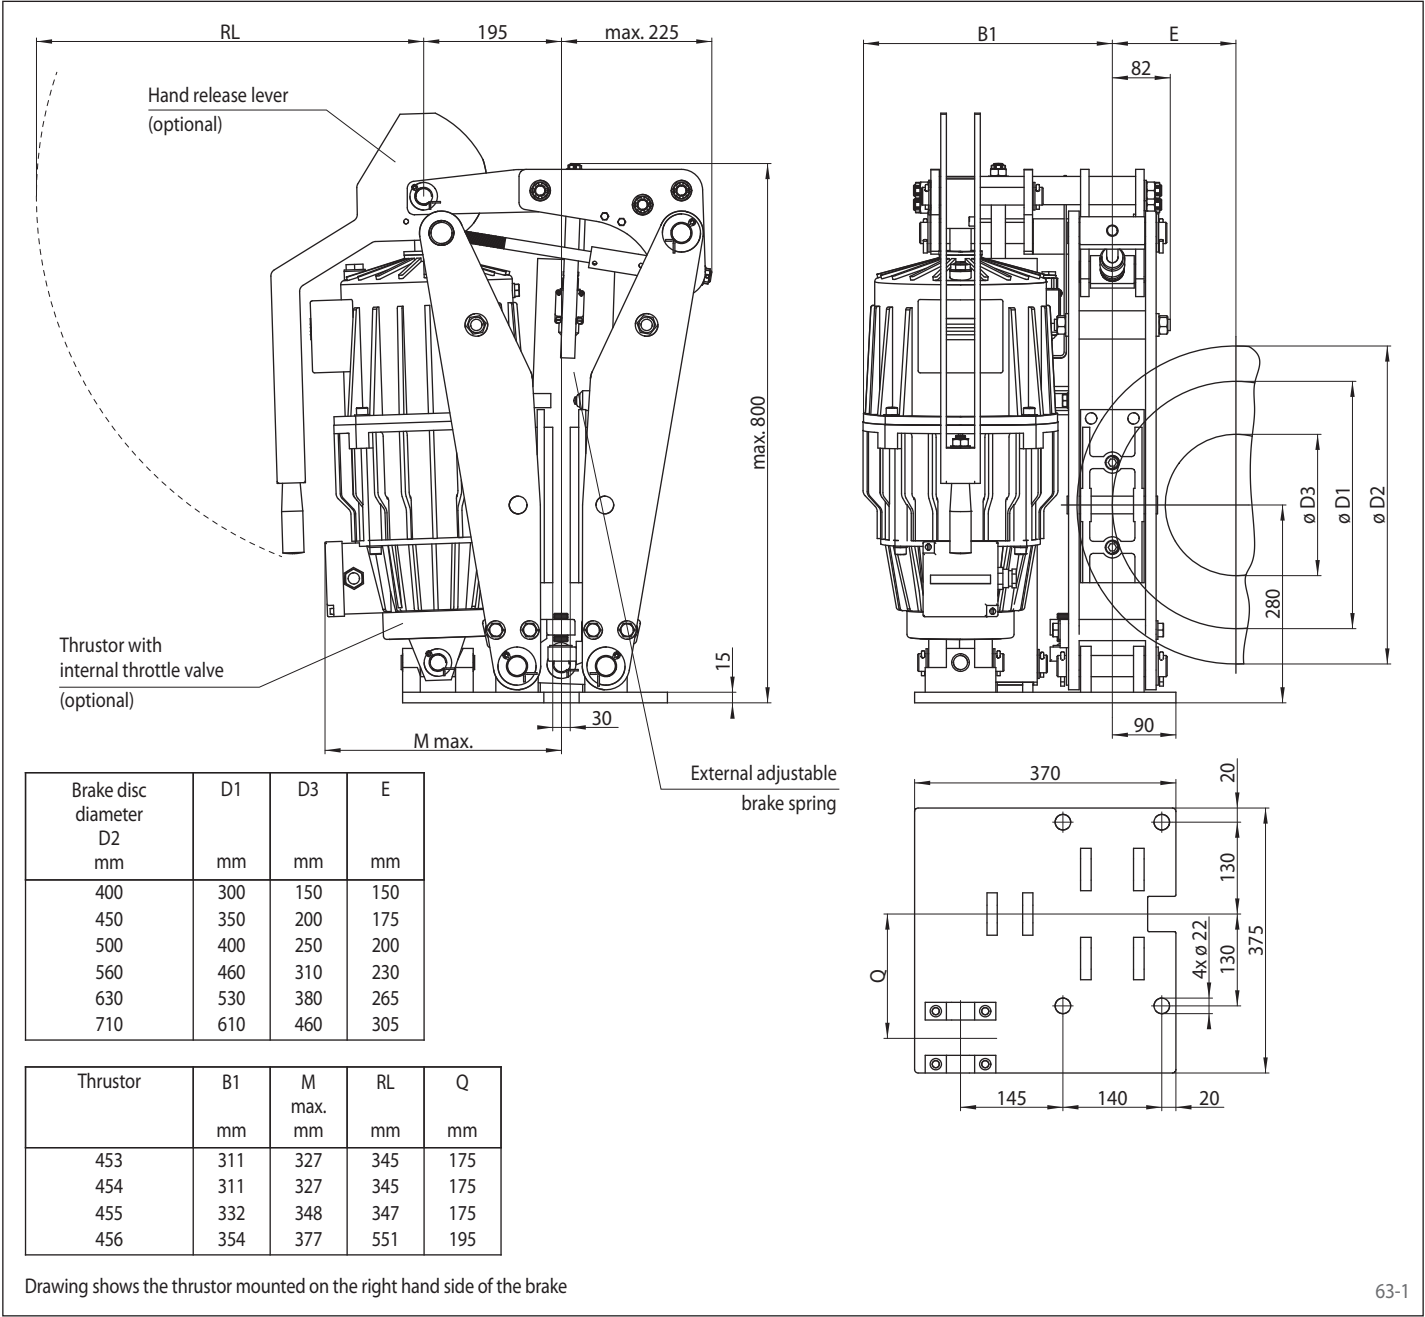

Options

- Micro-switch wear control
- Micro-switch status control
- Micro-switch residual piston stroke warning
- Hand release lever
- Hand release lever with padlock
- Thrustor with internal throttle valve
- Thrustor in heat resistant design
- Corrosion protected design
- Friction lining of sintered metall
- Pneumatic cylinder instead of thrustor
- Thrustor also available in other voltages and frequencies

Brake Caliper DS 280 FEA

spring activated – electrohydraulically released

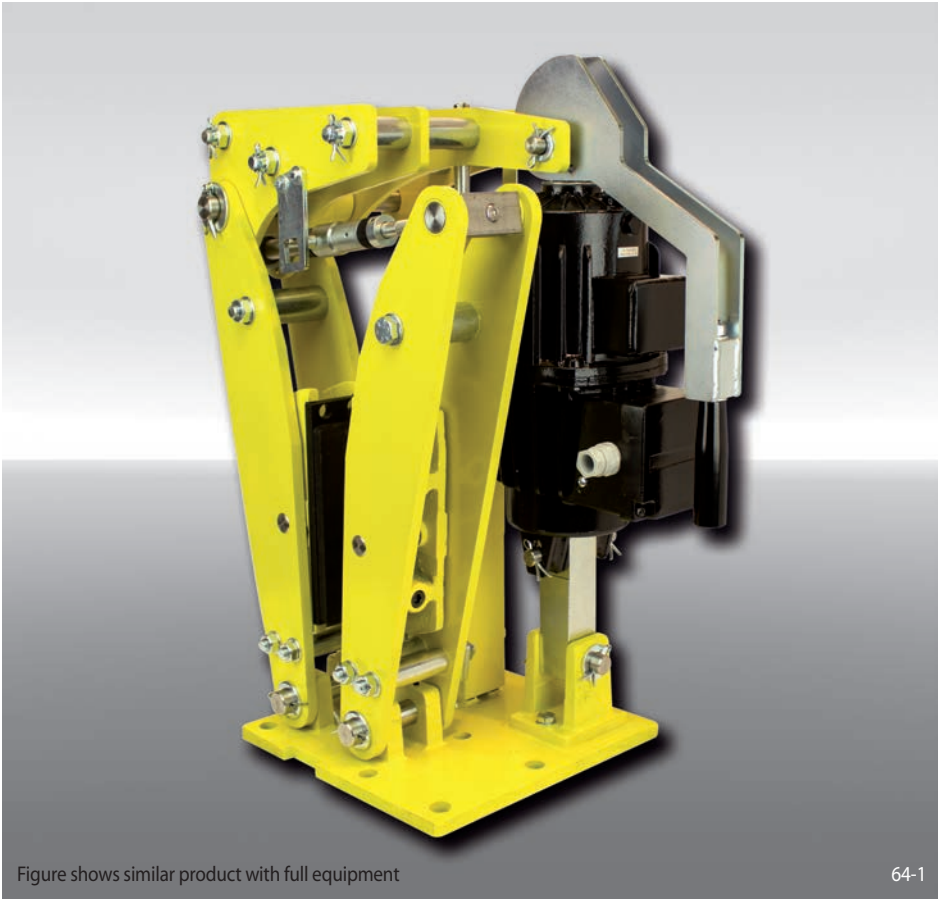


Figure shows similar product with full equipment

Features	Code
Brake Caliper	D
Disc Brake	S
Frame size 280	280
Spring activated	F
Electrohydraulically released	E
Automatic adjustment to accommodate friction block wear	A
Thrustors 453, 454, 455 or 456 are available	453 to 456
Thrustors mounted right or left available	R L
Thickness of brake disc 30 mm	30

Example for ordering

Brake Caliper DS 280 FEA, thrustor 456, thrustor mounted right, thickness of brake disc 30 mm:

DS 280 FEA - 456 R - 30


Technical Data

	Brake Caliper DS 280 FEA			
	with thrustor 453	with thrustor 454	with thrustor 455	with thrustor 456
Brake disc diameter	Braking torque	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm	Nm
400	1 200	1 450	2 400	3 950
450	1 400	1 700	2 800	4 650
500	1 600	1 950	3 200	5 300
560	1 850	2 250	3 650	6 100
630	2 100	2 600	4 250	7 050
710	2 450	3 000	4 850	8 100
Clamping force	10 050 N	12 250 N	20 050 N	33 250 N
Braking torque adjustable	20 - 100%	20 - 100%	20 - 100%	20 - 100%
Nominal power	240 W	280 W	370 W	590 W
Oil volume	3,5 l	3,5 l	4,5 l	11 l
Voltage	230/400 V	230/400 V	230/400 V	230/400 V
Weight	126 kg	126 kg	132 kg	158 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Brake Caliper DS 280 FEA

spring activated – electrohydraulically released

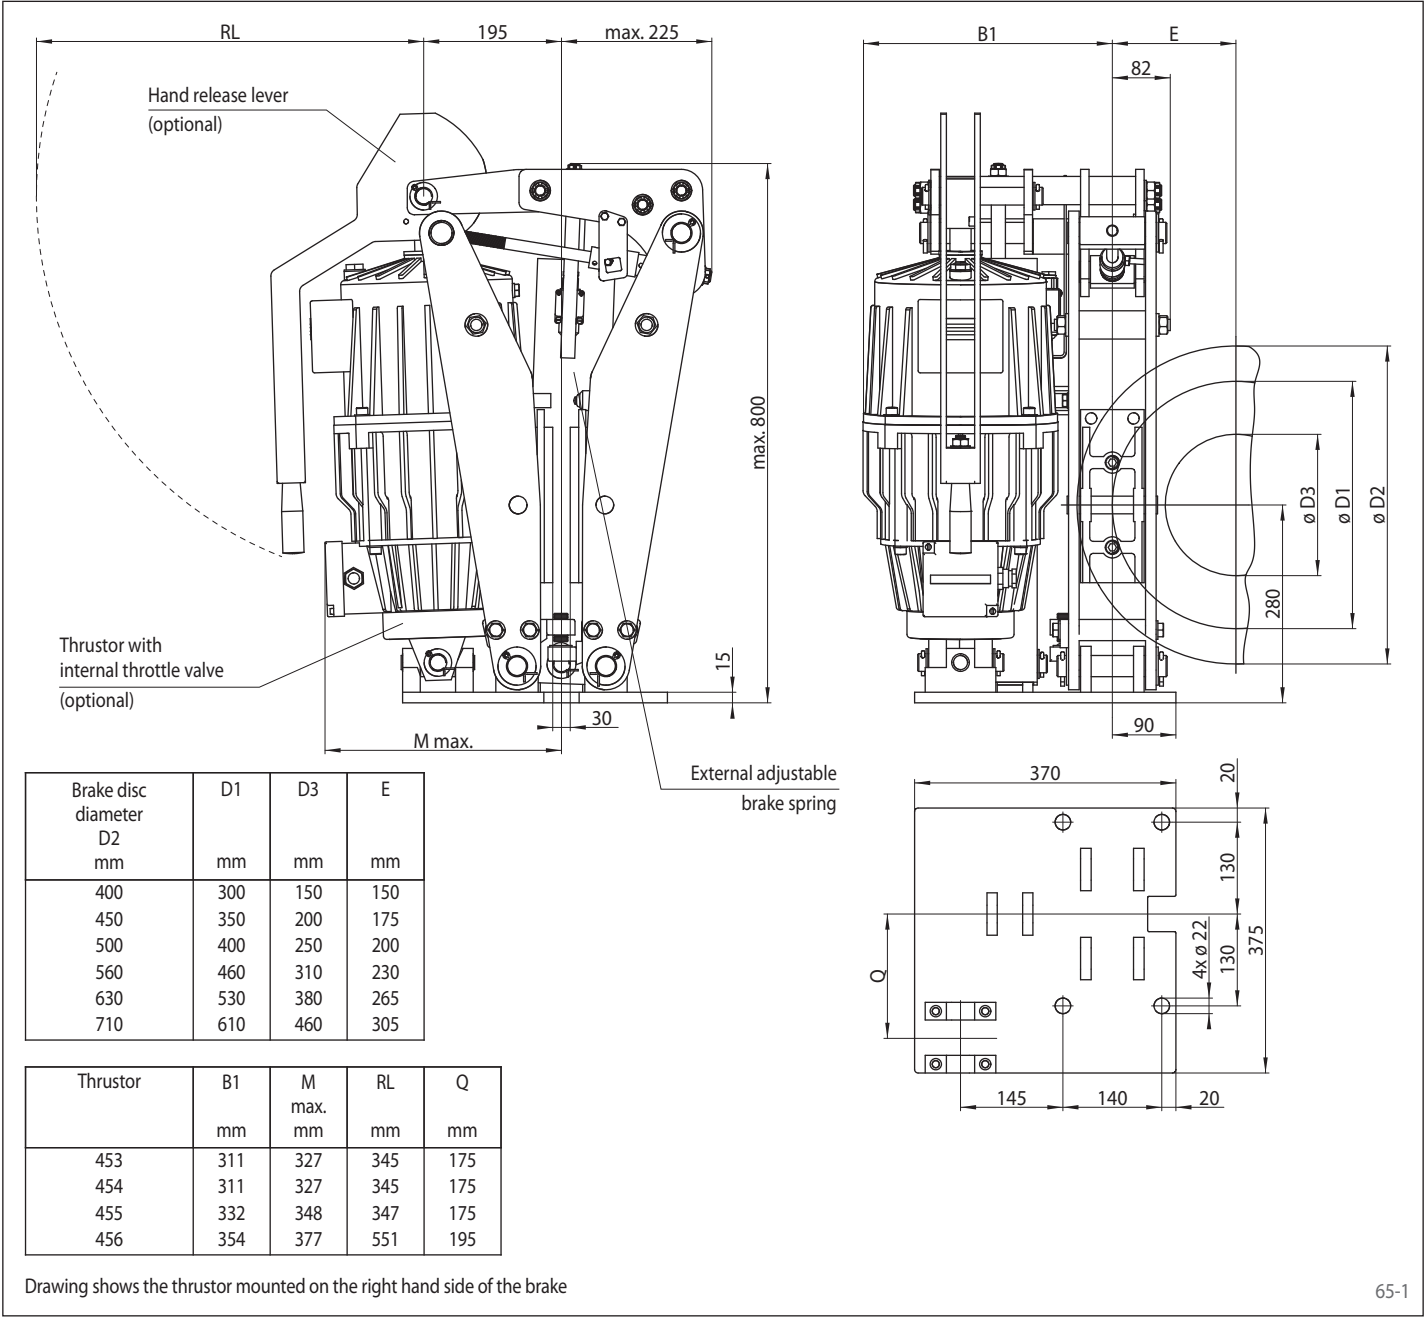


Options

- Micro-switch wear control
- Micro-switch status control
- Micro-switch residual piston stroke warning
- Hand release lever
- Hand release lever with padlock
- Thrustor with internal throttle valve
- Thrustor in heat resistant design
- Corrosion protected design
- Friction lining of sintered metall
- Pneumatic cylinder instead of thrustor
- Thrustor also available in other voltages and frequencies

Brake Caliper DS 370 FEM

spring activated – electrohydraulically released

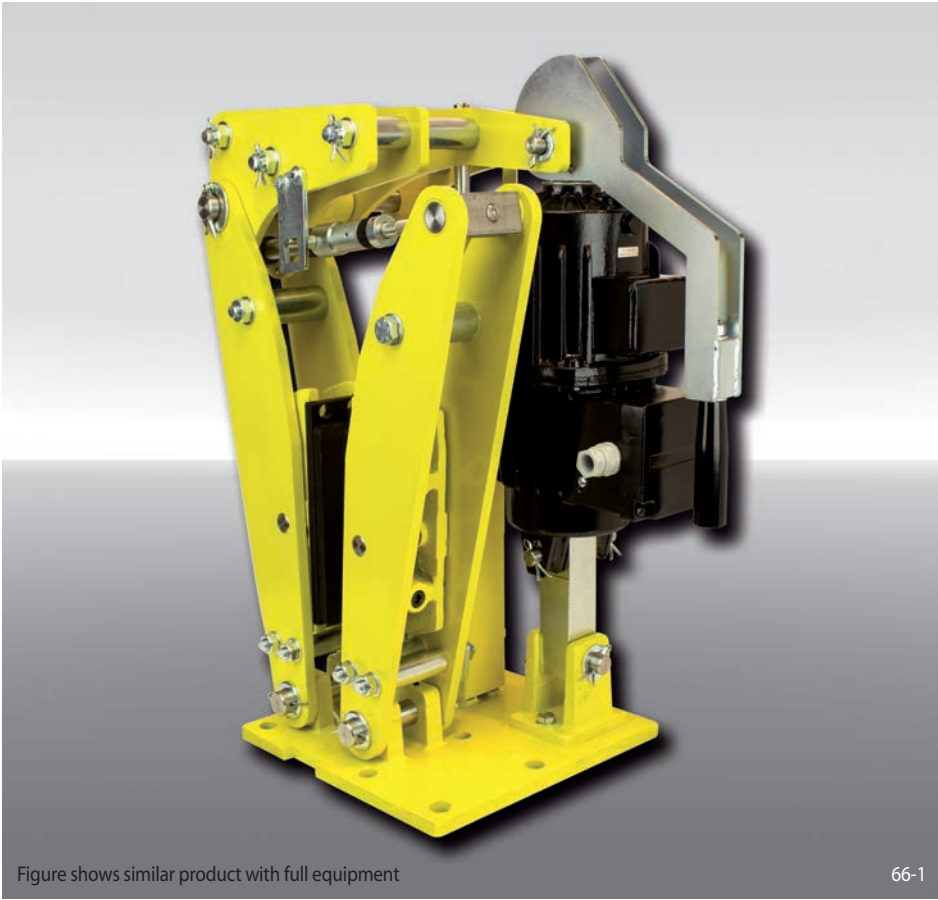

Features	Code
Brake Caliper	D
Disc Brake	S
Frame size 370	370
Spring activated	F
Electrohydraulically released	E
Manual adjustment to accommodate friction block wear	M
Thrustors 455, 456 or 457 are available	455 456 457
Thrustors mounted right or left available	R L
Thickness of brake disc 30 mm	30

Example for ordering

Brake Caliper DS 370 FEM, thrustor 456, thrustor mounted right, thickness of brake disc 30 mm:

DS 370 FEM - 456 R - 30


Technical Data

	Brake Caliper DS 370 FEM		
	with thrustor 455	with thrustor 456	with thrustor 457
Brake disc diameter	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm
500	2950	5000	7400
560	3450	5800	8600
630	4000	6750	10000
710	4550	7850	11600
800	5350	9050	13400
900	6200	10400	15400
1000	7000	11750	17400
1250	9000	15000	22400
Clamping force	20100 N	33850 N	50000 N
Braking torque adjustable	20 - 100%	20 - 100%	20 - 100%
Nominal power	370 W	590 W	680 W
Oil volume	4,5 l	11 l	11 l
Voltage	230/400 V	230/400 V	230/400 V
Weight	241 kg	267 kg	267 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Brake Caliper DS 370 FEM

spring activated – electrohydraulically released

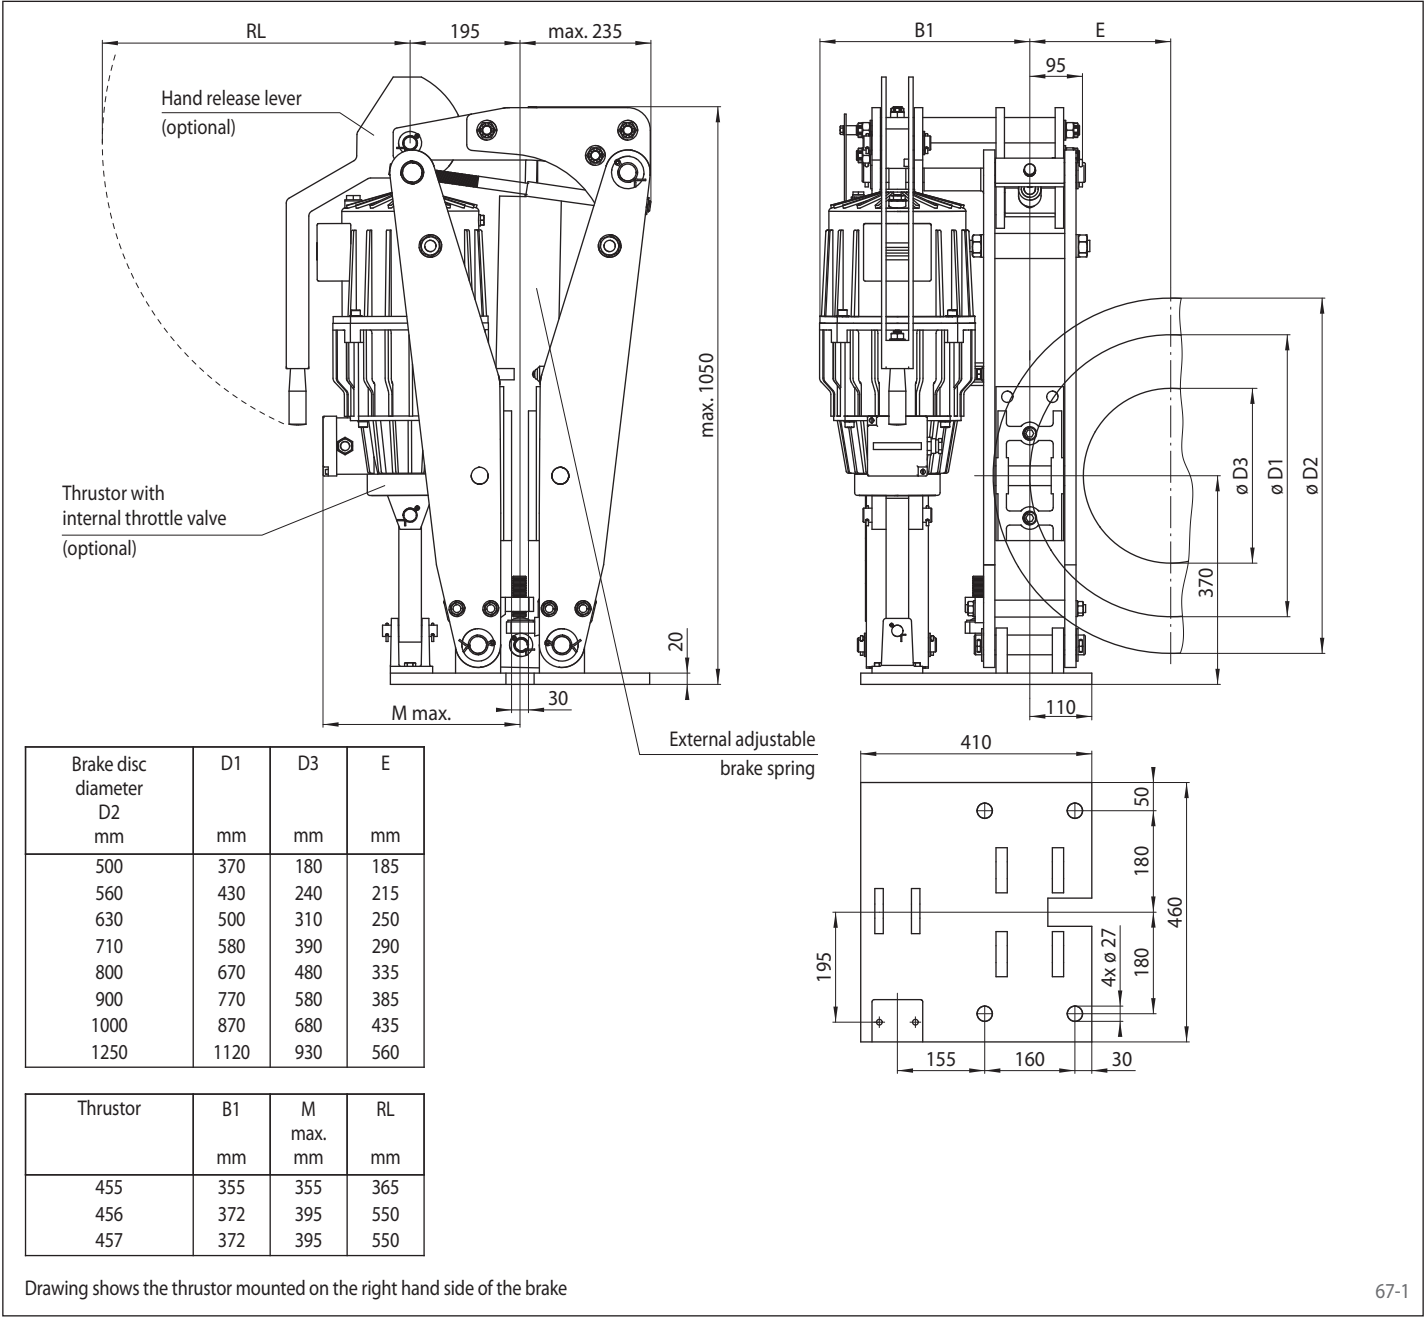

Options

- Micro-switch wear control
- Micro-switch status control
- Micro-switch residual piston stroke warning
- Hand release lever
- Hand release lever with padlock
- Thrustor with internal throttle valve
- Thrustor in heat resistant design
- Corrosion protected design
- Friction lining of sintered metall
- Pneumatic cylinder instead of thrustor
- Thrustor also available in other voltages and frequencies

Brake Caliper DS 370 FEA

spring activated – electrohydraulically released

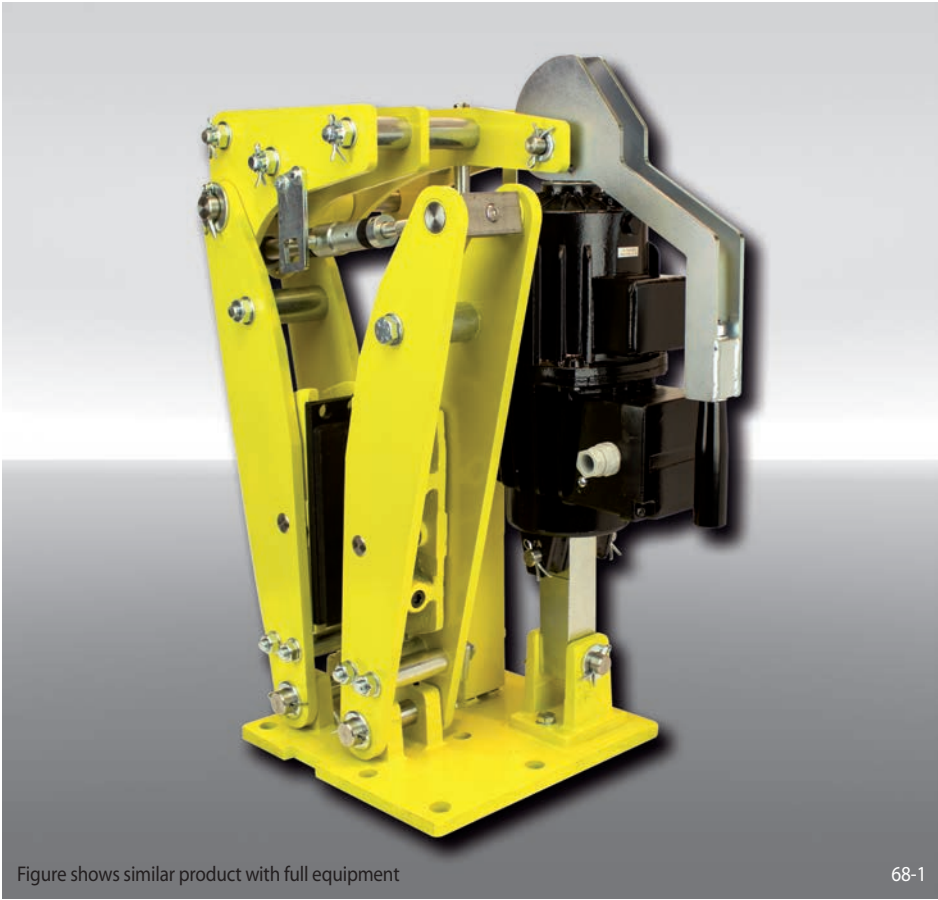


Figure shows similar product with full equipment

Features	Code
Brake Caliper	D
Disc Brake	S
Frame size 370	370
Spring activated	F
Electrohydraulically released	E
Automatic adjustment to accommodate friction block wear	A
Thrustors 455, 456 or 457 are available	455 456 457
Thrustors mounted right or left available	R L
Thickness of brake disc 30 mm	30

Example for ordering


Brake Caliper DS 370 FEA, thrustor 456, thrustor mounted right, thickness of brake disc 30 mm:

DS 370 FEA - 456 R - 30

Technical Data

	Brake Caliper DS 370 FEA		
	with thrustor 455	with thrustor 456	with thrustor 457
Brake disc diameter	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm
500	2950	5000	7400
560	3450	5800	8600
630	4000	6750	10000
710	4550	7850	11600
800	5350	9050	13400
900	6200	10400	15400
1000	7000	11750	17400
1250	9000	15000	22400
Clamping force	20100 N	33850 N	50000 N
Braking torque adjustable	20 - 100%	20 - 100%	20 - 100%
Nominal power	370 W	590 W	680 W
Oil volume	4,5 l	11 l	11 l
Voltage	230/400 V	230/400 V	230/400 V
Weight	241 kg	267 kg	267 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

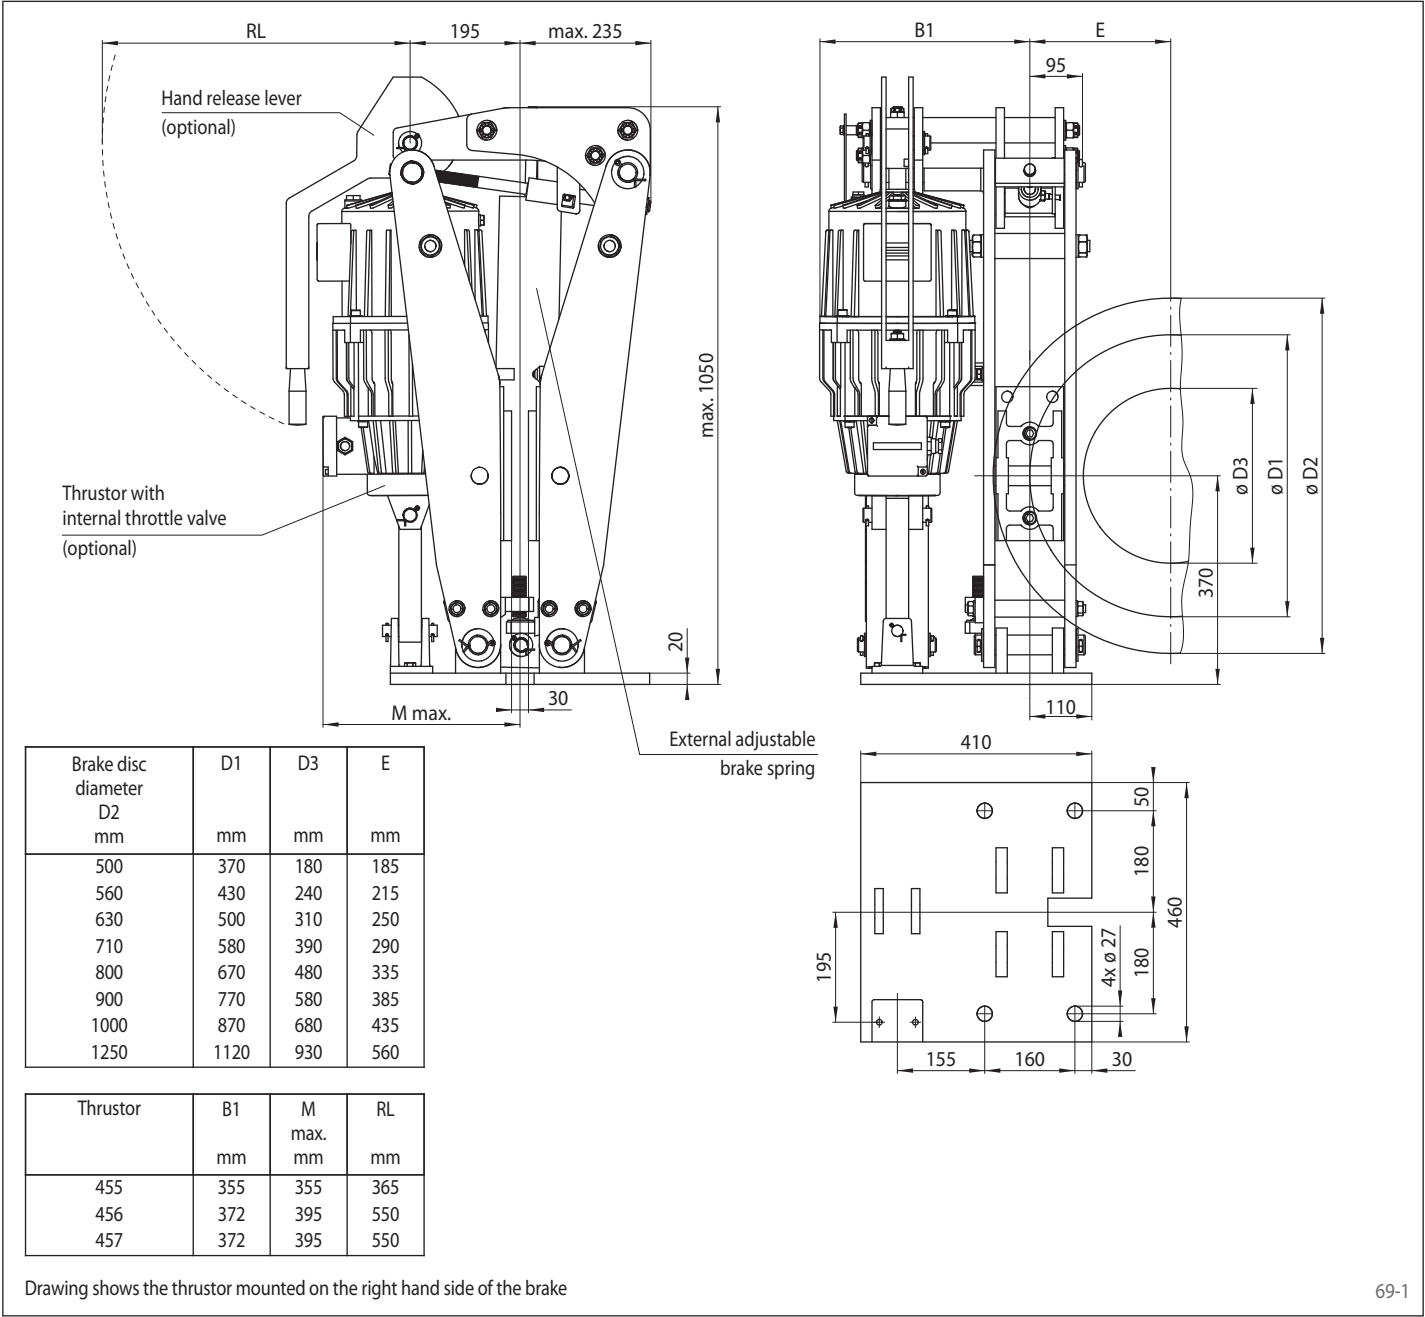


- ### Options

 - Micro-switch wear control
 - Micro-switch status control
 - Micro-switch residual piston stroke warning
 - Hand release lever
 - Hand release lever with padlock
 - Thrustor with internal throttle valve
 - Thrustor in heat resistant design
 - Corrosion protected design
 - Friction lining of sintered metall
- Pneumatic cylinder instead of thrustor
 - Thrustor also available in other voltages and frequencies

Brake Caliper DT 200 FEM ... NC

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

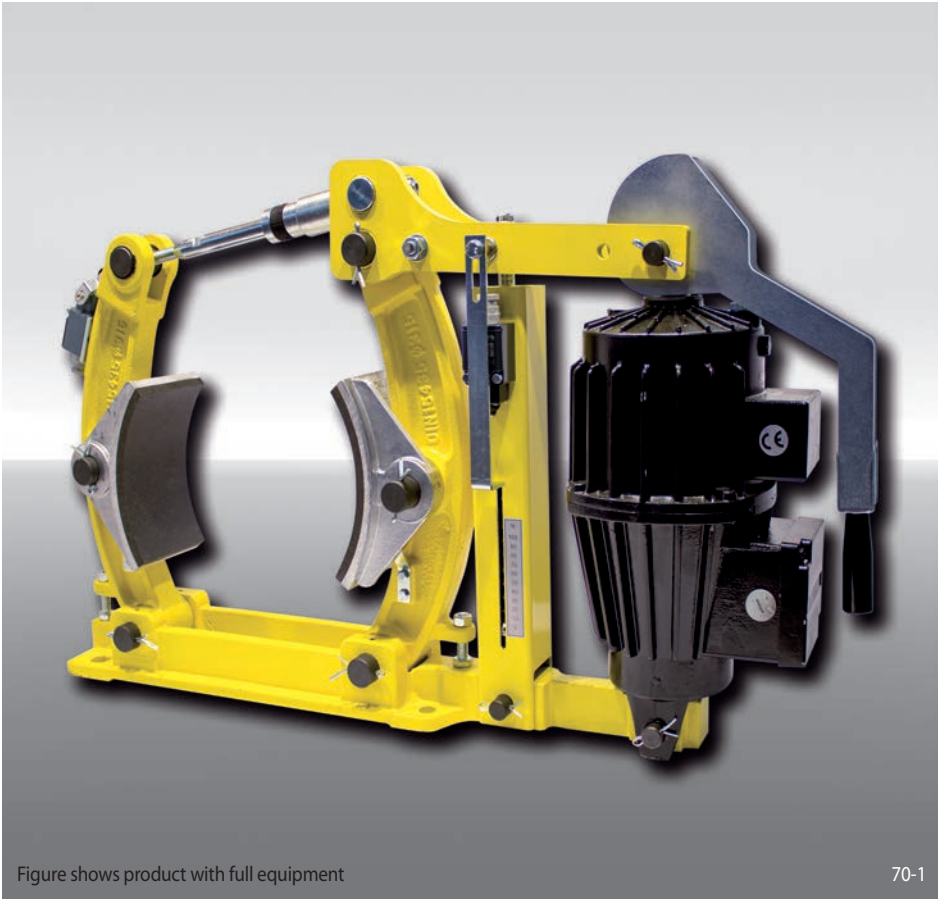

Features	Code
Brake Caliper	D
Drum Brake	T
Frame size 200	200
Spring activated	F
Electrohydraulically released	E
Manual adjustment to accommodate friction block wear	M
Thrustors 451 or 452 are available	451 452
Material: cast	NC

Example for ordering

Brake Caliper DT 200 FEM, thrustor 452, material: cast

DT 200 FEM - 452 - NC


Technical Data

	Brake Caliper DT 200 FEM ... NC	
	with thrustor 451	with thrustor 452
Brake drum diameter	Braking torque	Braking torque
mm	Nm	Nm
200	230	310
Clamping force	2875 N	3875 N
Braking torque adjustable (optional)	20 - 100%	20 - 100%
Nominal power	130 W	180 W
Oil volume	1,4 l	2,5 l
Voltage	230/400 V	230/400 V
Weight	26 kg	31 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Brake Caliper DT 200 FEM ... NC

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

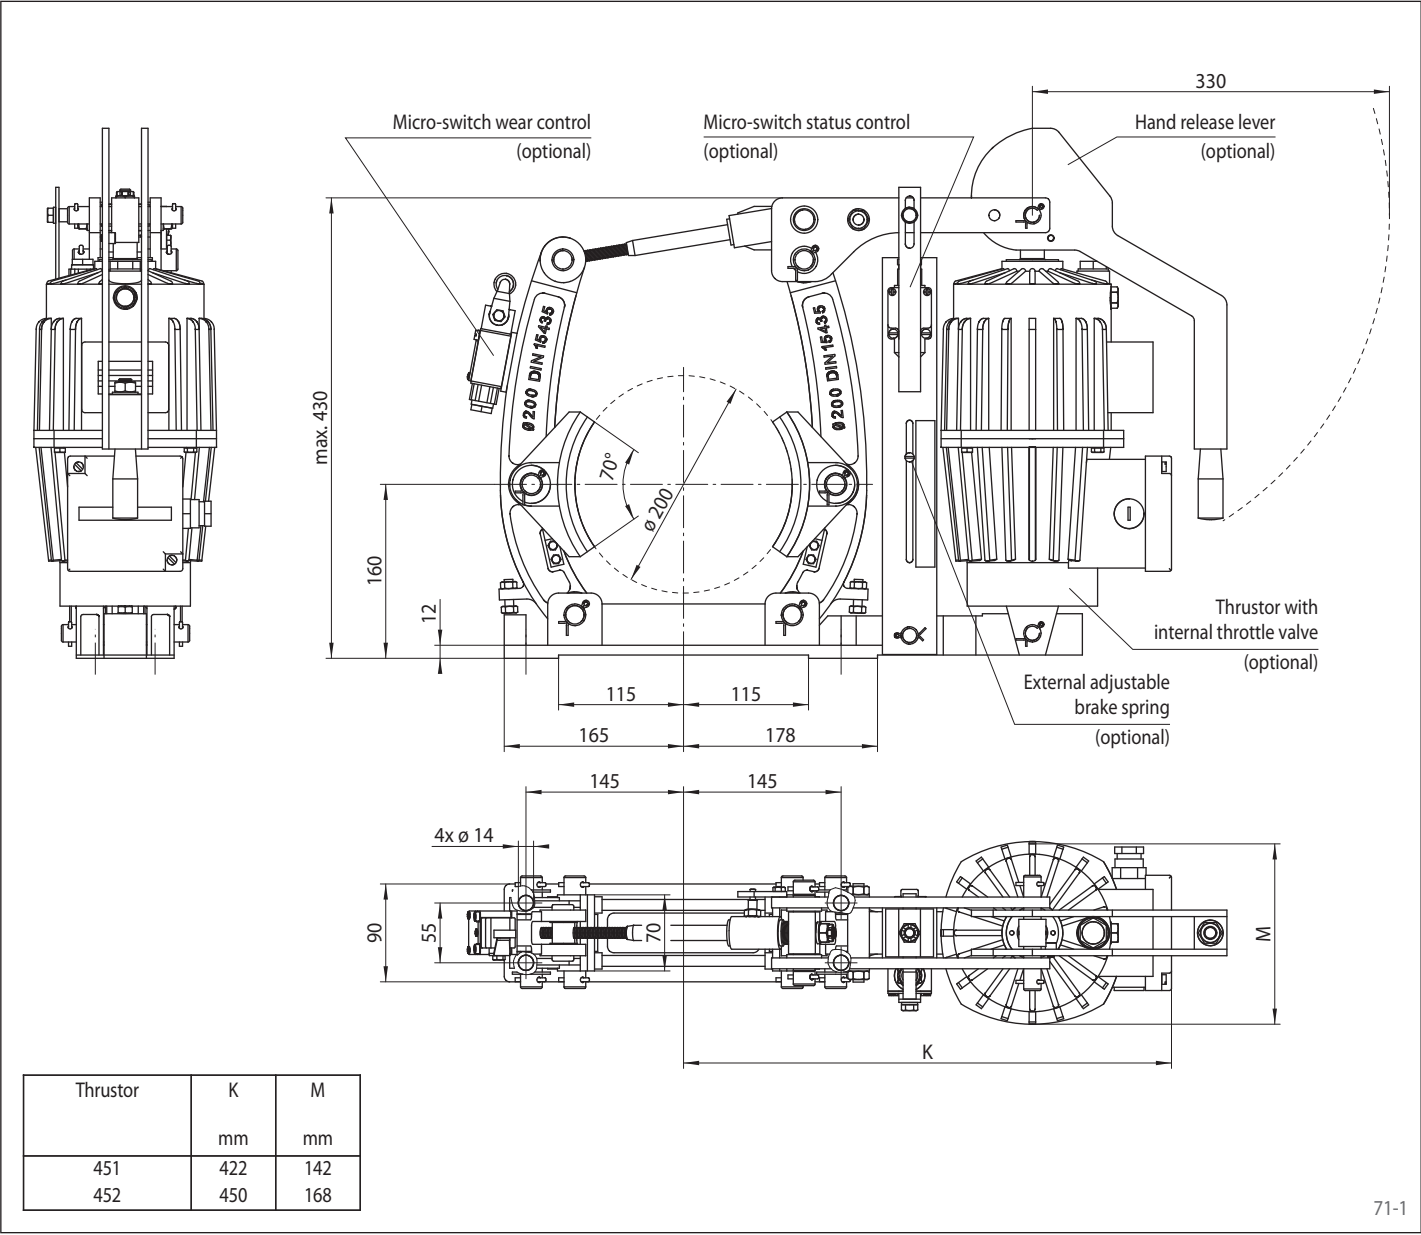


Options

- External adjustable brake spring
- Micro-switch wear control
- Micro-switch status control
- Hand release lever
- Thrustor with internal throttle valve
- Thrustor in heat resistant design
- Corrosion protected design
- Wider brake shoes and brake drums

Brake Caliper DT 200 FEA ... NC

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

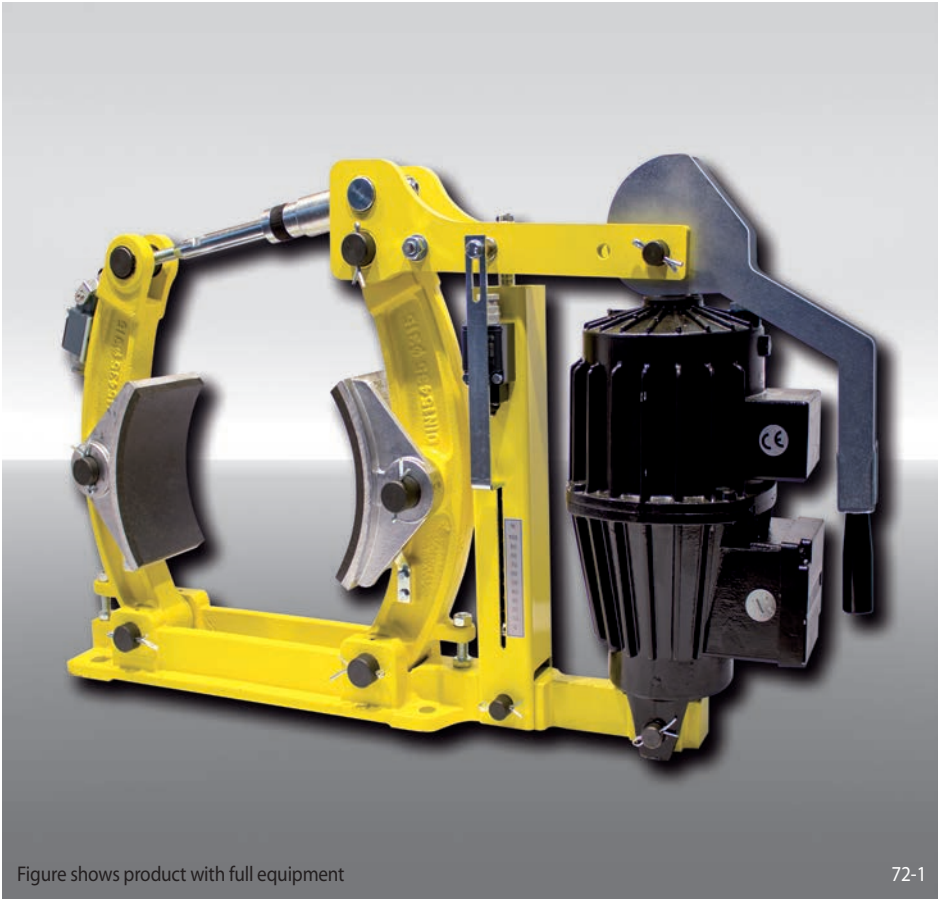

Features	Code
Brake Caliper	D
Drum Brake	T
Frame size 200	200
Spring activated	F
Electrohydraulically released	E
Automatic adjustment to accommodate friction block wear	A
Thrustors 451 or 452 are available	451 452
Material: cast	NC

Example for ordering

Brake Caliper DT 200 FEA, thrustor 452, material: cast

DT 200 FEA - 452 - NC


Technical Data

	Brake Caliper DT 200 FEA ... NC	
	with thrustor 451	with thrustor 452
Brake drum diameter	Braking torque	Braking torque
mm	Nm	Nm
200	230	310
Clamping force	2875 N	3875 N
Braking torque adjustable (optional)	20 - 100%	20 - 100%
Nominal power	130 W	180 W
Oil volume	1,4 l	2,5 l
Voltage	230/400 V	230/400 V
Weight	26 kg	31 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

RINGSPANN®

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

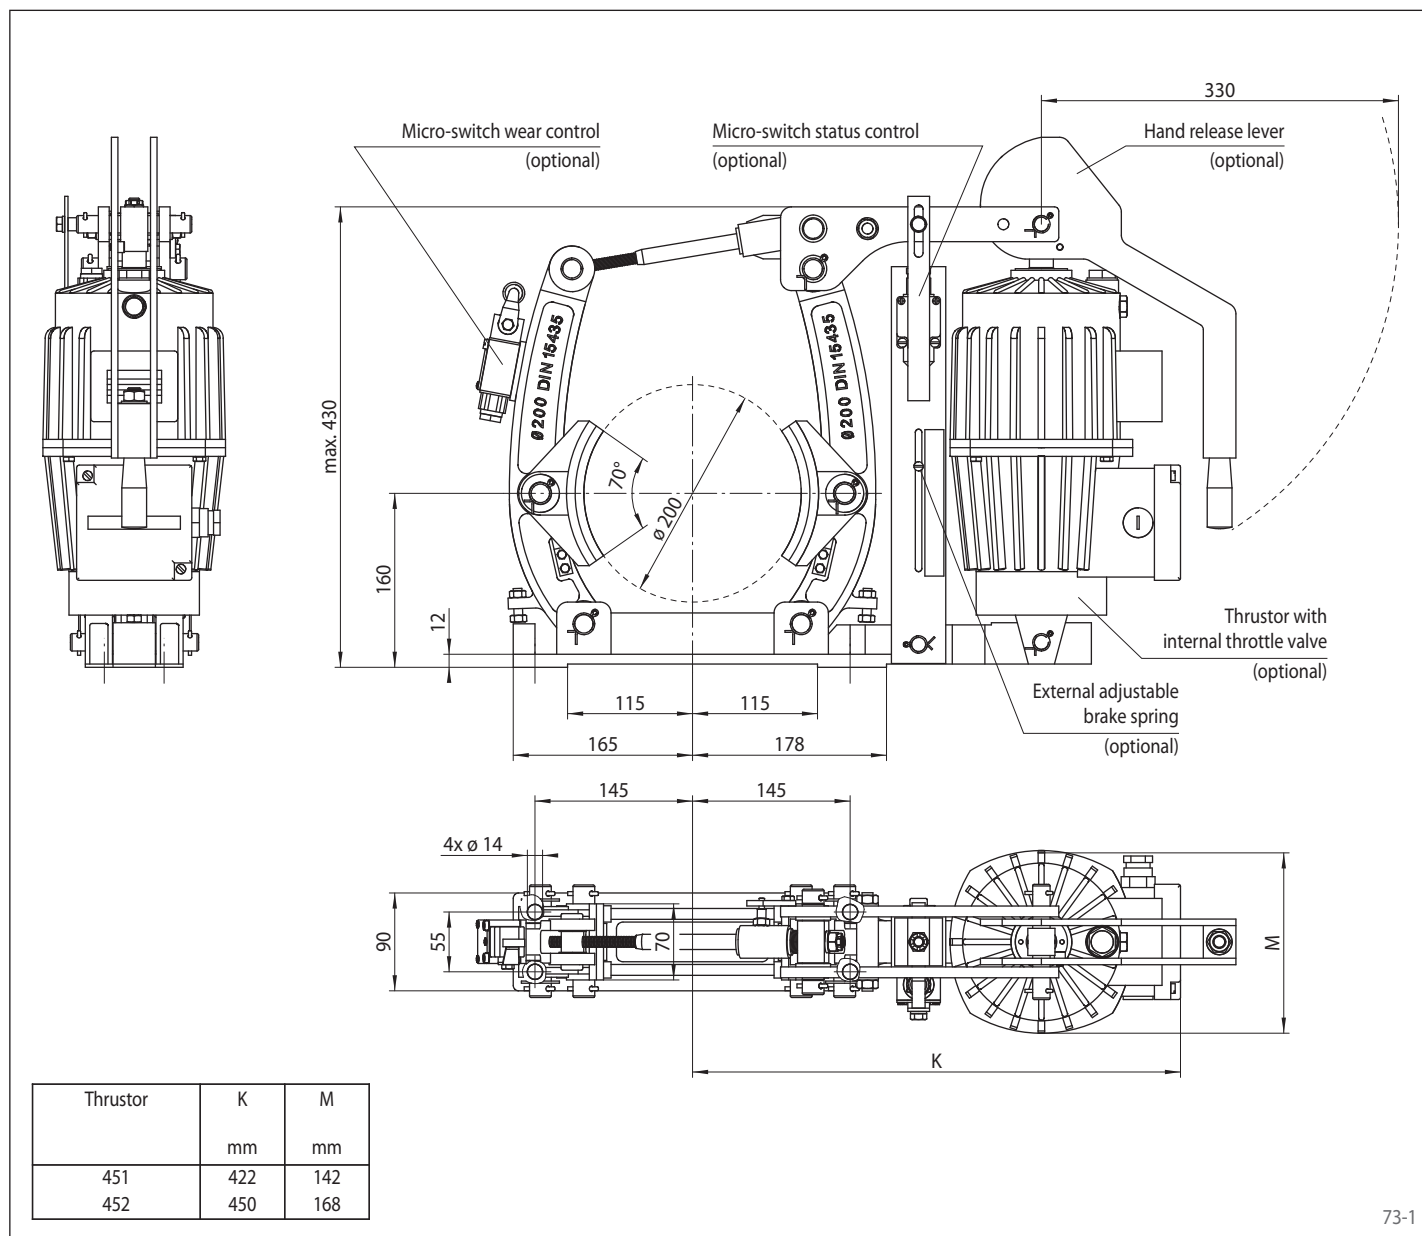


Options

- External adjustable brake spring
- Micro-switch wear control
- Micro-switch status control
- Hand release lever
- Thrustor with internal throttle valve
- Thrustor in heat resistant design
- Corrosion protected design
- Wider brake shoes and brake drums

Brake Caliper DT 200 FEA ... ST

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

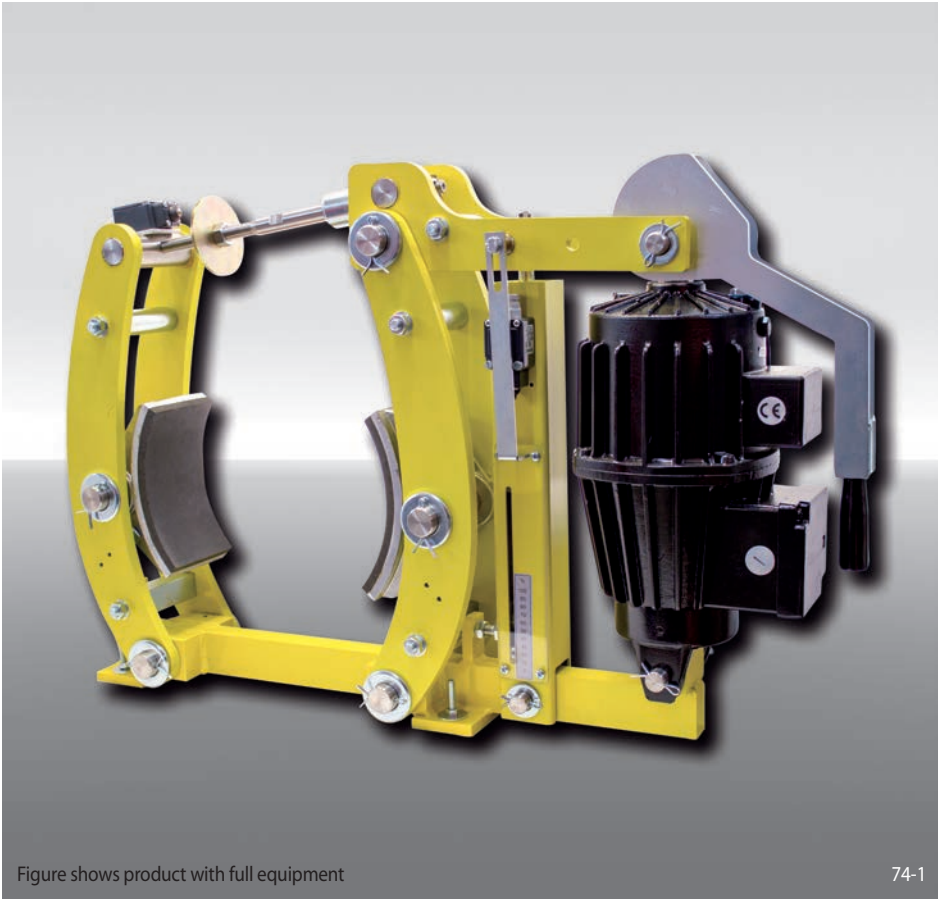

Features	Code
Brake Caliper	D
Drum Brake	T
Frame size 200	200
Spring activated	F
Electrohydraulically released	E
Automatic adjustment to accommodate friction block wear	A
Thrustors 451 or 452 are available	451 452
Material: steel	ST

Example for ordering

Brake Caliper DT 200 FEA, thrustor 452, material: steel


DT 200 FEA - 452 - ST

Technical Data

	Brake Caliper DT 200 FEA ... ST	
	with thrustor 451	with thrustor 452
Brake drum diameter	Braking torque	Braking torque
mm	Nm	Nm
200	250	330
Clamping force	3 125 N	4 125 N
Braking torque adjustable	20 - 100%	20 - 100%
Nominal power	130 W	180 W
Oil volume	1,4 l	2,5 l
Voltage	230/400 V	230/400 V
Weight	32 kg	37 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

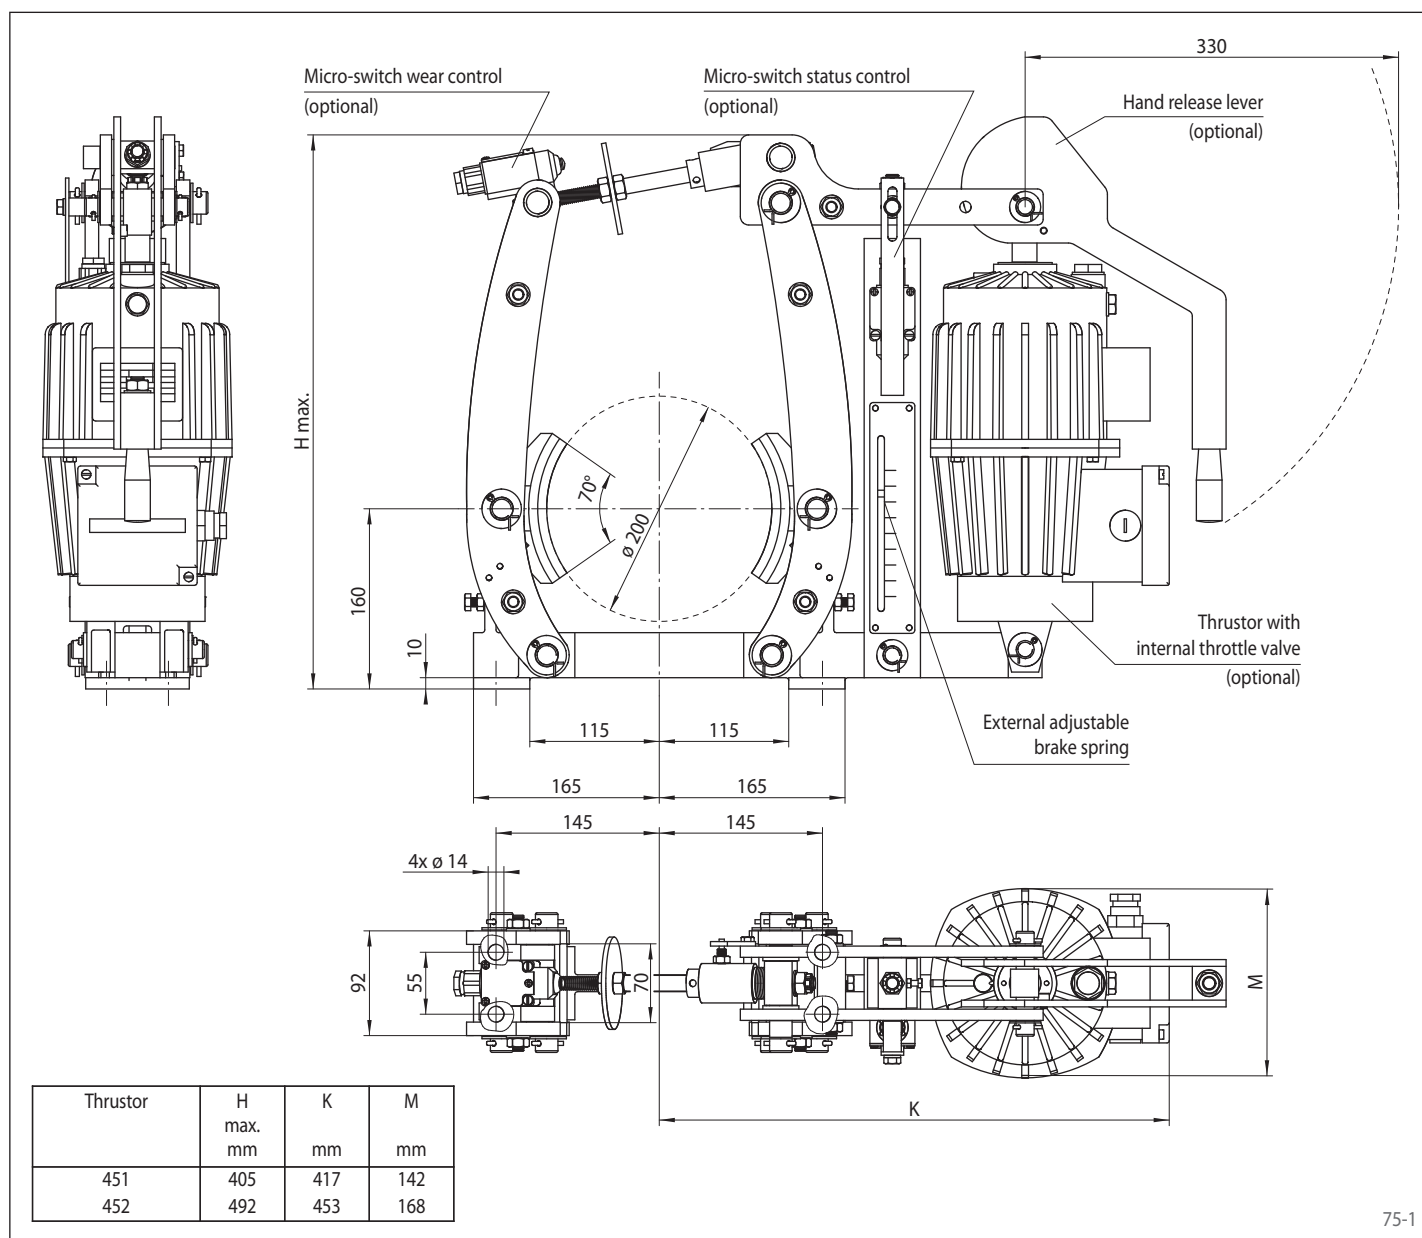

Options

- Micro-switch wear control
- Micro-switch status control
- Hand release lever
- Thrustor with internal throttle valve
- Thrustor in heat resistant design
- Corrosion protected design
- Wider brake shoes and brake drums

Brake Caliper DT 250 FEM ... NC

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

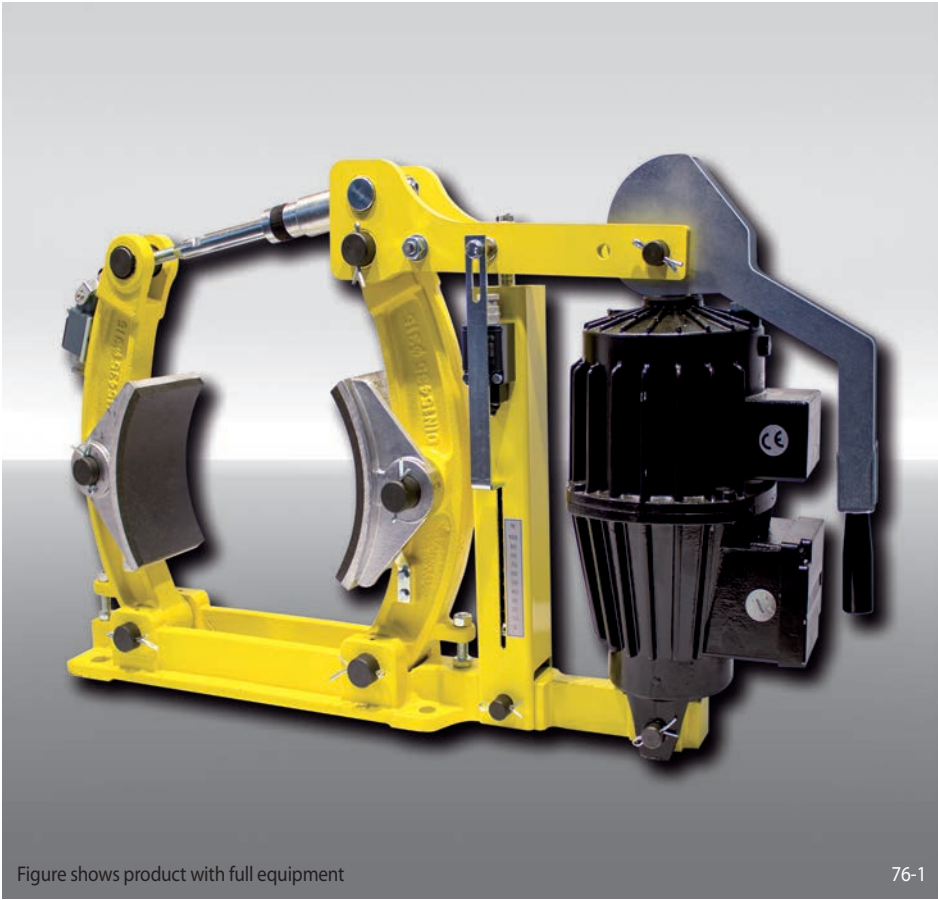


Figure shows product with full equipment

76-1

Features	Code
Brake Caliper	D
Drum Brake	T
Frame size 250	250
Spring activated	F
Electrohydraulically released	E
Manual adjustment to accommodate friction block wear	M
Thrustors 451, 452 or 453 are available	451 452 453
Material: cast	NC

Example for ordering

Brake Caliper DT 250 FEM, thrustor 452, material: cast

DT 250 FEM - 452 - NC


Technical Data

	Brake Caliper DT 250 FEM ... NC		
	with thrustor 451	with thrustor 452	with thrustor 453
Brake drum diameter	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm
250	260	350	700
Clamping force	2600 N	3500 N	7000 N
Braking torque adjustable (optional)	20 - 100%	20 - 100%	20 - 100%
Nominal power	130 W	180 W	240 W
Oil volume	1,4 l	2,5 l	3,5 l
Voltage	230/400 V	230/400 V	230/400 V
Weight	39 kg	44 kg	46 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Brake Caliper DT 250 FEM ... NC

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

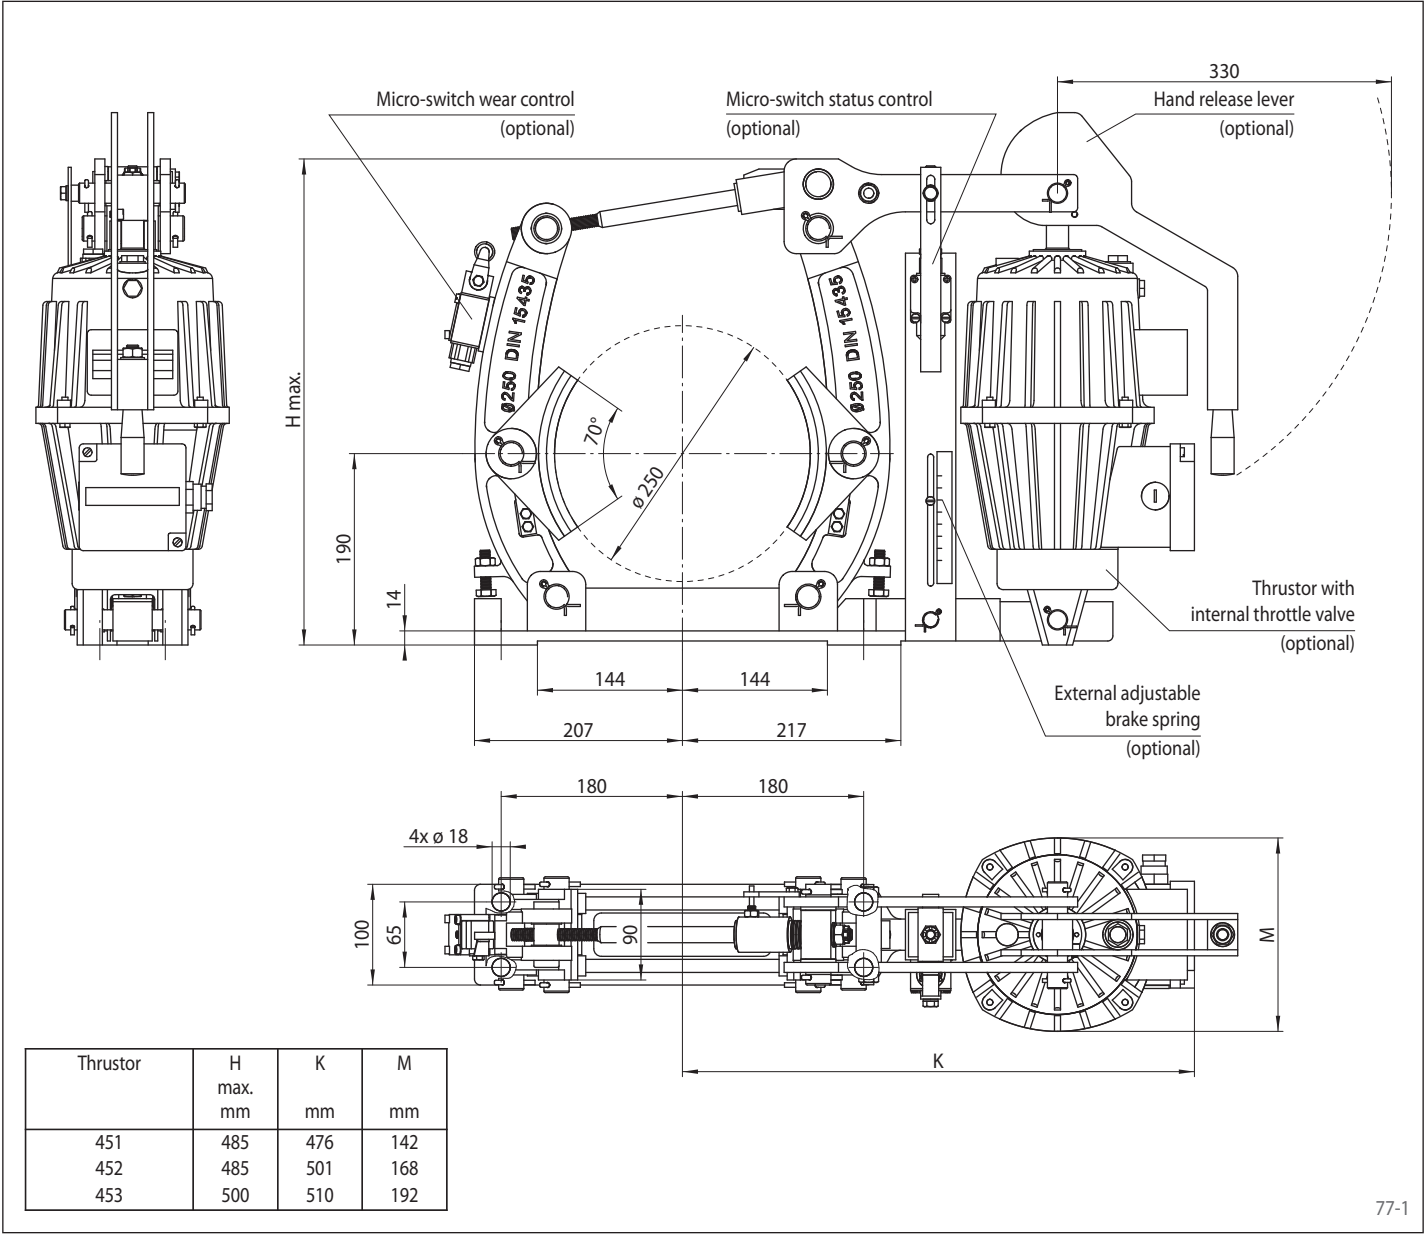


Options

- External adjustable brake spring
- Micro-switch wear control
- Micro-switch status control
- Hand release lever
- Thrustor with internal throttle valve
- Thrustor in heat resistant design
- Corrosion protected design
- Wider brake shoes and brake drums

Brake Caliper DT 250 FEA ... NC

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

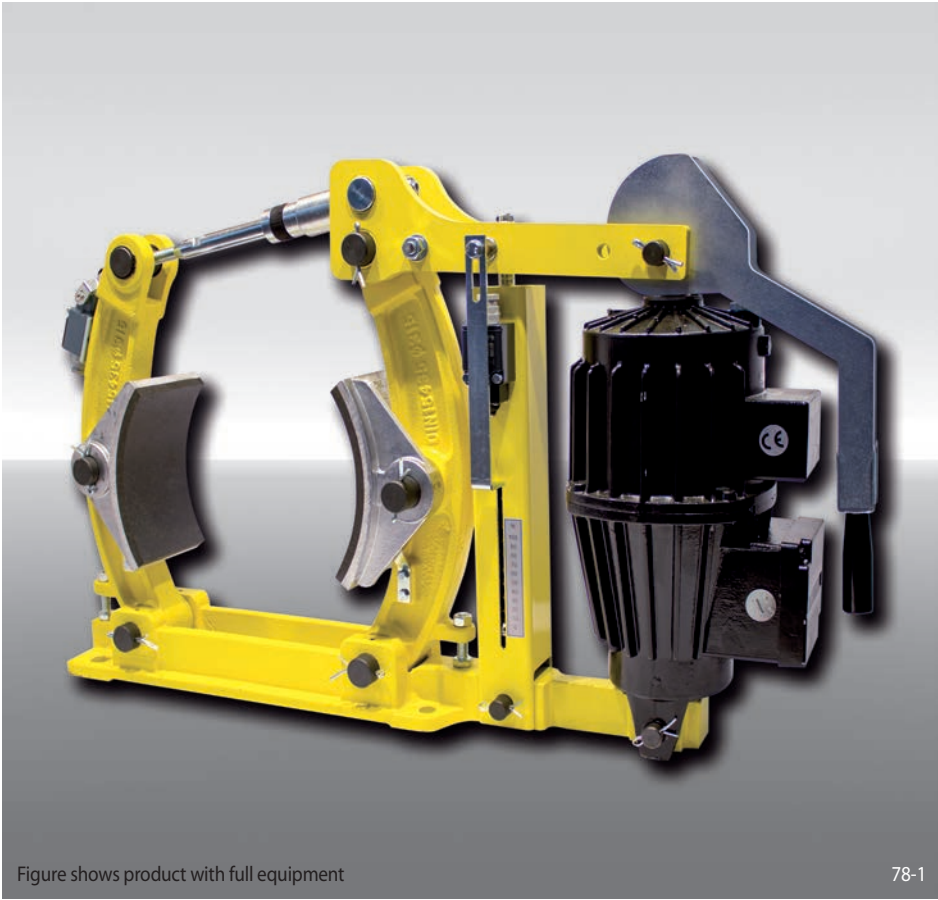

Features	Code
Brake Caliper	D
Drum Brake	T
Frame size 250	250
Spring activated	F
Electrohydraulically released	E
Automatic adjustment to accommodate friction block wear	A
Thrustors 451, 452 or 453 are available	451 452 453
Material: cast	NC

Example for ordering

Brake Caliper DT 250 FEA, thrustor 452, material: cast

DT 250 FEA - 452 - NC


Technical Data

	Brake Caliper DT 250 FEA ... NC		
	with thrustor 451	with thrustor 452	with thrustor 453
Brake drum diameter	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm
250	260	350	700
Clamping force	2600 N	3500 N	7000 N
Braking torque adjustable (optional)	20 - 100%	20 - 100%	20 - 100%
Nominal power	130 W	180 W	240 W
Oil volume	1,4 l	2,5 l	3,5 l
Voltage	230/400 V	230/400 V	230/400 V
Weight	39 kg	44 kg	46 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Brake Caliper DT 250 FEA ... NC

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

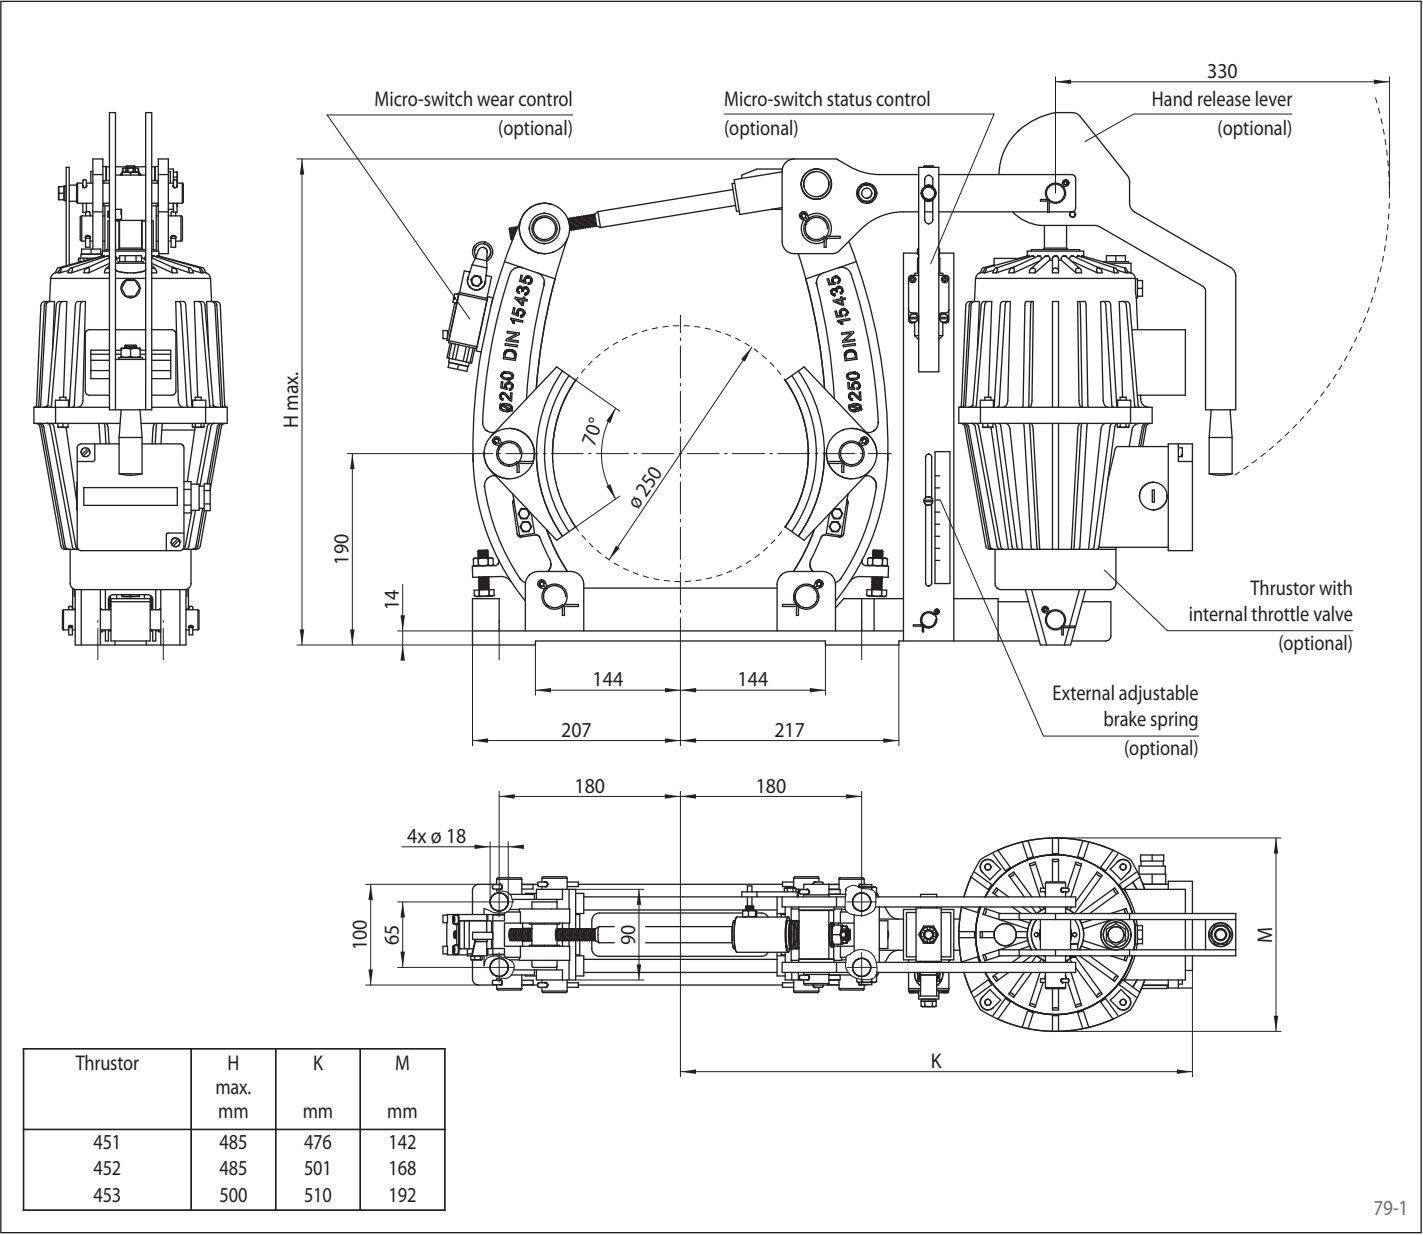


Options

- External adjustable brake spring
- Micro-switch wear control
- Micro-switch status control
- Hand release lever
- Thrustor with internal throttle valve
- Thrustor in heat resistant design
- Corrosion protected design
- Wider brake shoes and brake drums

Brake Caliper DT 250 FEA ... ST

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

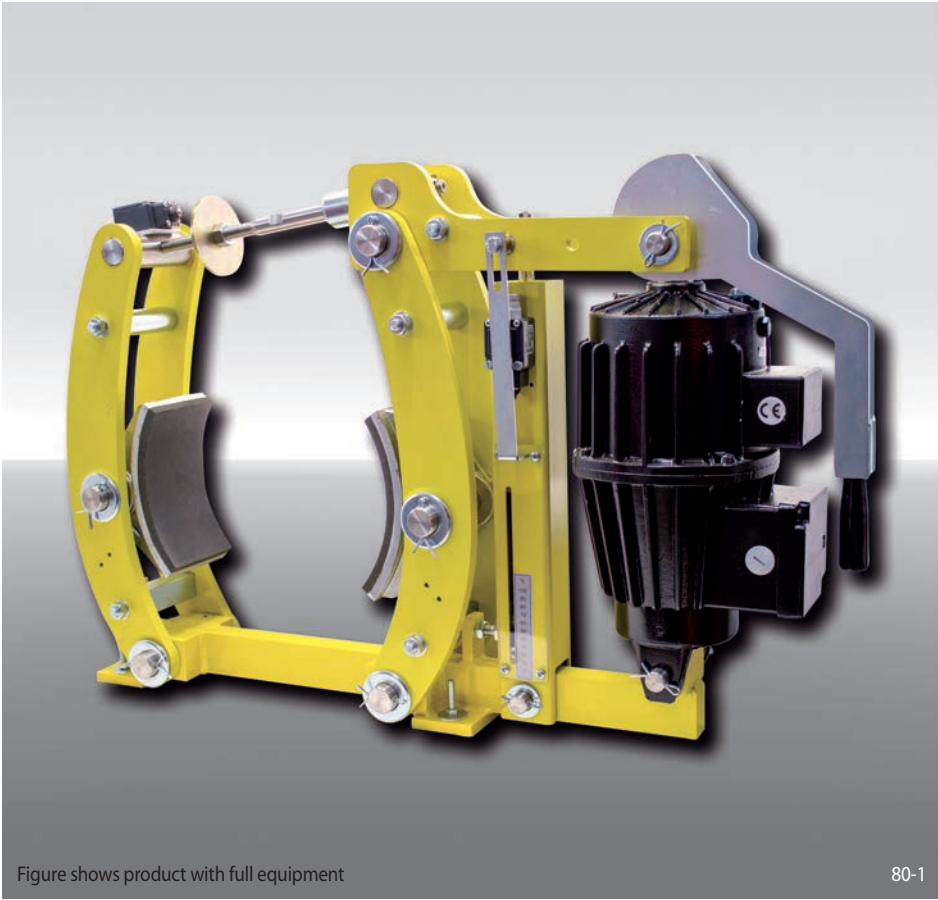

Features	Code
Brake Caliper	D
Drum Brake	T
Frame size 250	250
Spring activated	F
Electrohydraulically released	E
Automatic adjustment to accommodate friction block wear	A
Thrustors 451, 452 or 453 are available	451 452 453
Material: steel	ST

Example for ordering

Brake Caliper DT 250 FEA, thrustor 452, material: steel

DT 250 FEA - 452 - ST


Technical Data

	Brake Caliper DT 250 FEA ... ST		
	with thrustor 451	with thrustor 452	with thrustor 453
Brake drum diameter	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm
250	300	400	750
Clamping force	3 000 N	4 000 N	7 500 N
Braking torque adjustable	20 - 100%	20 - 100%	20 - 100%
Nominal power	130 W	180 W	240 W
Oil volume	1,4 l	2,5 l	3,5 l
Voltage	230/400 V	230/400 V	230/400 V
Weight	40 kg	45 kg	47 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Brake Caliper DT 250 FEA ... ST

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

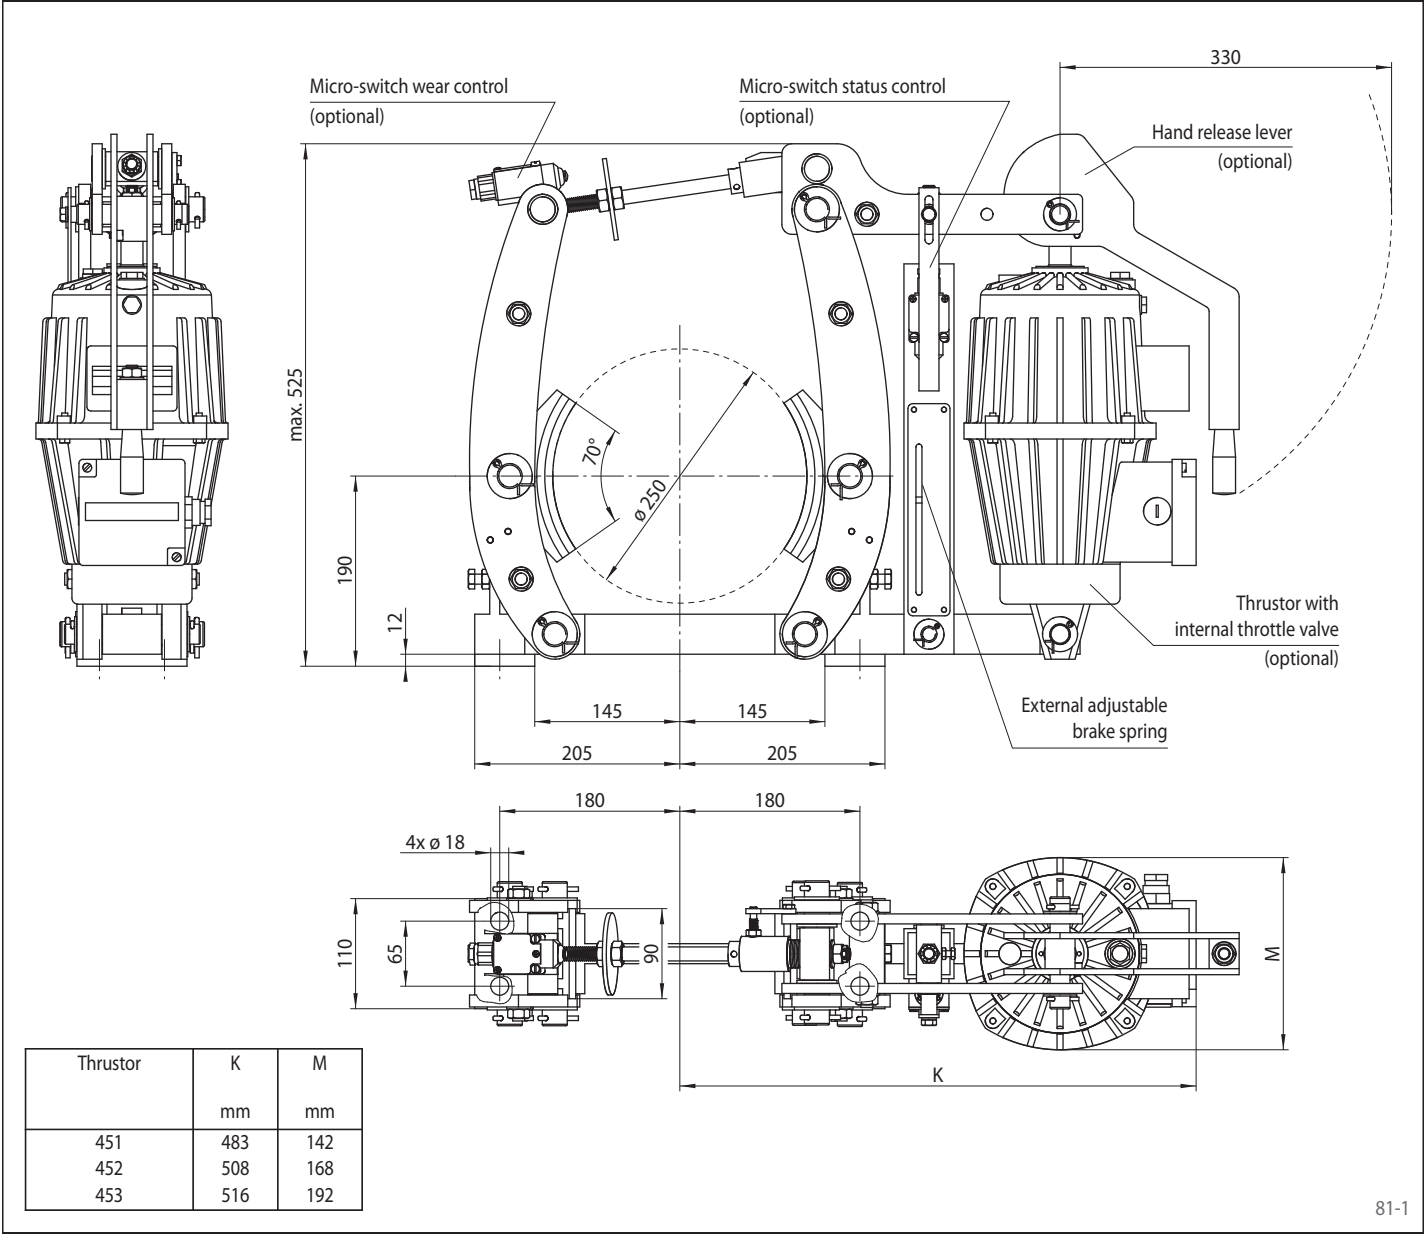


Options

- Micro-switch wear control
- Micro-switch status control
- Hand release lever
- Thrustor with internal throttle valve
- Thrustor in heat resistant design
- Corrosion protected design
- Wider brake shoes and brake drums

Brake Caliper DT 315 FEM ... NC

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

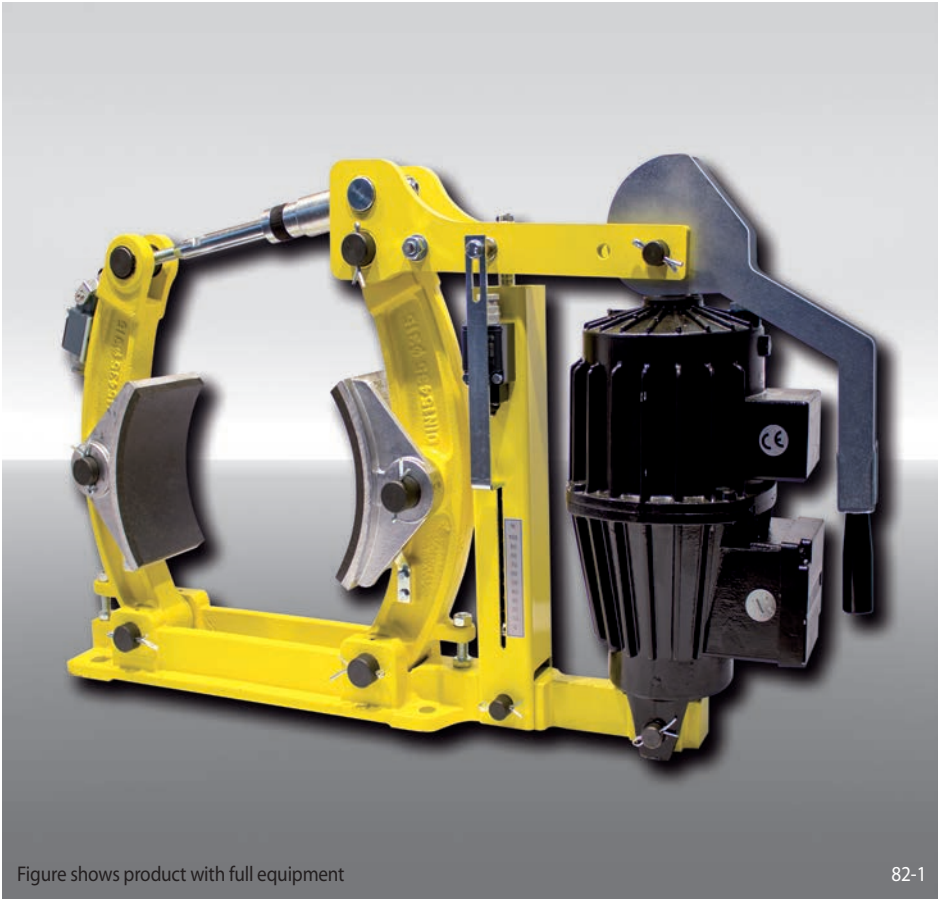

Features	Code
Brake Caliper	D
Drum Brake	T
Frame size 315	315
Spring activated	F
Electrohydraulically released	E
Manual adjustment to accommodate friction block wear	M
Thrustors 451, 452, 453, 454 or 455 are available	451 to 455
Material: cast	NC

Example for ordering

Brake Caliper DT 315 FEM, thrustor 453, material: cast

DT 315 FEM - 453 - NC


Technical Data

	Brake Caliper DT 315 FEM ... NC				
	with thrustor 451	with thrustor 452	with thrustor 453	with thrustor 454	with thrustor 455
Brake drum diameter	Braking torque	Braking torque	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm	Nm	Nm
315	285	425	850	1070	1700
Clamping force	2300 N	3400 N	6700 N	8500 N	13500 N
Braking torque adjustable (optional)	20 - 100%	20 - 100%	20 - 100%	20 - 100%	20 - 100%
Nominal power	130 W	180 W	240 W	280 W	370 W
Oil volume	1,4 l	2,5 l	3,5 l	3,5 l	4,5 l
Voltage	230/400 V	230/400 V	230/400 V	230/400 V	230/400 V
Weight	49 kg	54 kg	56 kg	56 kg	62 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

RINGSPANN®

**spring activated – electrohydraulically released
Drum Brake according to DIN 15 435**

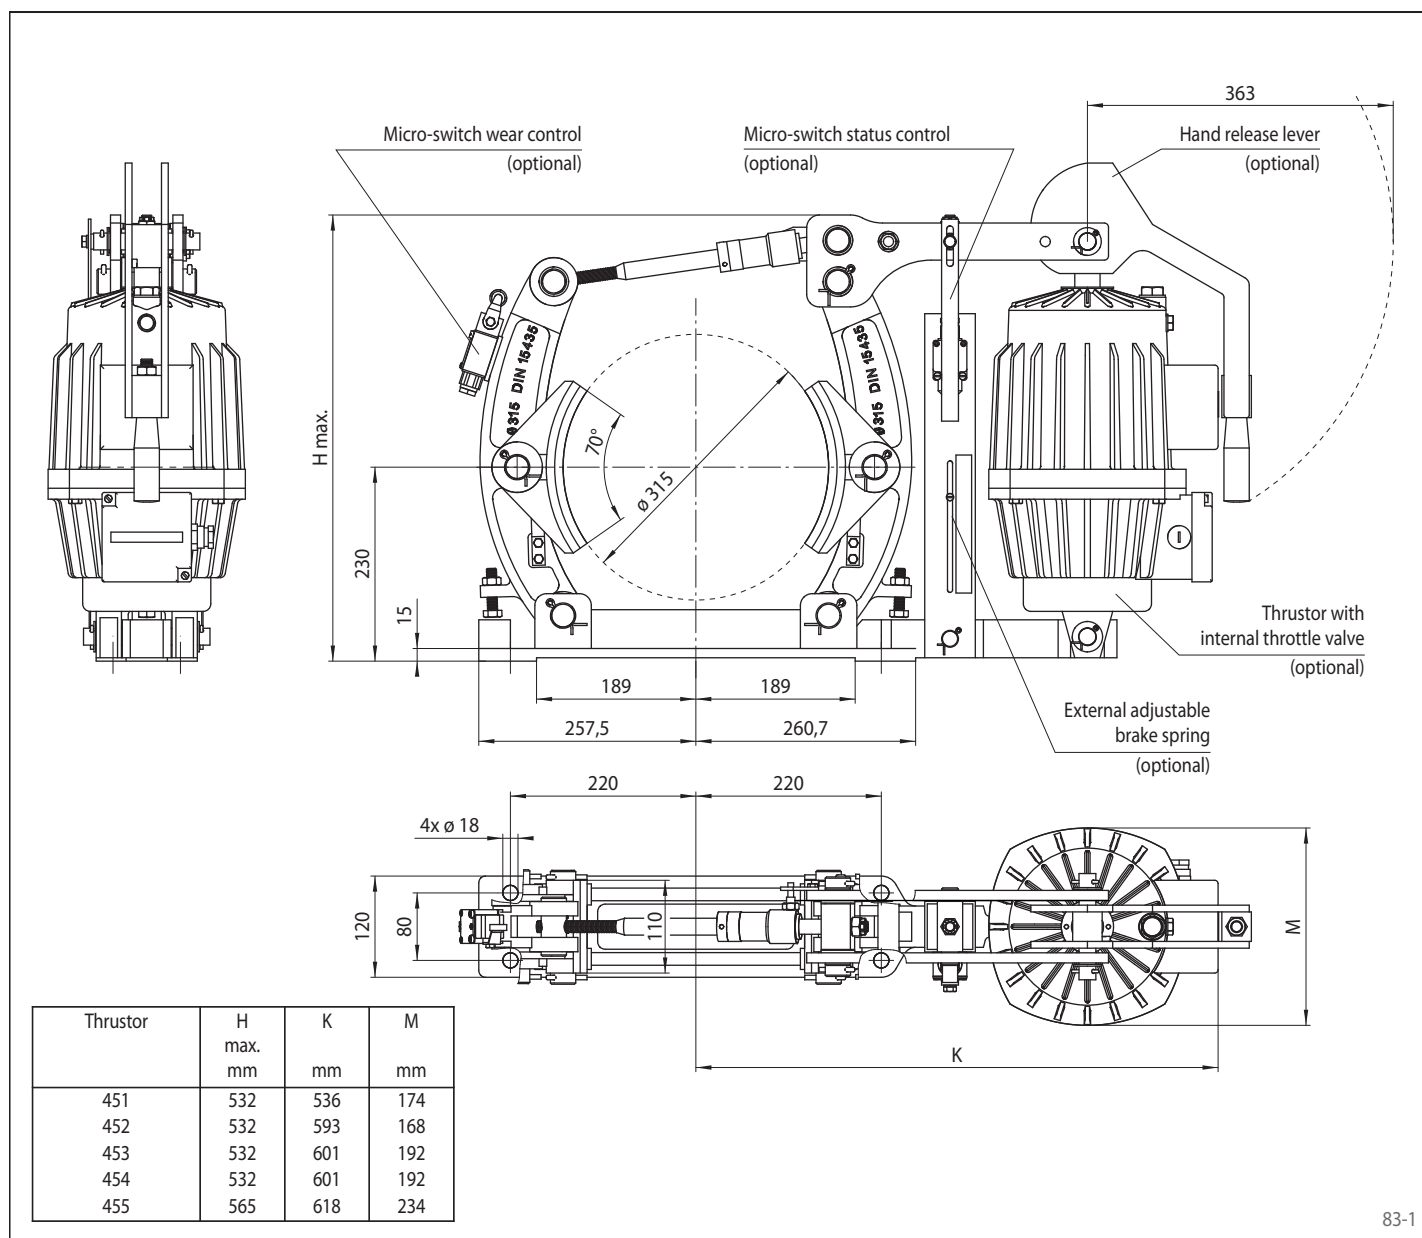

Options

- External adjustable brake spring
- Micro-switch wear control
- Micro-switch status control
- Hand release lever
- Thrustor with internal throttle valve
- Thrustor in heat resistant design
- Corrosion protected design
- Wider brake shoes and brake drums

Brake Caliper DT 315 FEA ... NC

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

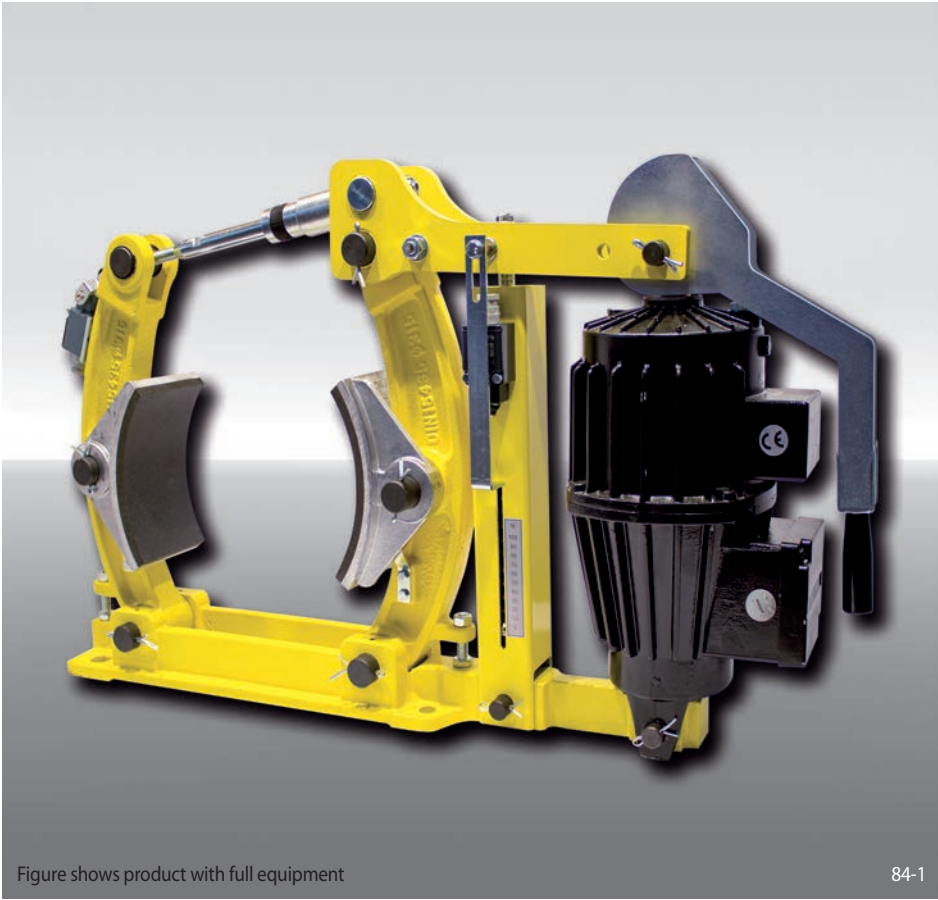


Figure shows product with full equipment

84-1

Features	Code
Brake Caliper	D
Drum Brake	T
Frame size 315	315
Spring activated	F
Electrohydraulically released	E
Automatic adjustment to accommodate friction block wear	A
Thrustors 451, 452, 453, 454 or 455 are available	451 to 455
Material: cast	NC

Example for ordering

Brake Caliper DT 315 FEA, thrustor 453, material: cast

DT 315 FEA - 453 - NC


Technical Data

	Brake Caliper DT 315 FEA ... NC				
	with thrustor 451	with thrustor 452	with thrustor 453	with thrustor 454	with thrustor 455
Brake drum diameter	Braking torque	Braking torque	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm	Nm	Nm
315	285	425	850	1070	1700
Clamping force	2300 N	3400 N	6700 N	8500 N	13500 N
Braking torque adjustable (optional)	20 - 100%	20 - 100%	20 - 100%	20 - 100%	20 - 100%
Nominal power	130 W	180 W	240 W	280 W	370 W
Oil volume	1,4 l	2,5 l	3,5 l	3,5 l	4,5 l
Voltage	230/400 V	230/400 V	230/400 V	230/400 V	230/400 V
Weight	49 kg	54 kg	56 kg	56 kg	62 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Brake Caliper DT 315 FEA ... NC

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

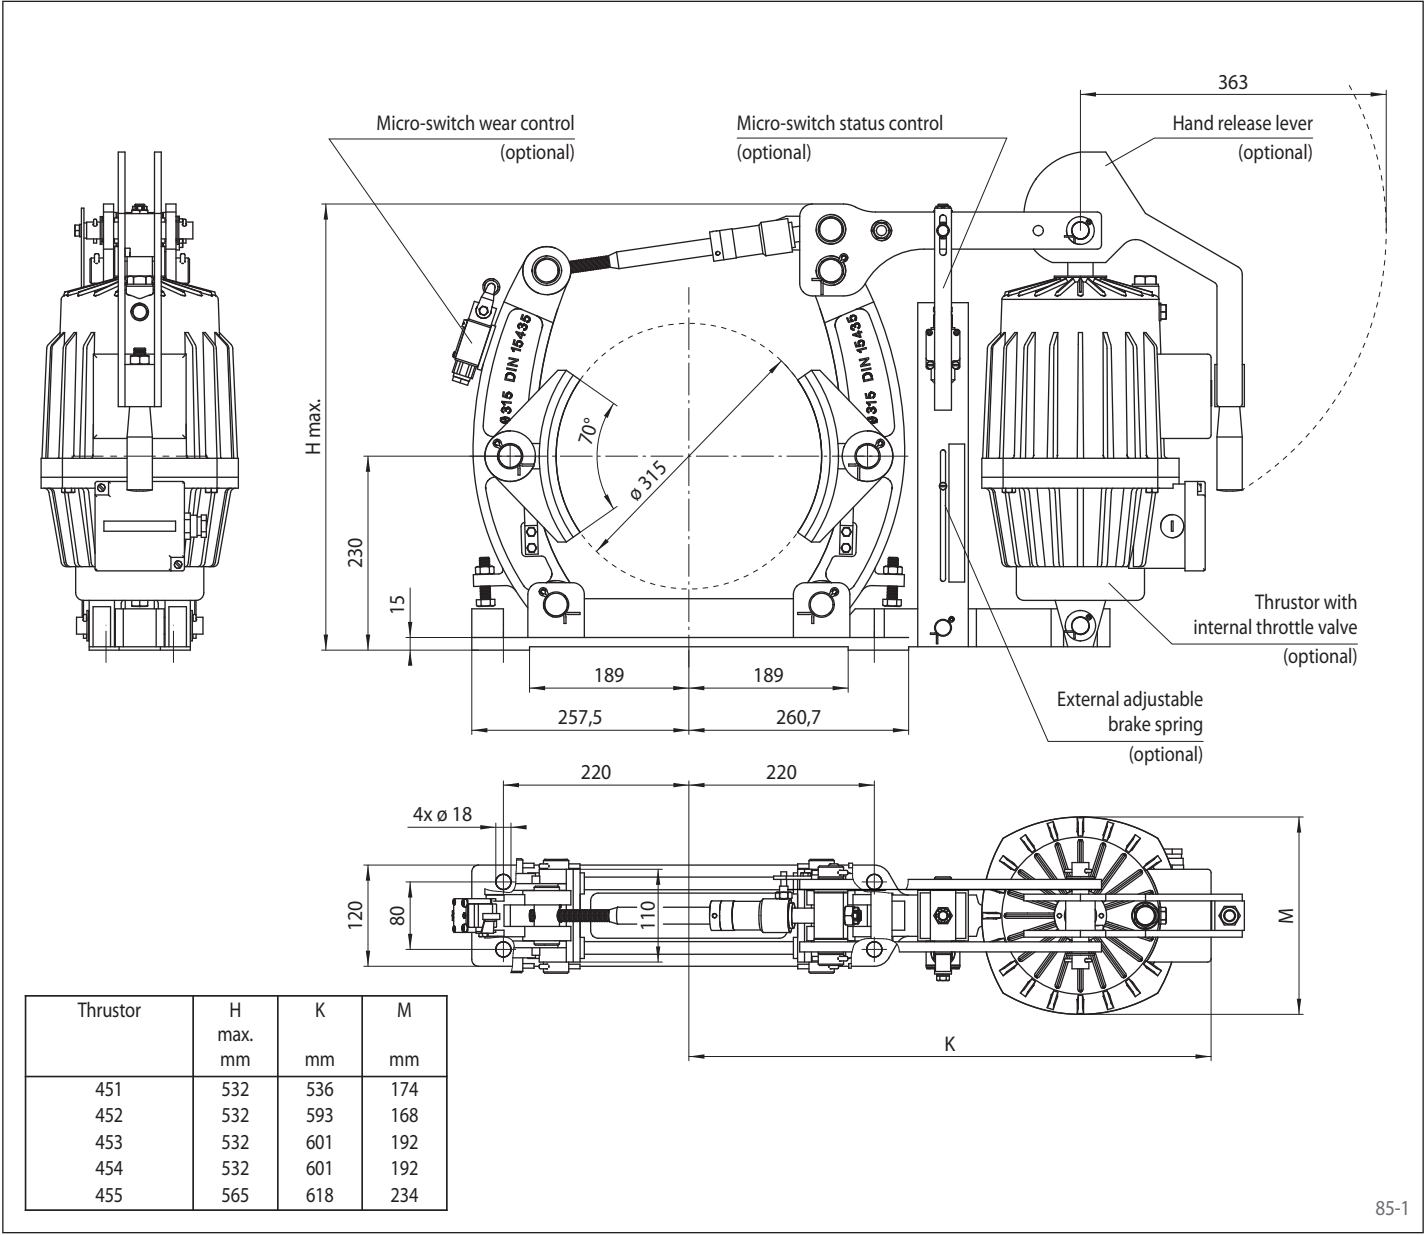


Options

- External adjustable brake spring
- Micro-switch wear control
- Micro-switch status control
- Hand release lever
- Thrustor with internal throttle valve
- Thrustor in heat resistant design
- Corrosion protected design
- Wider brake shoes and brake drums

Brake Caliper DT 315 FEA ... ST

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

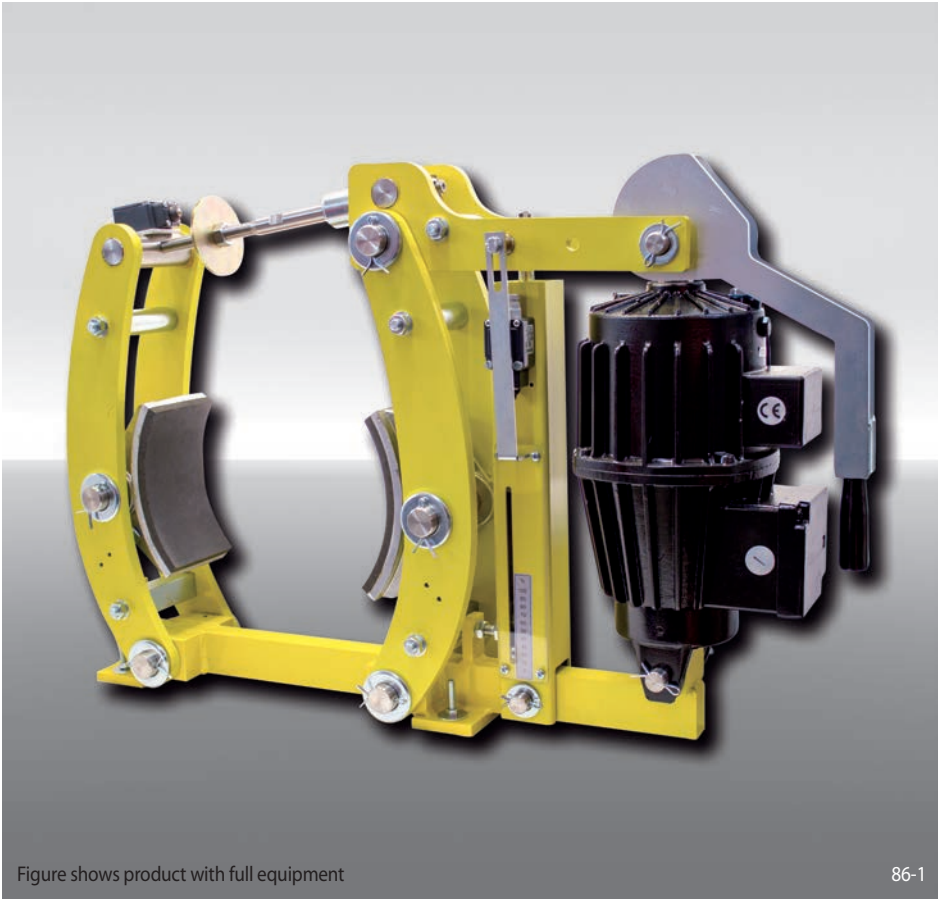

Features	Code
Brake Caliper	D
Drum Brake	T
Frame size 315	315
Spring activated	F
Electrohydraulically released	E
Automatic adjustment to accommodate friction block wear	A
Thrustors 451, 452, 453, 454 or 455 are available	451 to 455
Material: steel	ST

Example for ordering

Brake Caliper DT 315 FEA, thrustor 453, material: steel

DT 315 FEA - 453 - ST


Technical Data

	Brake Caliper DT 315 FEA ... ST			
	with thrustor 451	with thrustor 452	with thrustor 453	with thrustor 455
Brake drum diameter	Braking torque	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm	Nm
315	350	480	950	1800
Clamping force	2800 N	3800 N	7500 N	14300 N
Braking torque adjustable	20 - 100%	20 - 100%	20 - 100%	20 - 100%
Nominal power	130 W	180 W	240 W	370 W
Oil volume	1,4 l	2,5 l	3,5 l	4,5 l
Voltage	230/400 V	230/400 V	230/400 V	230/400 V
Weight	56 kg	61 kg	63 kg	69 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Brake Caliper DT 315 FEA ... ST

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

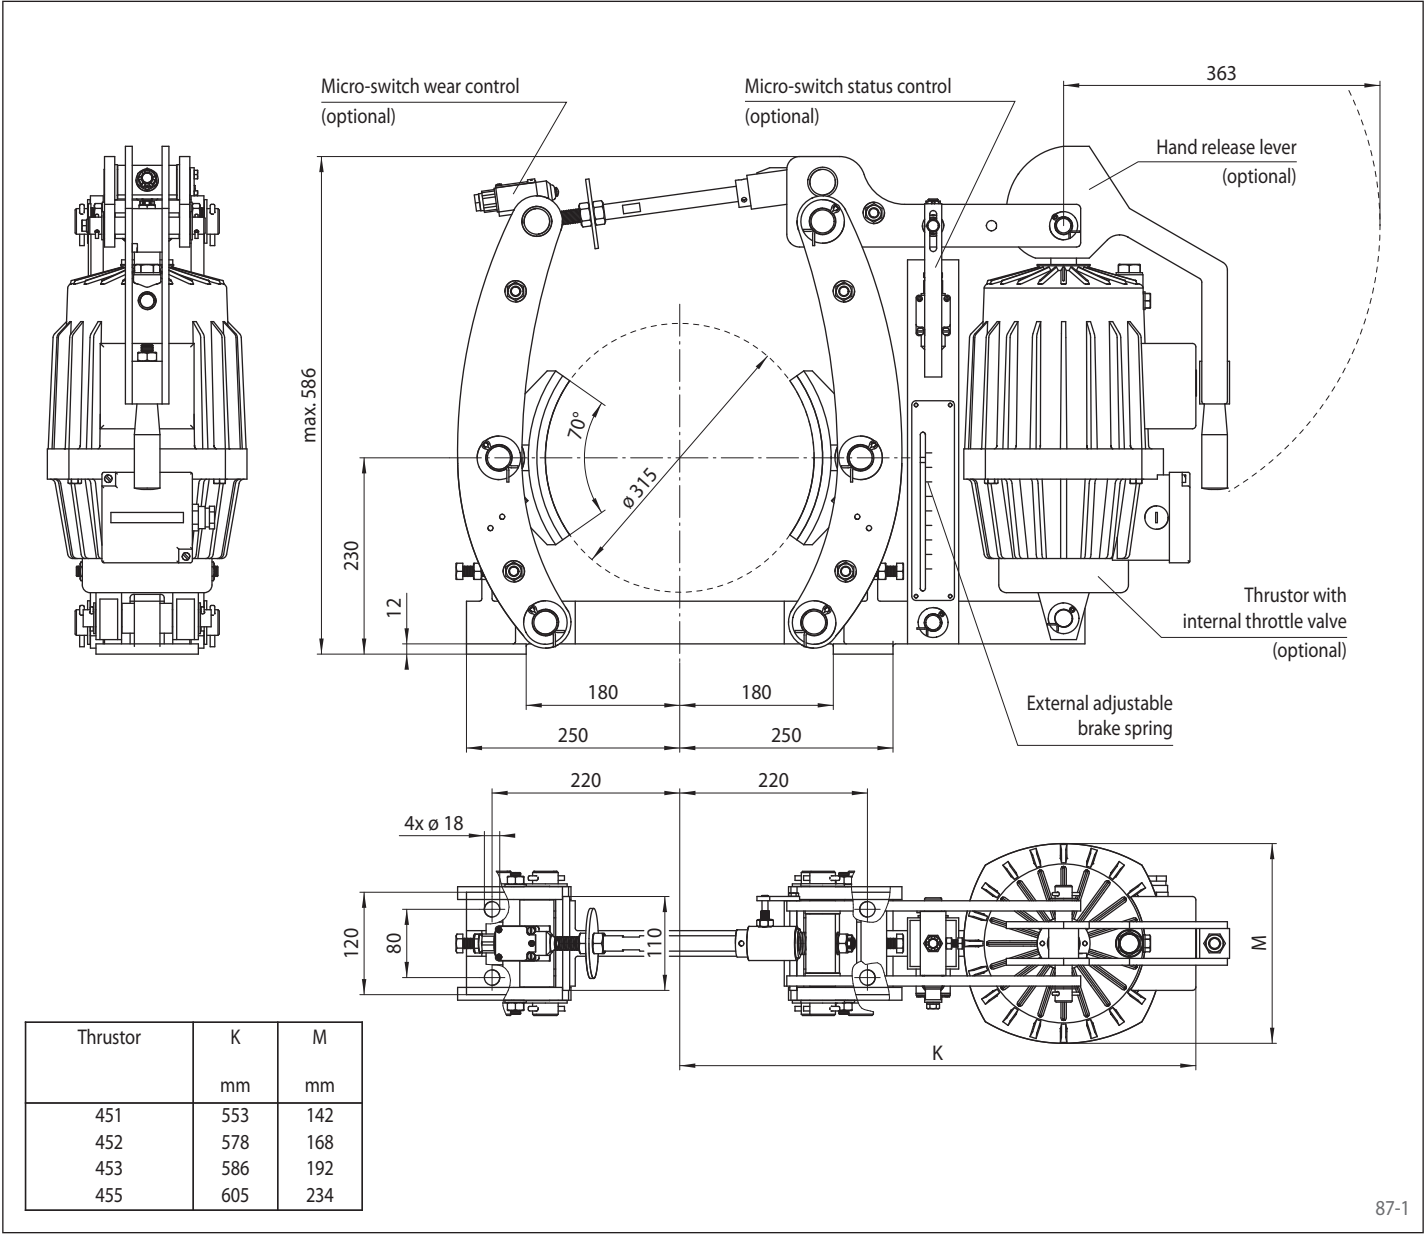

Options

- Micro-switch wear control
- Micro-switch status control
- Hand release lever
- Thrustor with internal throttle valve
- Thrustor in heat resistant design
- Corrosion protected design
- Wider brake shoes and brake drums

Brake Caliper DT 400 FEM ... NC

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

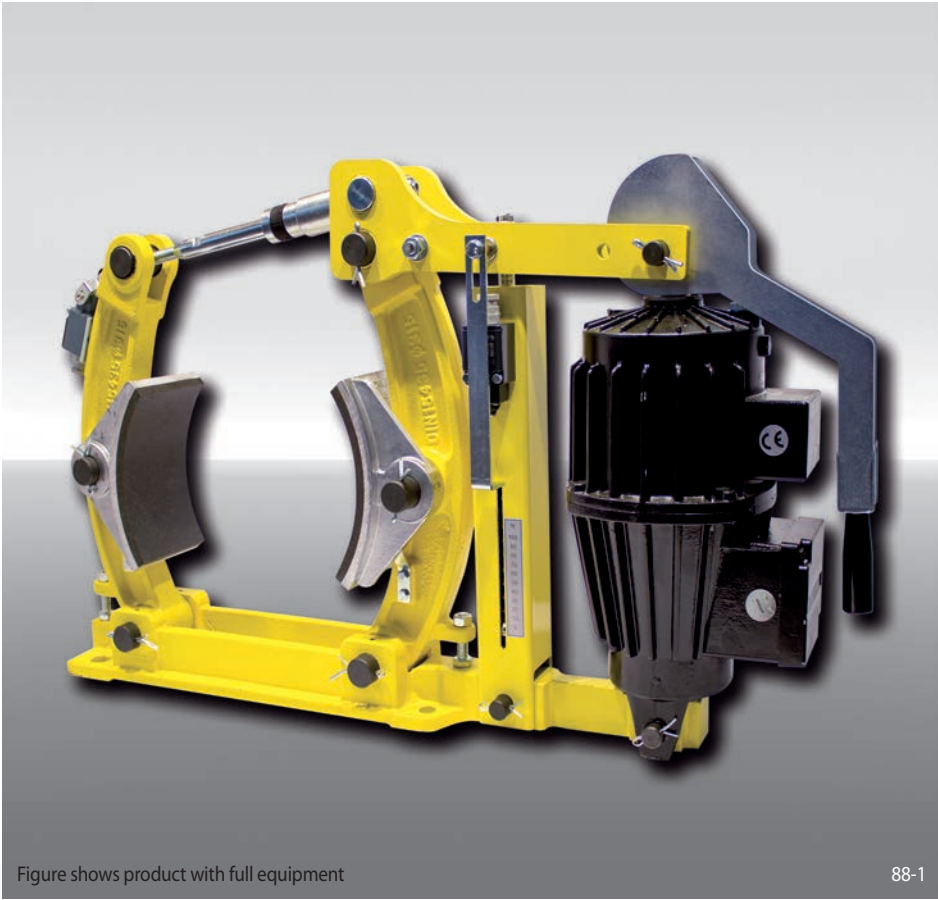


Figure shows product with full equipment

88-1

Features	Code
Brake Caliper	D
Drum Brake	T
Frame size 400	400
Spring activated	F
Electrohydraulically released	E
Manual adjustment to accommodate friction block wear	M
Thrustors 452, 453, 454 or 455 are available	452 to 455
Material: cast	NC

Example for ordering

Brake Caliper DT 400 FEM, thrustor 453, material: cast

DT 400 FEM - 453 - NC


Technical Data

	Brake Caliper DT 400 FEM ... NC			
	with thrustor 452	with thrustor 453	with thrustor 454	with thrustor 455
Brake drum diameter	Braking torque	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm	Nm
400	525	1 040	1 300	2 075
Clamping force	3 300 N	6 500 N	8 100 N	13 000 N
Braking torque adjustable (optional)	20 - 100%	20 - 100%	20 - 100%	20 - 100%
Nominal power	180 W	240 W	280 W	370 W
Oil volume	2,5 l	3,5 l	3,5 l	4,5 l
Voltage	230/400 V	230/400 V	230/400 V	230/400 V
Weight	80 kg	82 kg	82 kg	88 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Brake Caliper DT 400 FEM ... NC

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

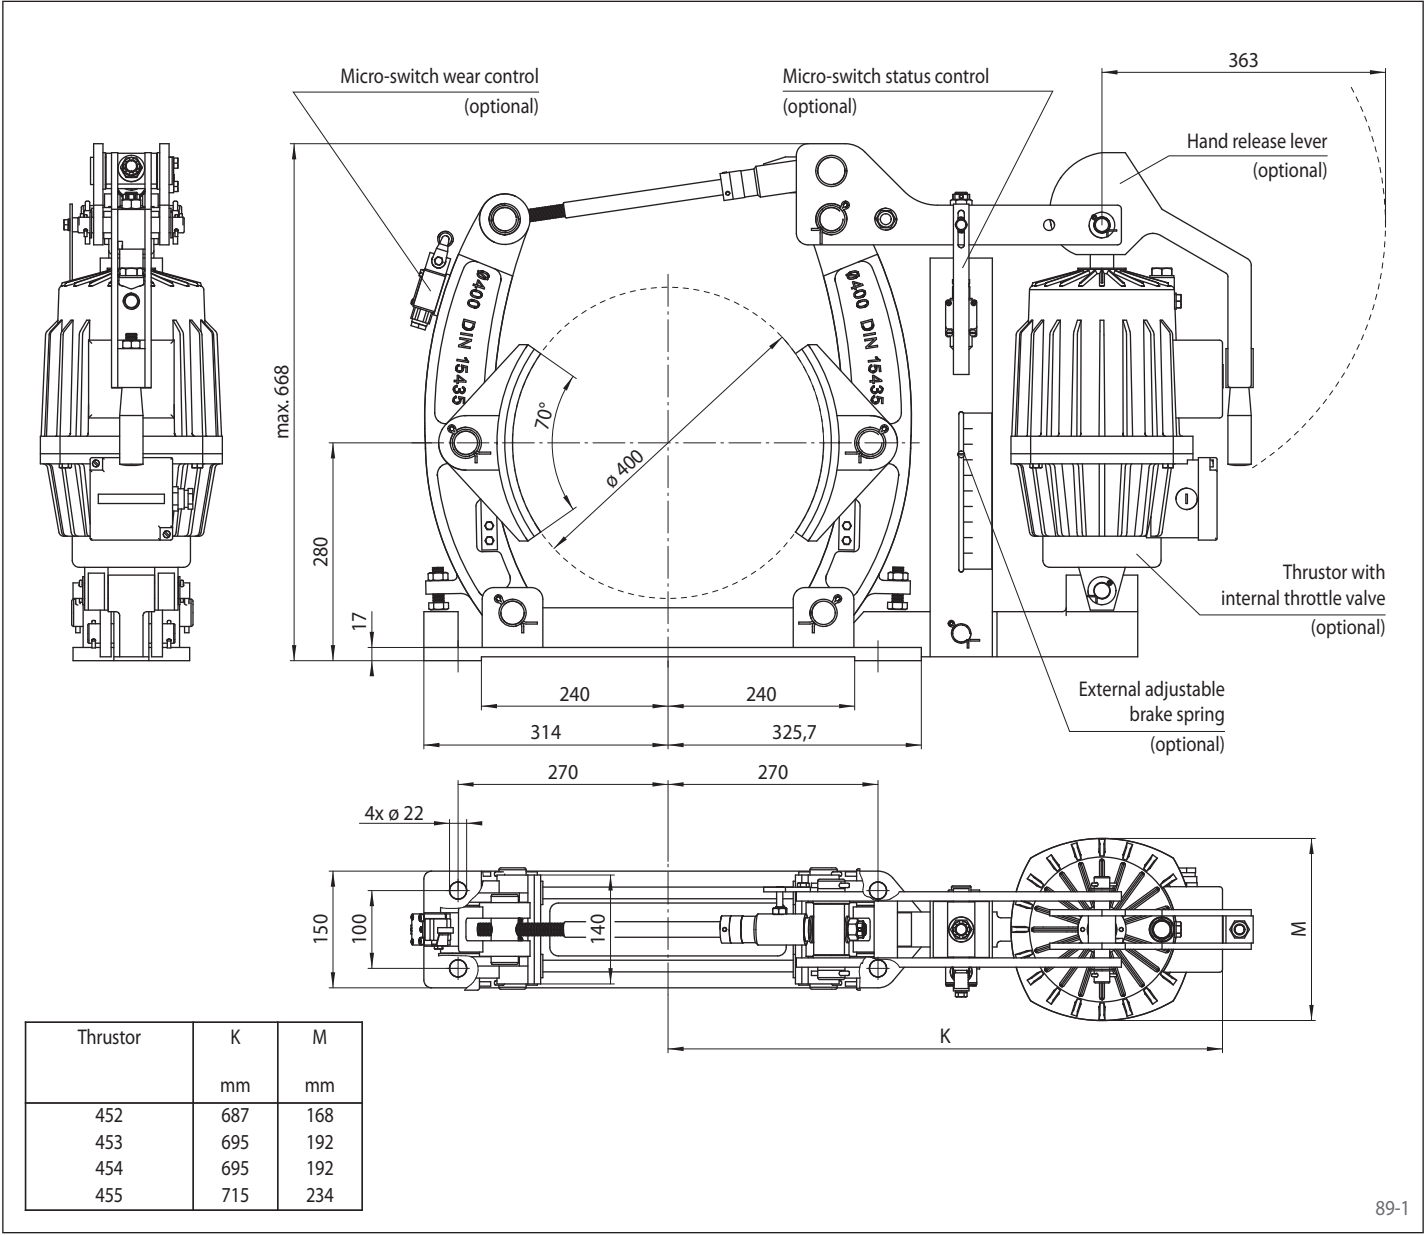

Options

- External adjustable brake spring
- Micro-switch wear control
- Micro-switch status control
- Hand release lever
- Thrustor with internal throttle valve
- Thrustor in heat resistant design
- Corrosion protected design
- Wider brake shoes and brake drums

Brake Caliper DT 400 FEA ... NC

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

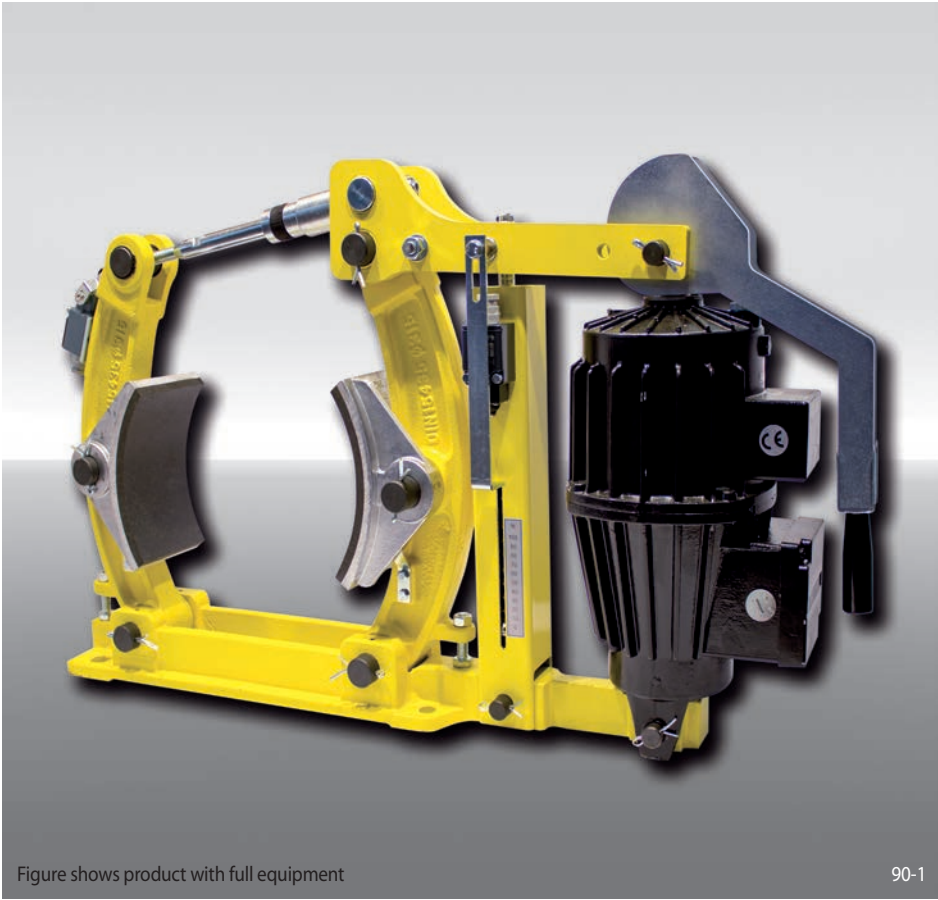


Figure shows product with full equipment

90-1

Features	Code
Brake Caliper	D
Drum Brake	T
Frame size 400	400
Spring activated	F
Electrohydraulically released	E
Automatic adjustment to accommodate friction block wear	A
Thrustors 452, 453, 454 or 455 are available	452 to 455
Material: cast	NC

Example for ordering

Brake Caliper DT 400 FEA, thrustor 453, material: cast

DT 400 FEA - 453 - NC


Technical Data

	Brake Caliper DT 400 FEA ... NC			
	with thrustor 452	with thrustor 453	with thrustor 454	with thrustor 455
Brake drum diameter	Braking torque	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm	Nm
400	525	1 040	1 300	2 075
Clamping force	3 300 N	6 500 N	8 100 N	13 000 N
Braking torque adjustable (optional)	20 - 100%	20 - 100%	20 - 100%	20 - 100%
Nominal power	180 W	240 W	280 W	370 W
Oil volume	2,5 l	3,5 l	3,5 l	4,5 l
Voltage	230/400 V	230/400 V	230/400 V	230/400 V
Weight	80 kg	82 kg	82 kg	88 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Brake Caliper DT 400 FEA ... NC

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

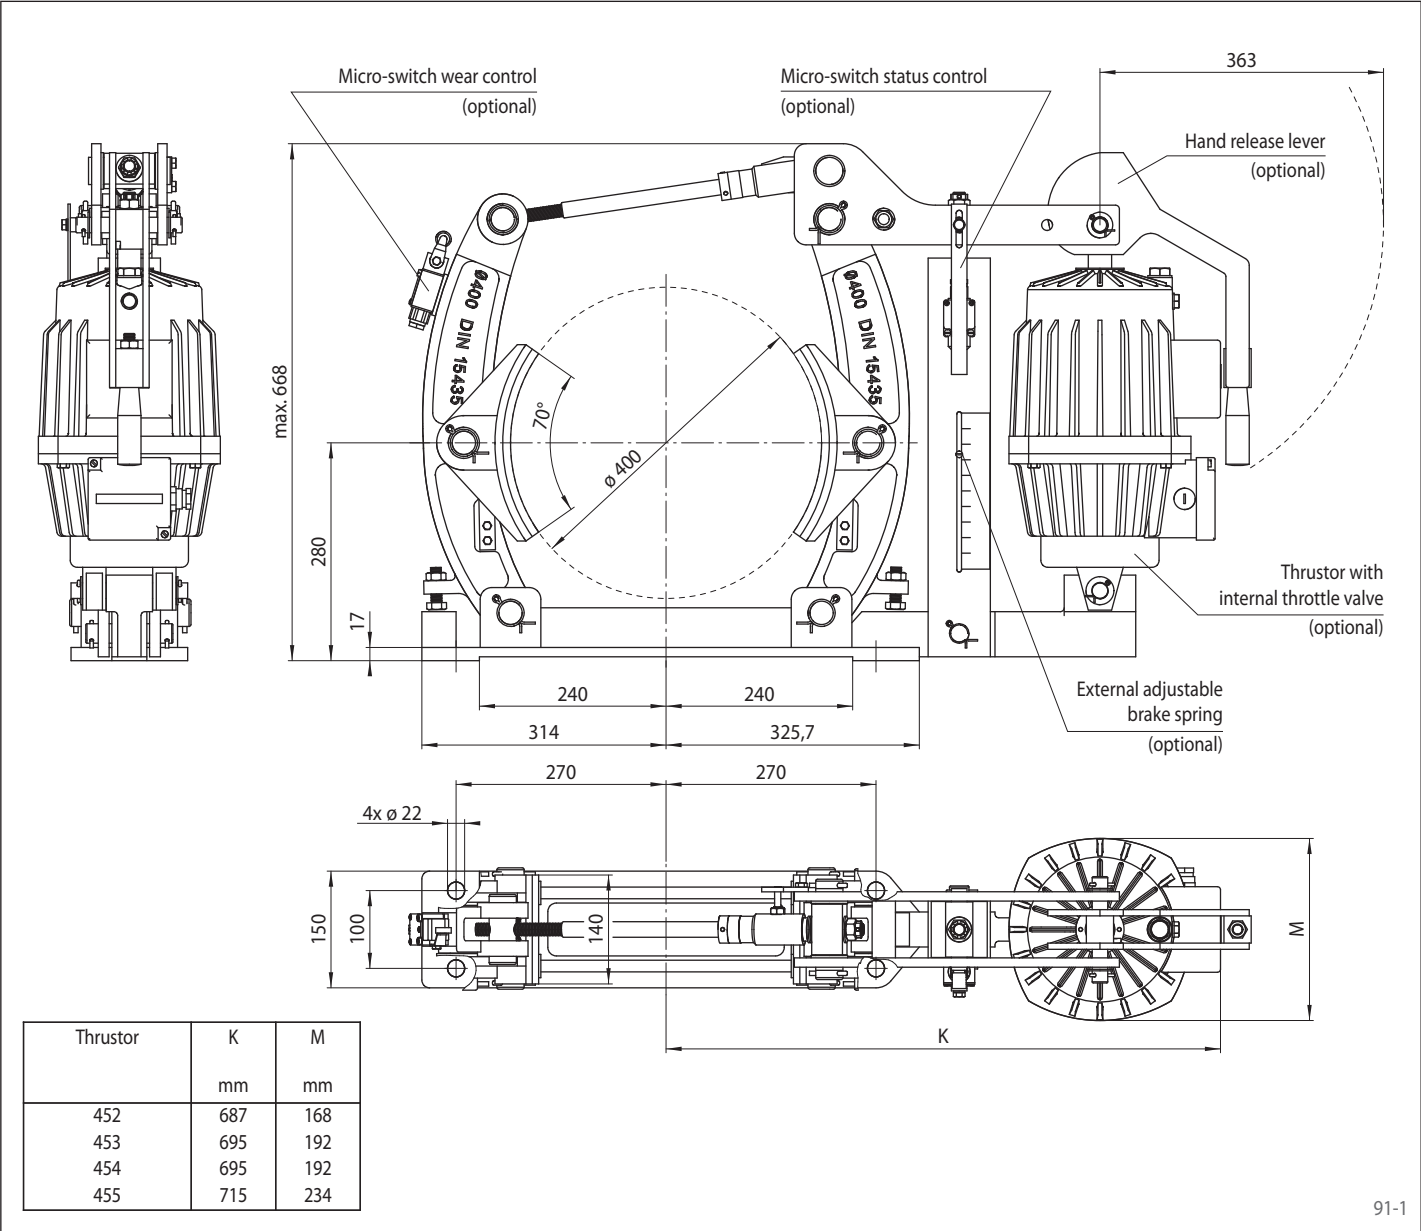

Options

- External adjustable brake spring
- Micro-switch wear control
- Micro-switch status control
- Hand release lever
- Thrustor with internal throttle valve
- Thrustor in heat resistant design
- Corrosion protected design
- Wider brake shoes and brake drums

Brake Caliper DT 400 FEA ... ST

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

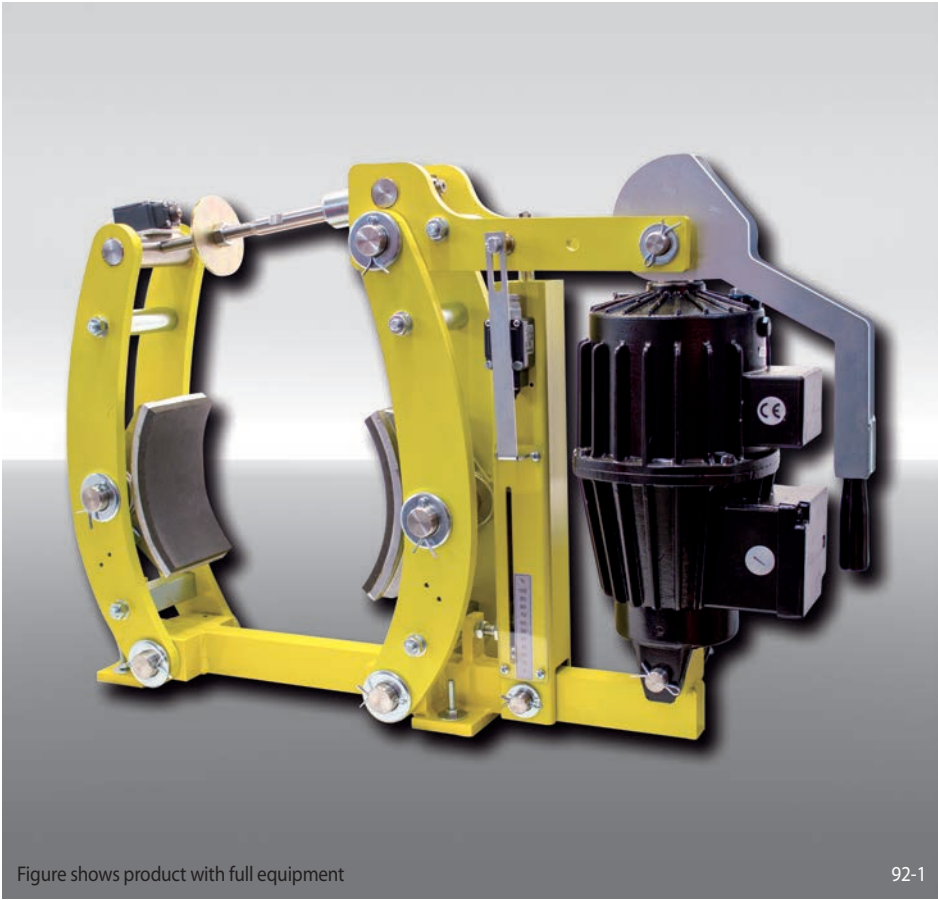


Figure shows product with full equipment

92-1

Features	Code
Brake Caliper	D
Drum Brake	T
Frame size 400	400
Spring activated	F
Electrohydraulically released	E
Automatic adjustment to accommodate friction block wear	A
Thrustors 452, 453 or 455 are available	452 453 455
Material: steel	ST

Example for ordering

Brake Caliper DT 400 FEA, thrustor 453, material: steel

DT 400 FEA - 453 - ST


Technical Data

	Brake Caliper DT 400 FEA ... ST		
	with thrustor 452	with thrustor 453	with thrustor 455
Brake drum diameter	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm
400	680	1 300	2 500
Clamping force	4 200 N	8 100 N	15 600 N
Braking torque adjustable	20 - 100%	20 - 100%	20 - 100%
Nominal power	180 W	240 W	370 W
Oil volume	2,5 l	3,5 l	4,5 l
Voltage	230/400 V	230/400 V	230/400 V
Weight	98 kg	100 kg	106 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

RINGSPANN®

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

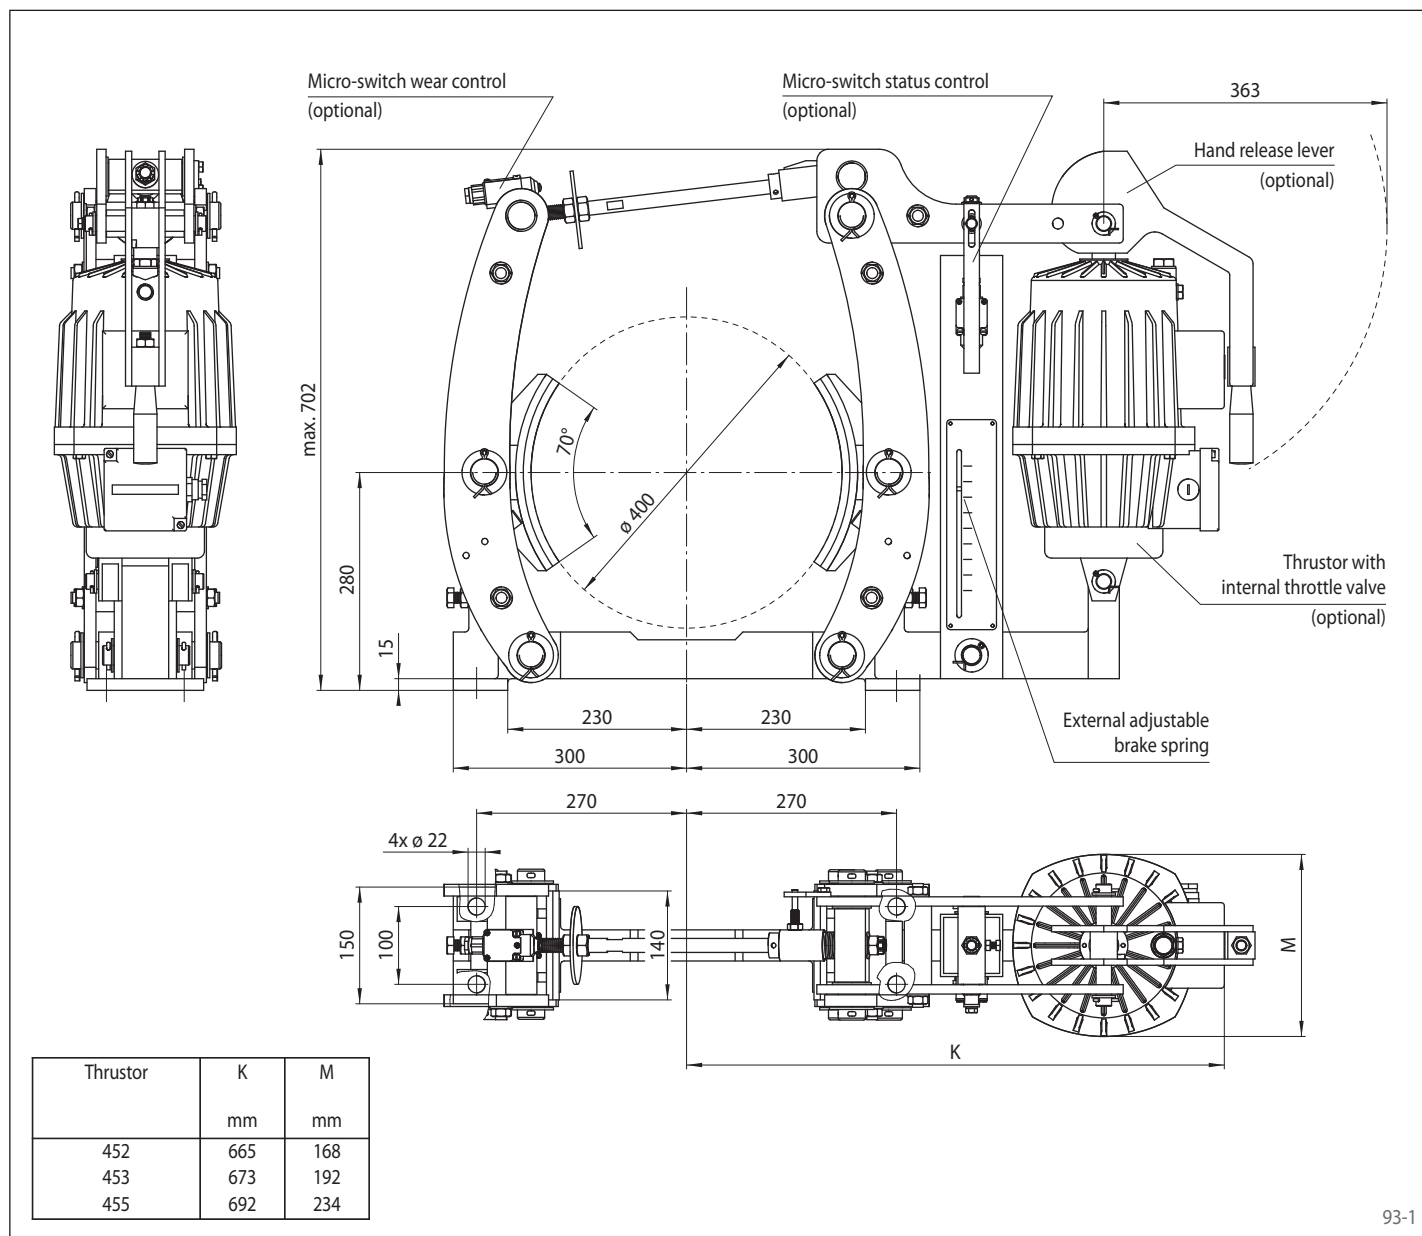

Options

- Micro-switch wear control
- Micro-switch status control
- Hand release lever
- Thrustor with internal throttle valve
- Thrustor in heat resistant design
- Corrosion protected design
- Wider brake shoes and brake drums

Brake Caliper DT 500 FEM ... NC

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

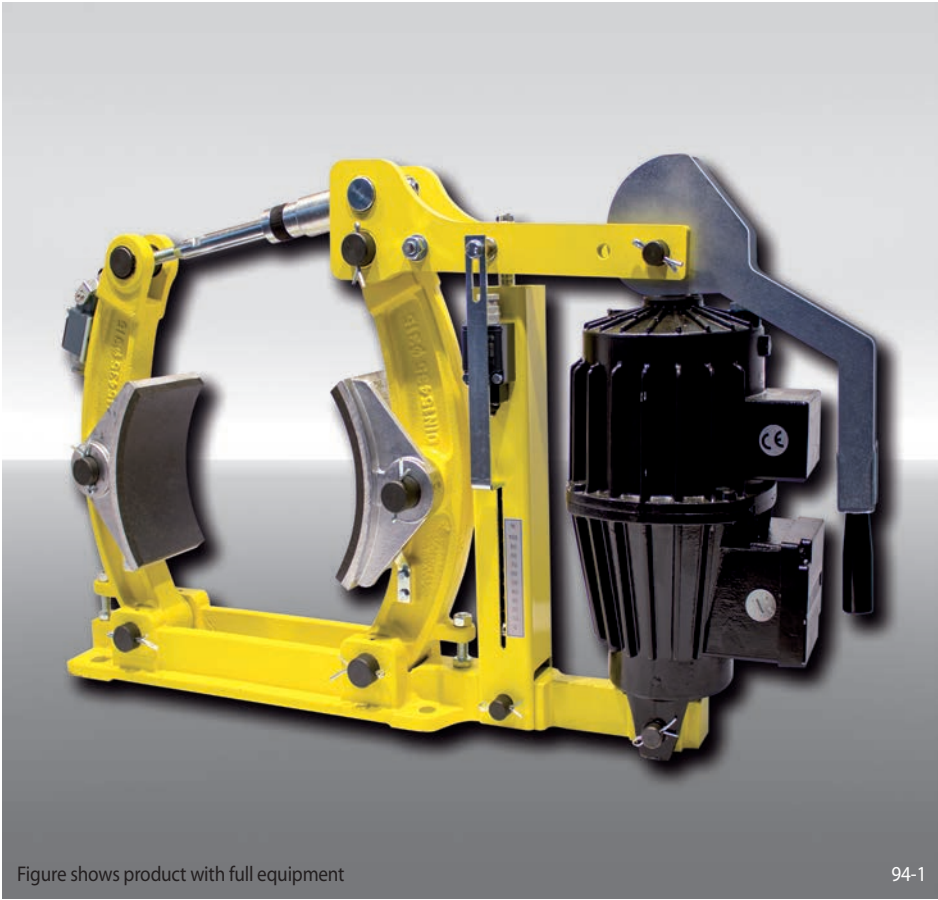


Figure shows product with full equipment

94-1

Features	Code
Brake Caliper	D
Drum Brake	T
Frame size 500	500
Spring activated	F
Electrohydraulically released	E
Manual adjustment to accommodate friction block wear	M
Thrustors 455 or 456 are available	455 456
Material: cast	NC

Example for ordering

Brake Caliper DT 500 FEM, thrustor 456, material: cast


DT 500 FEM - 456 - NC

Technical Data

	Brake Caliper DT 500 FEM ... NC	
	with thrustor 455	with thrustor 456
Brake drum diameter	Braking torque	Braking torque
mm	Nm	Nm
500	2500	4170
Clamping force	12500 N	20800 N
Braking torque adjustable (optional)	20 - 100%	20 - 100%
Nominal power	370 W	590 W
Oil volume	4,5 l	11 l
Voltage	230/400 V	230/400 V
Weight	130 kg	156 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

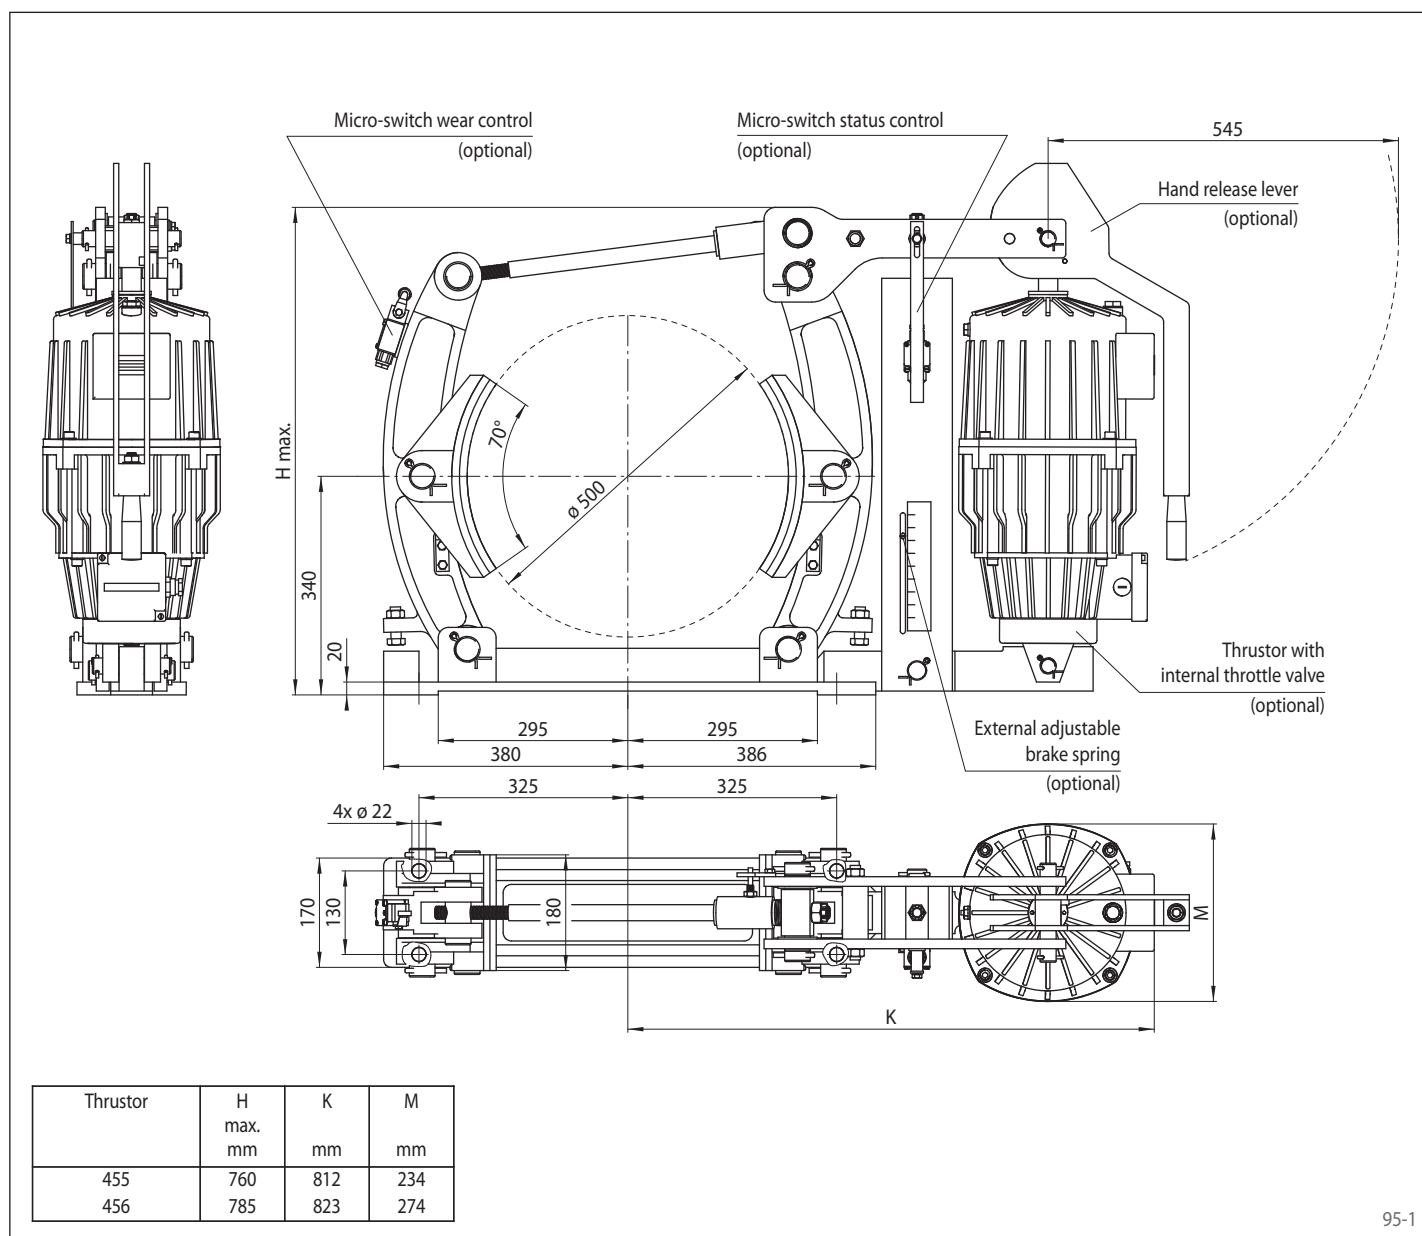

Options

- External adjustable brake spring
- Micro-switch wear control
- Micro-switch status control
- Hand release lever
- Thrustor with internal throttle valve
- Thrustor in heat resistant design
- Corrosion protected design
- Wider brake shoes and brake drums

Brake Caliper DT 500 FEA ... NC

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

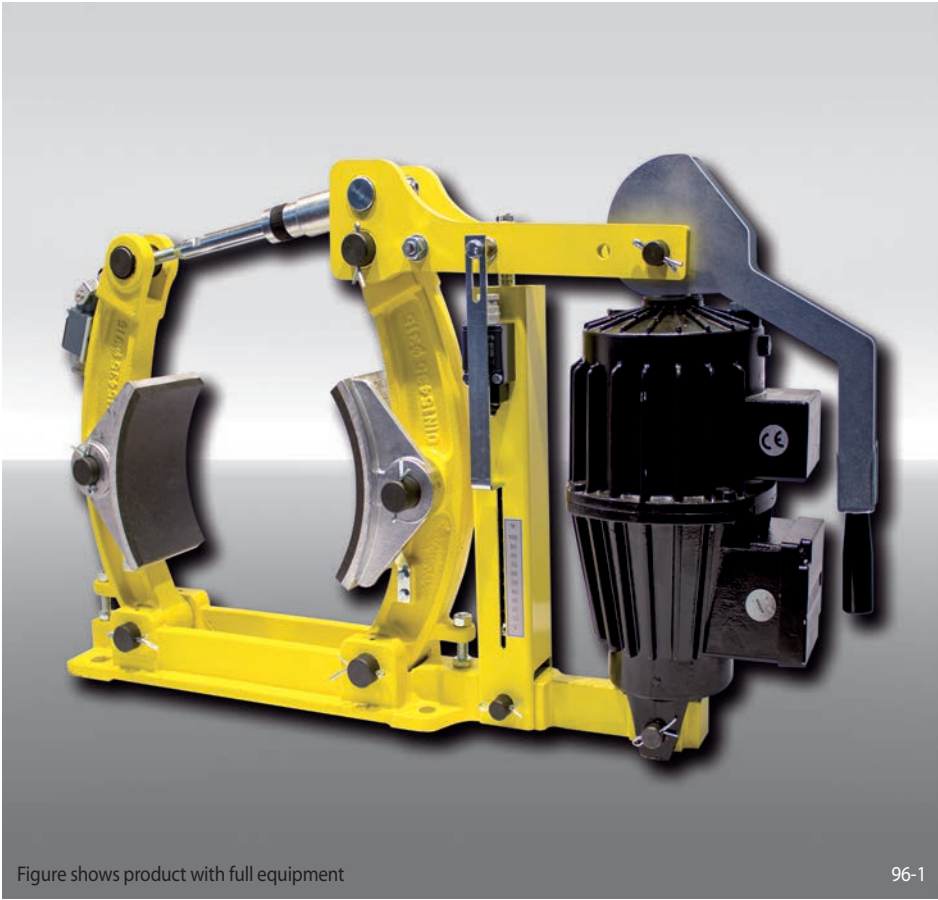


Figure shows product with full equipment

96-1

Features	Code
Brake Caliper	D
Drum Brake	T
Frame size 500	500
Spring activated	F
Electrohydraulically released	E
Automatic adjustment to accommodate friction block wear	A
Thrustors 455 or 456 are available	455 456
Material: cast	NC

Example for ordering

Brake Caliper DT 500 FEA, thrustor 456, material: cast

DT 500 FEA - 456 - NC


Technical Data

	Brake Caliper DT 500 FEA ... NC	
	with thrustor 455	with thrustor 456
Brake drum diameter	Braking torque	Braking torque
mm	Nm	Nm
500	2500	4170
Clamping force	12500 N	20800 N
Braking torque adjustable (optional)	20 - 100%	20 - 100%
Nominal power	370 W	590 W
Oil volume	4,5 l	11 l
Voltage	230/400 V	230/400 V
Weight	130 kg	156 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Brake Caliper DT 500 FEA ... NC

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

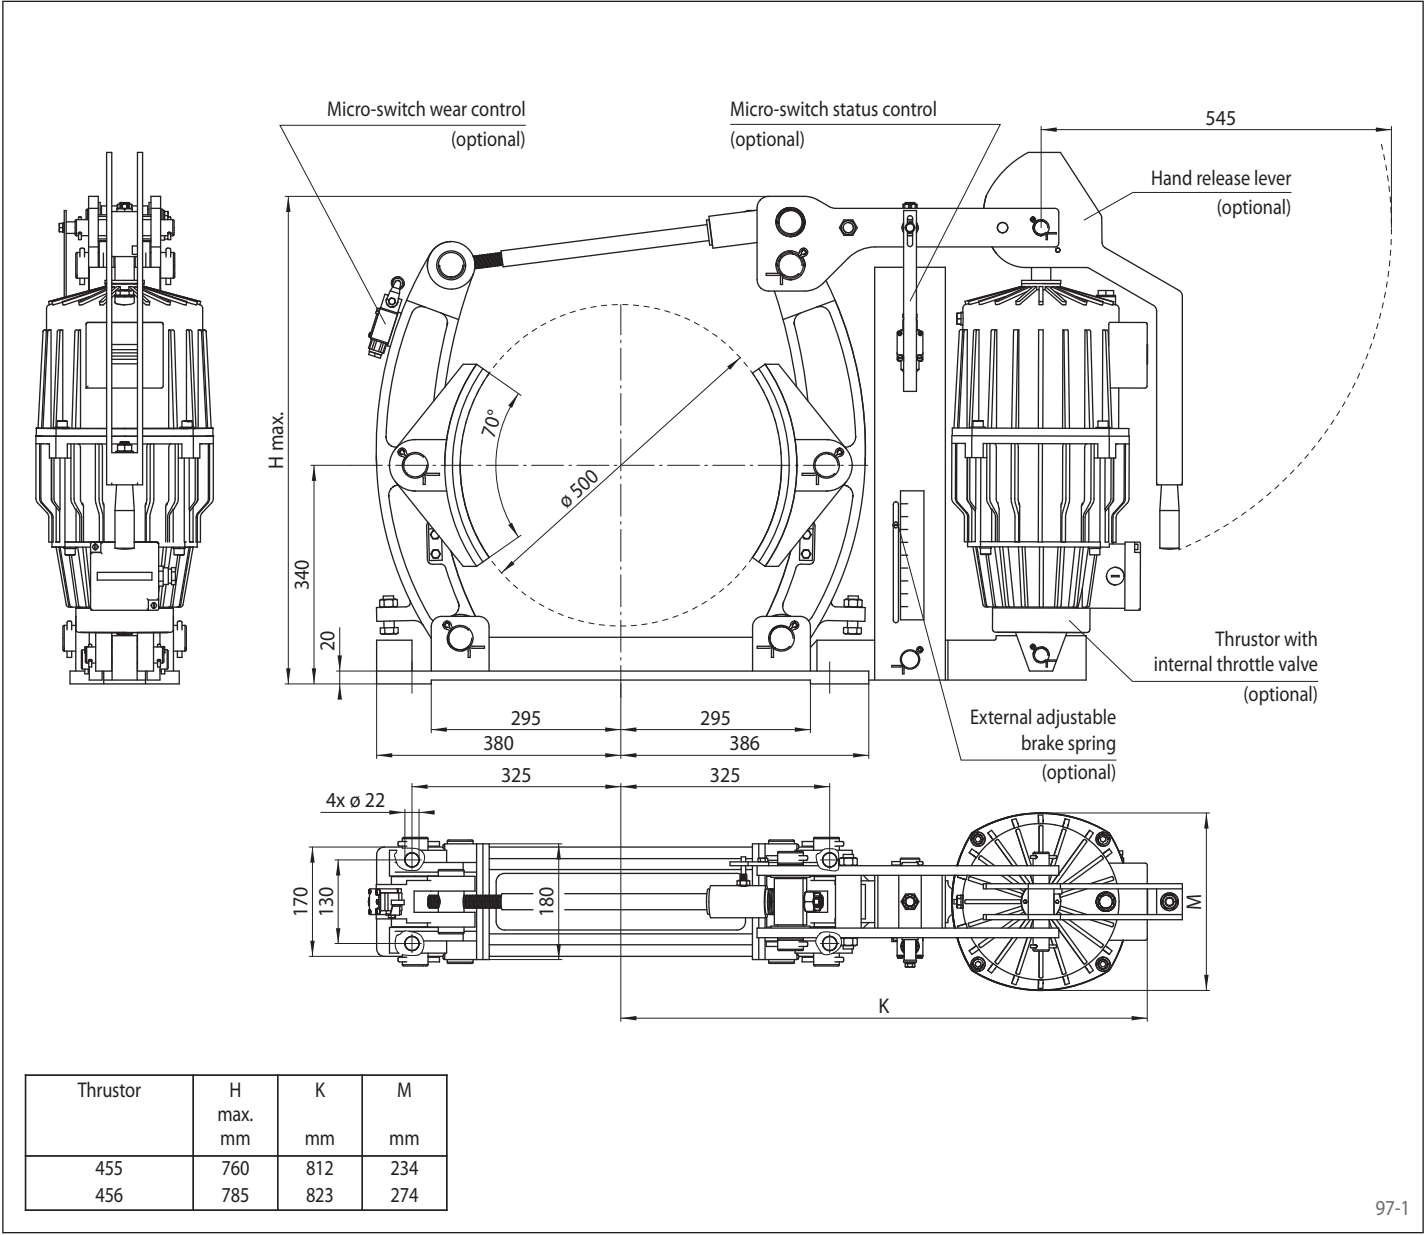

Options

- External adjustable brake spring
- Micro-switch wear control
- Micro-switch status control
- Hand release lever
- Thrustor with internal throttle valve
- Thrustor in heat resistant design
- Corrosion protected design
- Wider brake shoes and brake drums

Brake Caliper DT 500 FEA ... ST

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

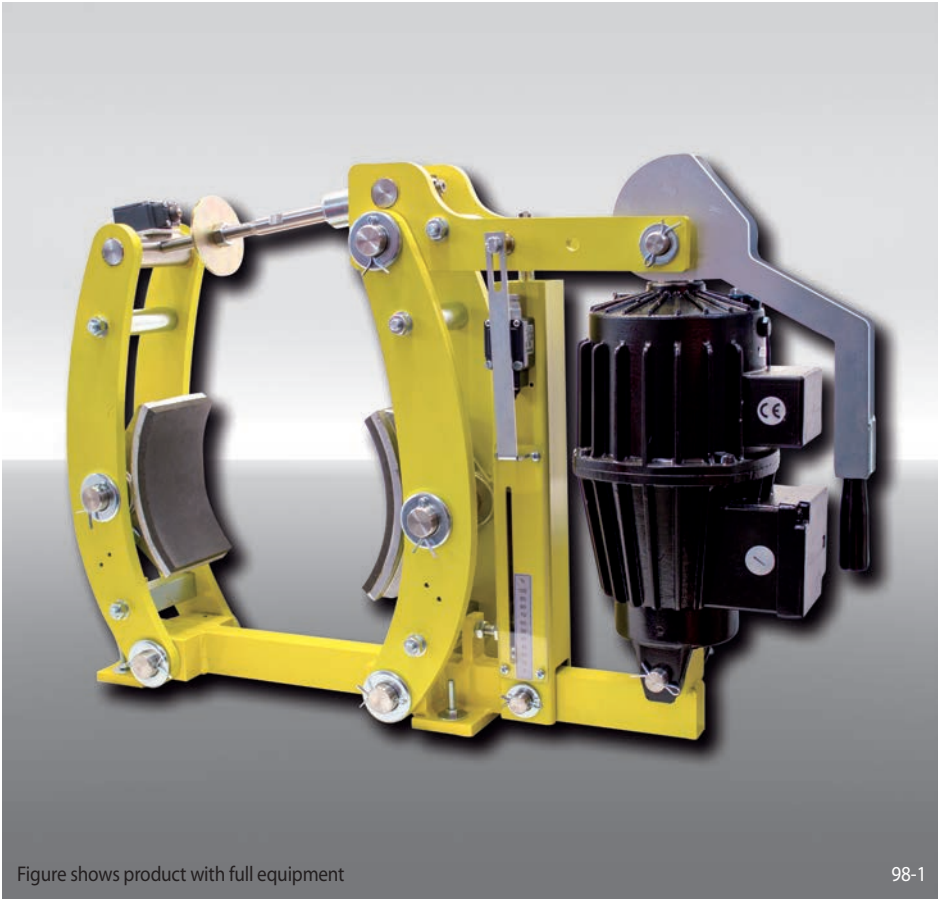


Figure shows product with full equipment

98-1

Features	Code
Brake Caliper	D
Drum Brake	T
Frame size 500	500
Spring activated	F
Electrohydraulically released	E
Automatic adjustment to accommodate friction block wear	A
Thrustors 453, 455 or 456 are available	453 455 456
Material: steel	ST

Example for ordering

Brake Caliper DT 500 FEA, thrustor 456, material: steel

DT 500 FEA - 456 - ST

Technical Data

	Brake Caliper DT 500 FEA ... ST		
	with thrustor 453	with thrustor 455	with thrustor 456
Brake drum diameter	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm
500	1 600	3 100	5 120
Clamping force	8 000 N	15 500 N	25 600 N
Braking torque adjustable	20 - 100%	20 - 100%	20 - 100%
Nominal power	240 W	370 W	590 W
Oil volume	3,5 l	4,5 l	11 l
Voltage	230/400 V	230/400 V	230/400 V
Weight	165 kg	171 kg	197 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

RINGSPANN®


Drum Brake according to DIN 15 435



- Micro-switch wear control
- Micro-switch status control
- Hand release lever
- Thrustor with internal throttle valve
- Thrustor in heat resistant design
- Corrosion protected design
- Wider brake shoes and brake drums

Brake Caliper DT 630 FEA ... ST

spring activated – electrohydraulically released
Drum Brake according to DIN 15 435

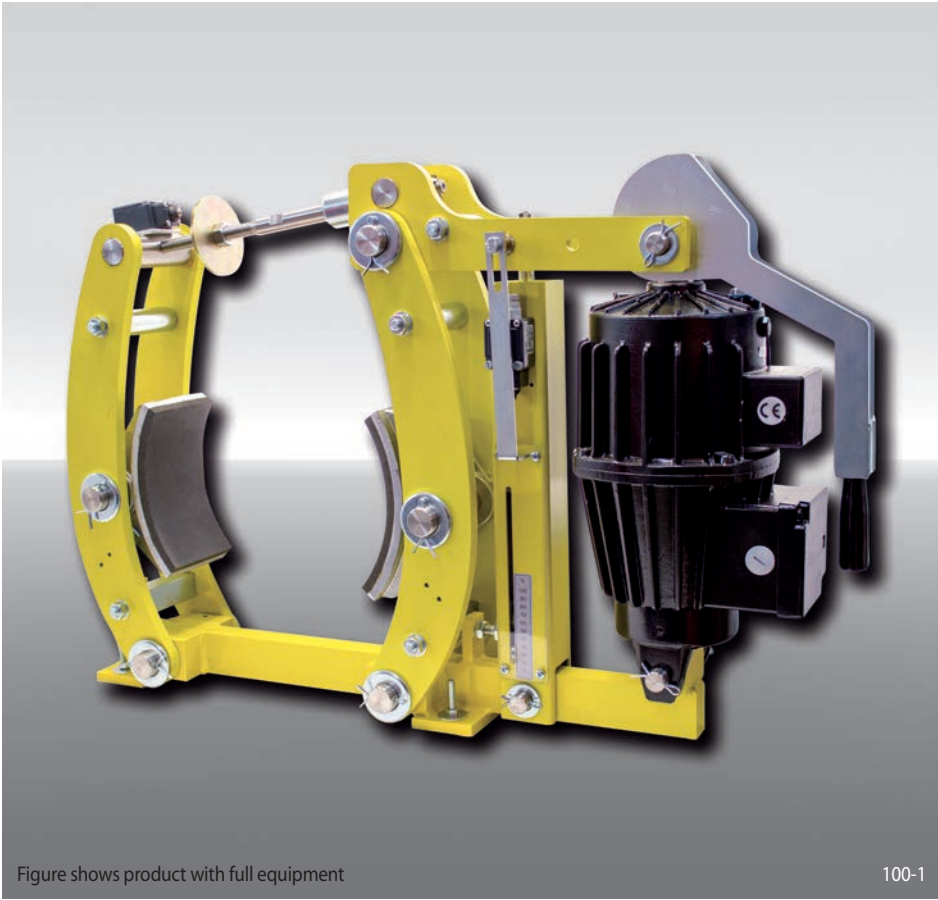

Features	Code
Brake Caliper	D
Drum Brake	T
Frame size 630	630
Spring activated	F
Electrohydraulically released	E
Automatic adjustment to accommodate friction block wear	A
Thrustors 455, 456 or 457 are available	455 456 457
Material: steel	ST

Example for ordering

Brake Caliper DT 630 FEA, thrustor 457, material: steel

DT 630 FEA - 457 - ST


Technical Data

	Brake Caliper DT 630 FEA ... ST		
	with thrustor 455	with thrustor 456	with thrustor 457
Brake drum diameter	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm
630	3 100	5 000	7 200
Clamping force	12 300 N	19 800 N	28 600 N
Braking torque adjustable	20 - 100%	20 - 100%	20 - 100%
Nominal power	370 W	590 W	680 W
Oil volume	4,5 l	11 l	11 l
Voltage	230/400 V	230/400 V	230/400 V
Weight	231 kg	257 kg	259 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

RINGSPANN®

**spring activated – electrohydraulically released
Drum Brake according to DIN 15 435**

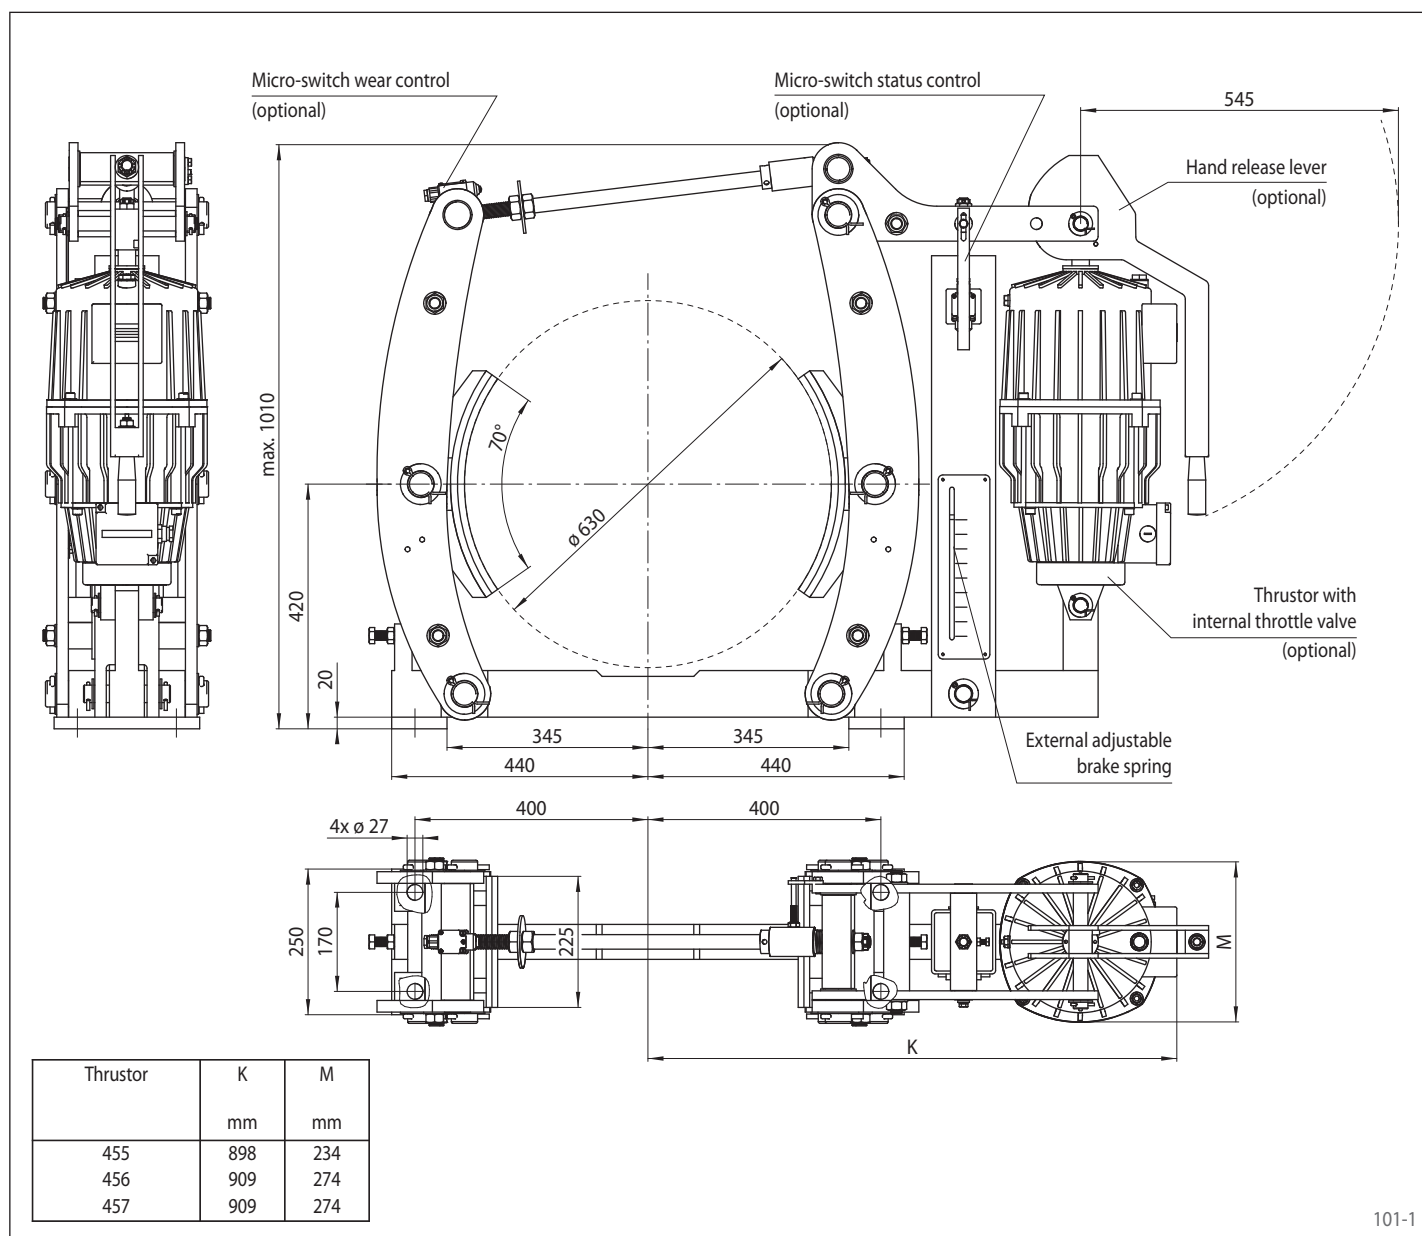


Options

- Micro-switch wear control
- Micro-switch status control
- Hand release lever
- Thrustor with internal throttle valve
- Thrustor in heat resistant design
- Corrosion protected design
- Wider brake shoes and brake drums

Brake Caliper DV 020 FKM

spring activated – manually released
by Pull Cable

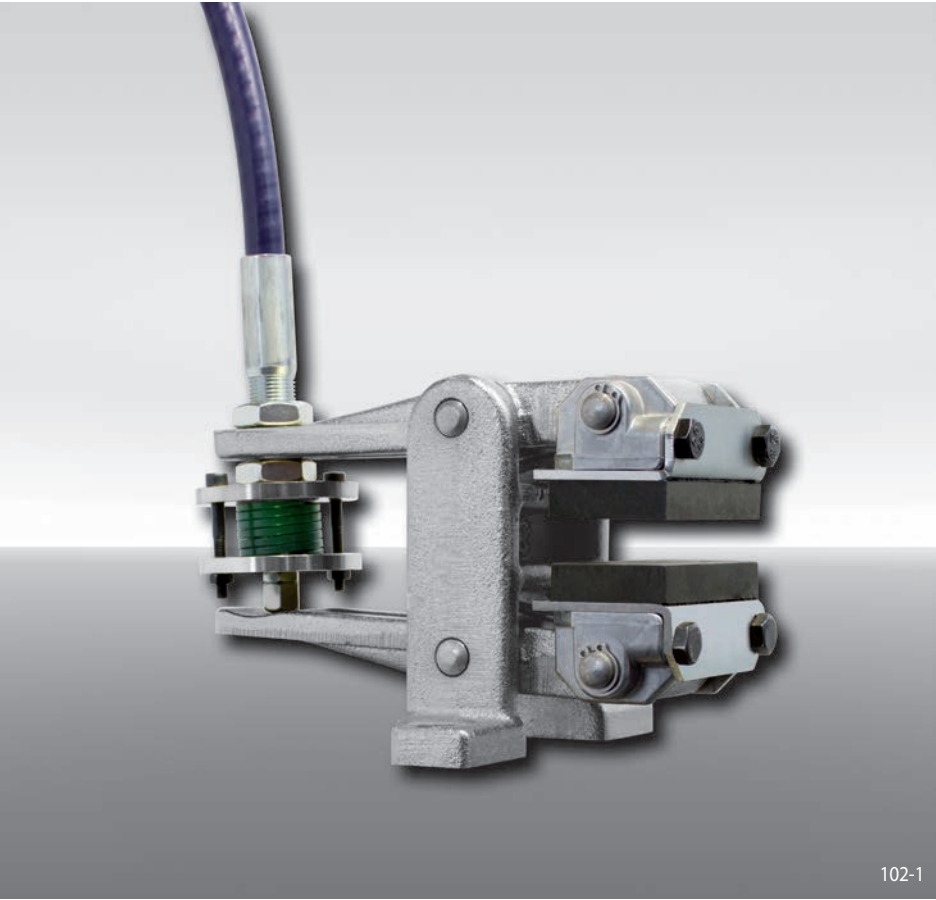

102-1

Features	Code
Brake Caliper	D
Mounting to the machine parallel to the brake disc	V
Frame size 020	020
Spring activated	F
Manually released	K
Manual adjustment to accommodate friction block wear	M
Pressure spring 510	510
Pull Cable installation mounted right or left available	R L
Thickness of brake disc 12,5 mm	12

Example for ordering

Brake Caliper DV 020 FKM, pressure spring 510, Pull Cable installation mounted right, thickness of brake disc 12,5 mm:

DV 020 FKM - 510 R - 12

Technical Data


Brake Caliper DV 020 FKM with pressure spring 510	
Brake disc diameter	Braking torque
mm	Nm
200	160
250	210
300	270
355	330
430	410
520	510
Clamping force	2750 N
Weight	4,4 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Accessories

The Brake Caliper can be delivered fully assembled with RCS® Pull Cable and Hand Brake Lever. Please indicate the required cable length.


For further information regarding RCS® Pull Cable and Hand Brake Lever see page 185.

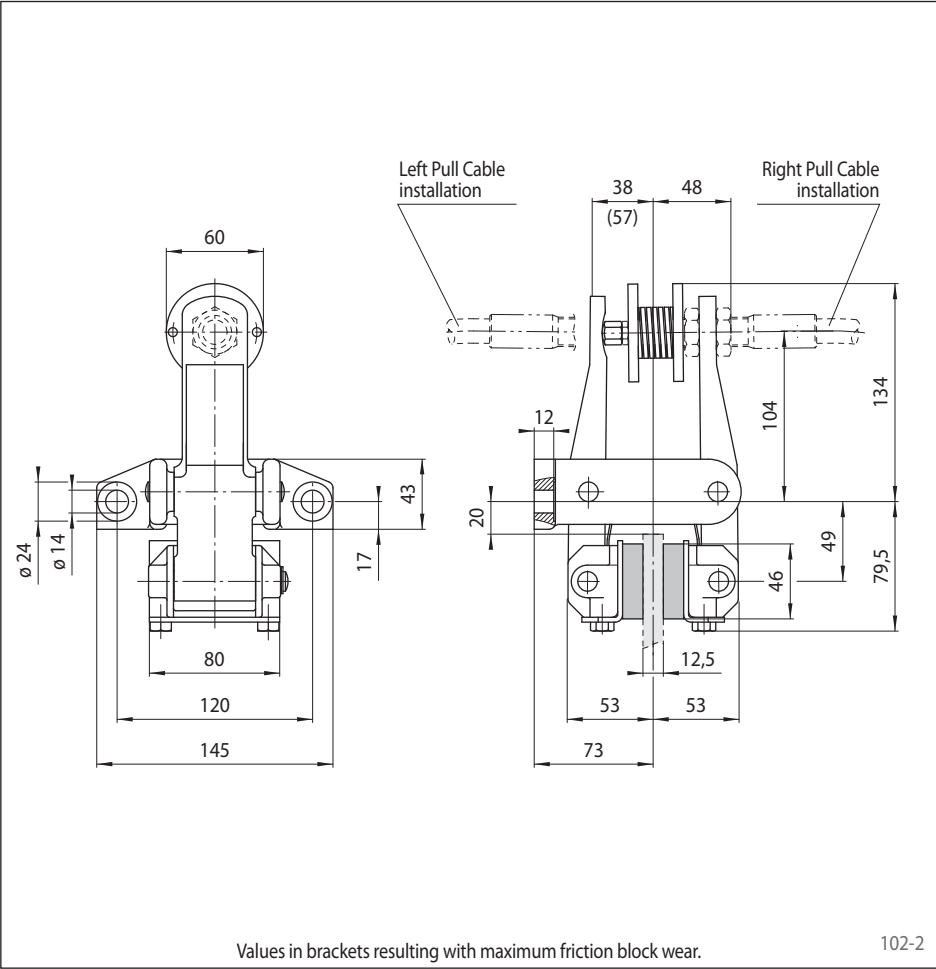


102-2

Brake Caliper DH 020 FKM

spring activated – manually released
by Pull Cable

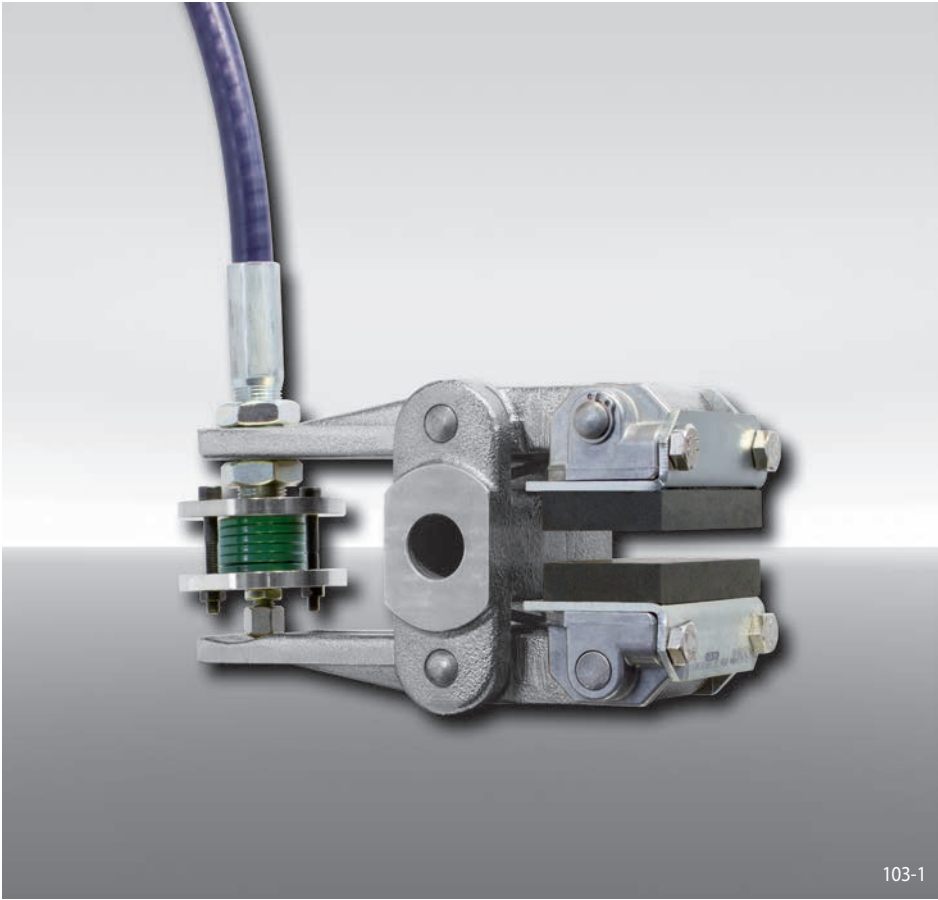

103-1

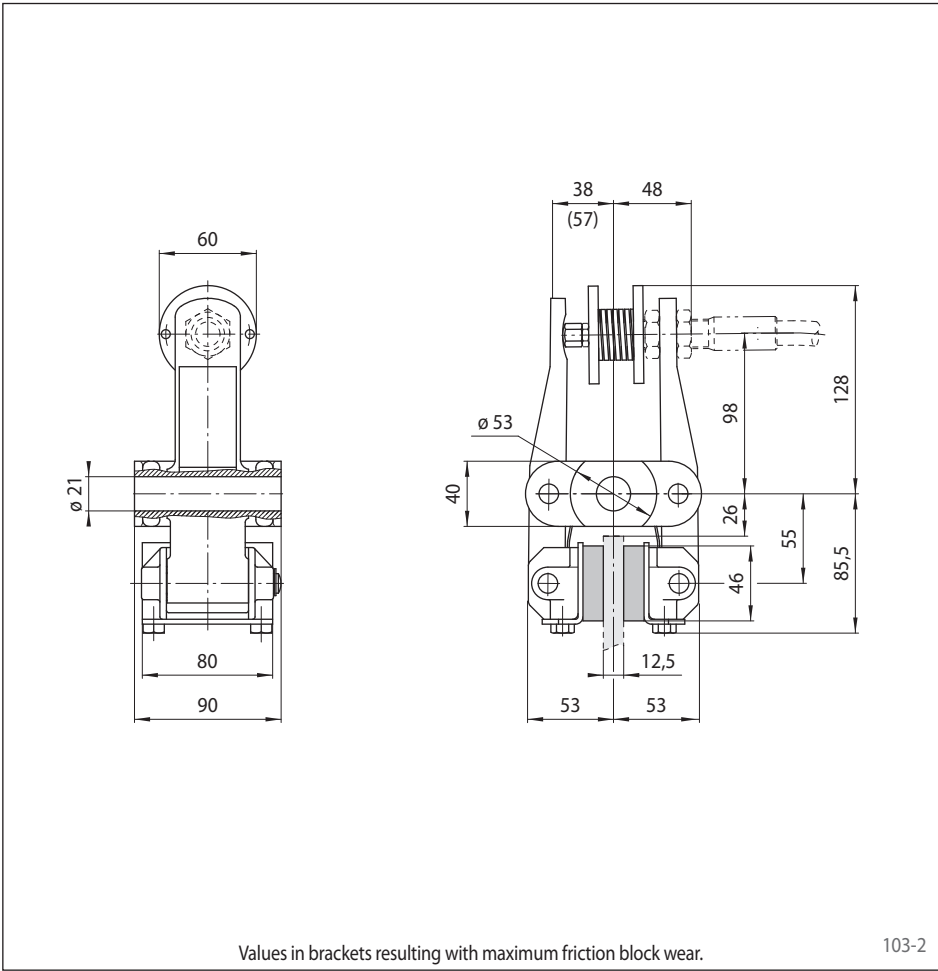

103-2

Features	Code
Brake Caliper	D
Mounting to the machine at right angles to the brake disc	H
Frame size 020	020
Spring activated	F
Manually released	K
Manual adjustment to accommodate friction block wear	M
Pressure spring 510	510
Position of the Pull Cable installation to the right or left can be defined by turning the brake during installation	U
Thickness of brake disc 12,5 mm	12

Example for ordering

Brake Caliper DH 020 FKM, pressure spring 510, position of the Pull Cable installation can be to the right or left, thickness of brake disc 12,5 mm:

DH 020 FKM - 510 U - 12

Technical Data

Brake Caliper DH 020 FKM with pressure spring 510	
Brake disc diameter	Braking torque
mm	Nm
200	160
250	210
300	270
355	330
430	410
520	510
Clamping force	2750 N
Weight	4,4 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Accessories

The Brake Caliper can be delivered fully assembled with RCS® Pull Cable and Hand Brake Lever. Please indicate the required cable length.

For further information regarding RCS® Pull Cable and Hand Brake Lever see page 185.

Handwriting practice lines consisting of 18 horizontal lines.

Graph paper grid consisting of 20 columns and 20 rows.

Brake Caliper DH 005 PFK

pneumatically activated – spring released



105-1


Features	Code
Brake Caliper	D
Mounting to the machine at right angles to the brake disc	H
Frame size 005	005
Pneumatically activated	P
Spring released	F
No adjustment to accommodate friction block wear	K
Pressure piston 605	605
Pressure piston mounted in central position	M
Thickness of brake disc 6 mm	06

Example for ordering

Brake Caliper DH 005 PFK, pressure piston 605, pressure piston mounted in central position, thickness of brake disc 6 mm:


DH 005 PFK - 605 M - 06

Technical Data

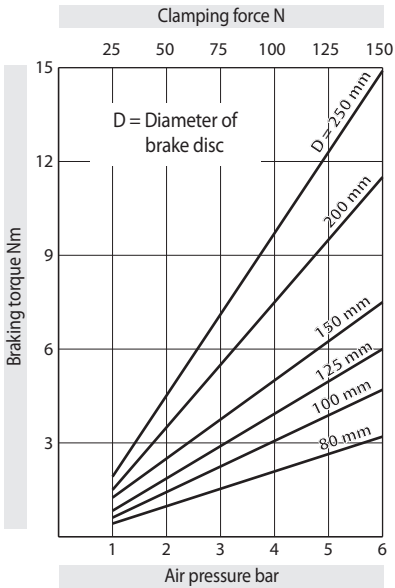

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

- Air pressure: max. 6 bar
- Air volume: max. 3 cm³ per activation
- Weight: 0,4 kg

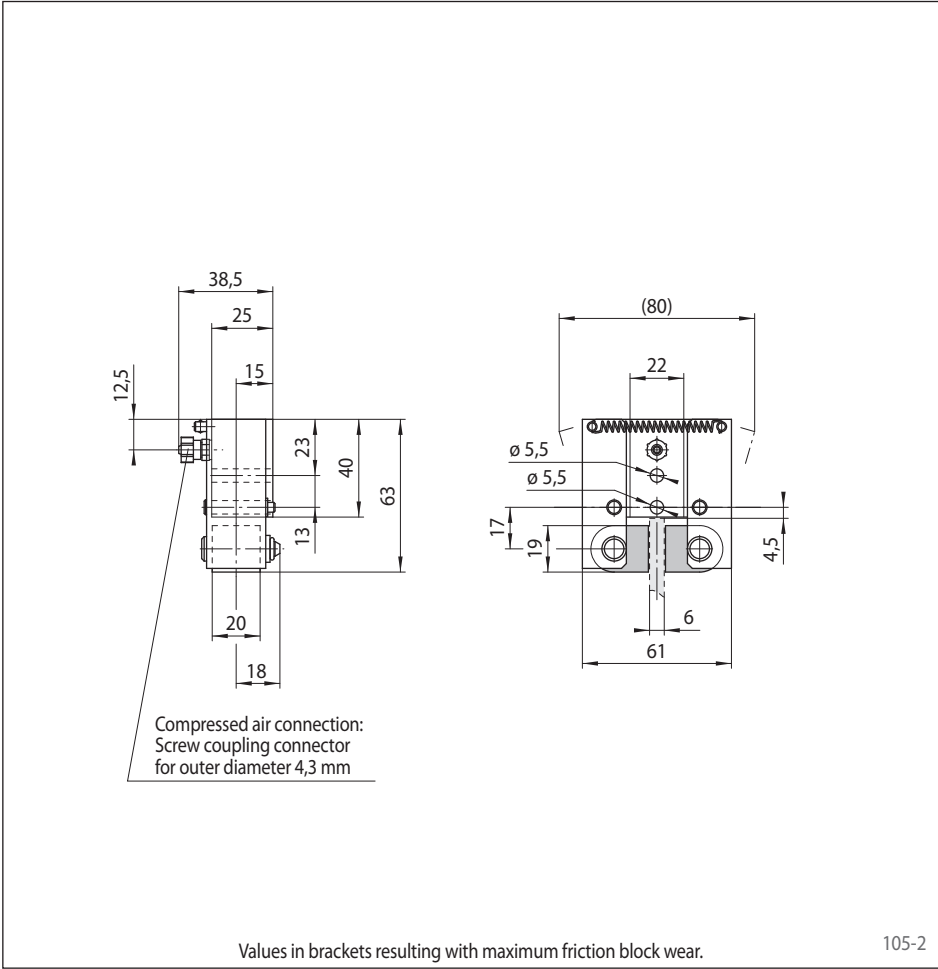

105-2

Brake Caliper DH 010 PFK

pneumatically activated – spring released



106-1


Features	Code
Brake Caliper	D
Mounting to the machine at right angles to the brake disc	H
Frame size 010	010
Pneumatically activated	P
Spring released	F
No adjustment to accommodate friction block wear	K
Pressure piston 610	610
Pressure piston mounted in central position	M
Thickness of brake disc 12,5 mm	12

Example for ordering

Brake Caliper DH 010 PFK, pressure piston 610, pressure piston mounted in central position, thickness of brake disc 12,5 mm:


DH 010 PFK - 610 M - 12

Technical Data

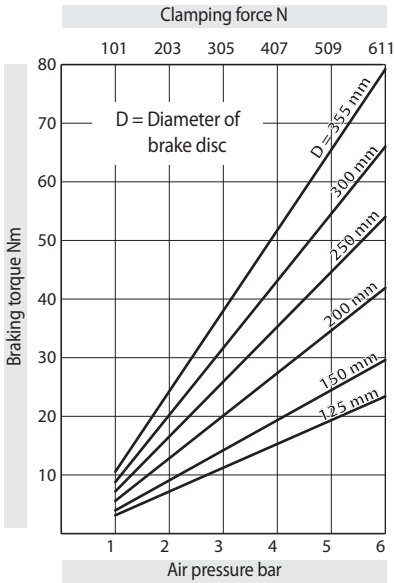

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.


- Air pressure: max. 6 bar
- Air volume: max. 10 cm³ per activation
- Weight: 1,1 kg

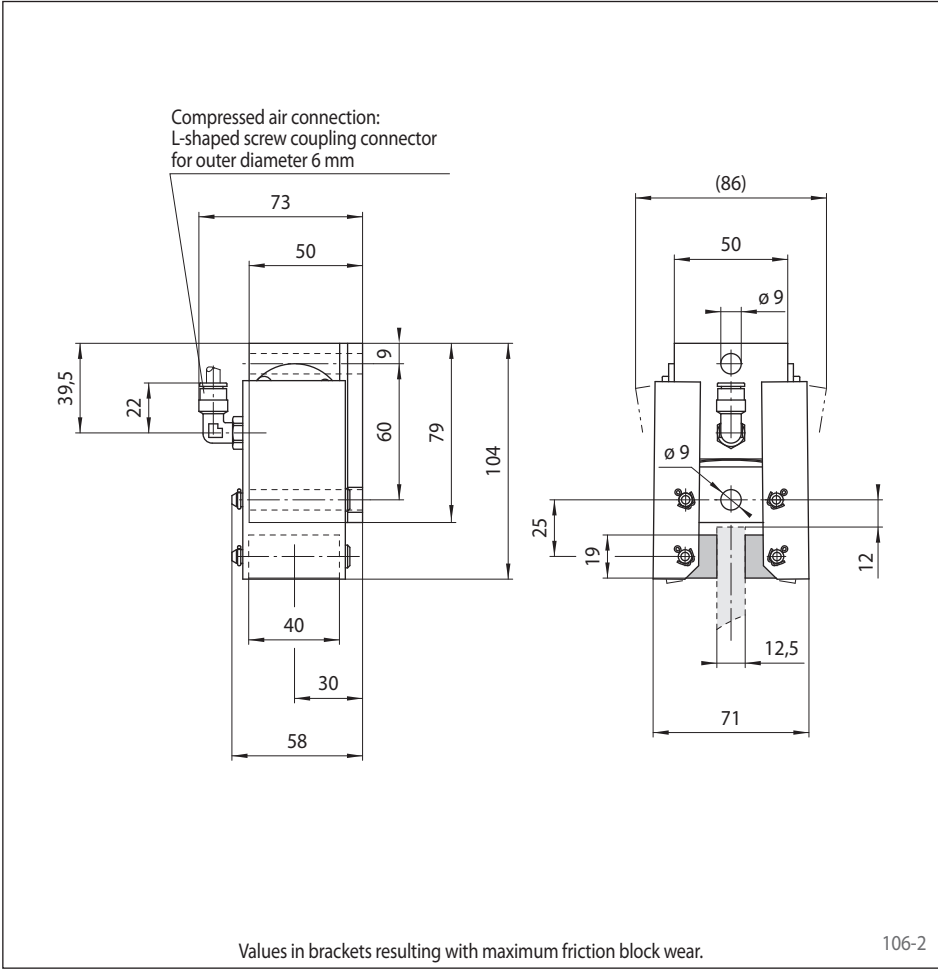

106-2

Brake Caliper DH 015 PFK

pneumatically activated – spring released

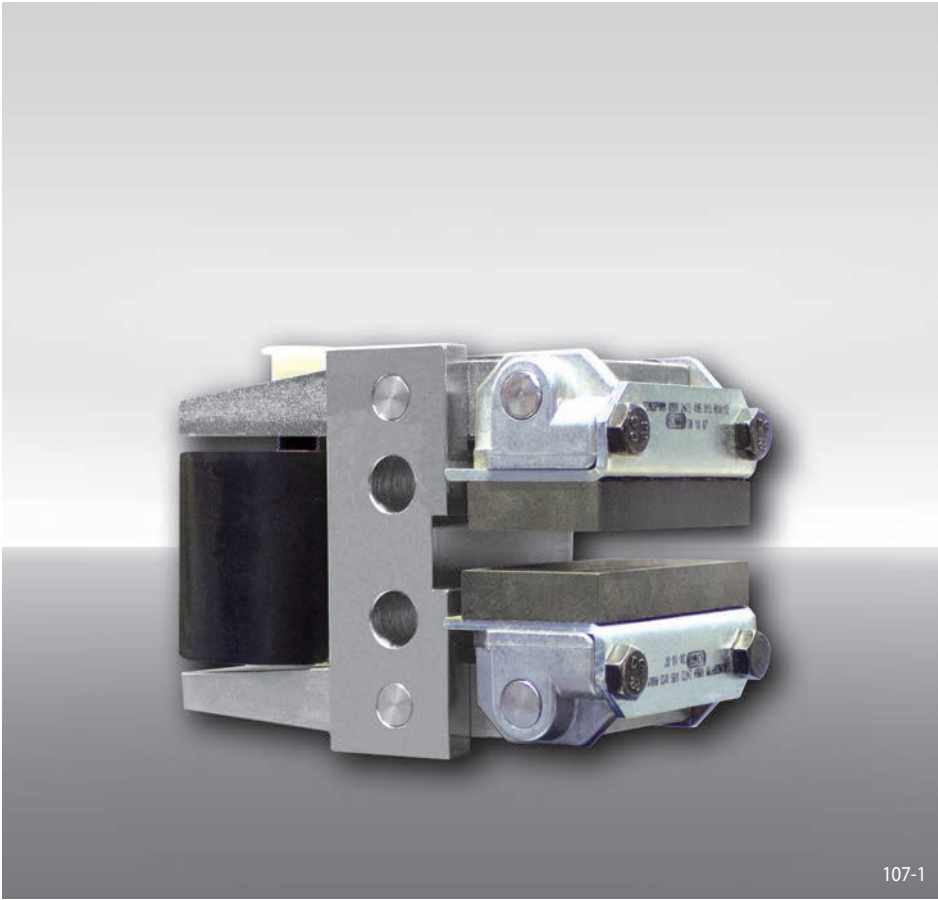


107-1

Features	Code
Brake Caliper	D
Mounting to the machine at right angles to the brake disc	H
Frame size 015	015
Pneumatically activated	P
Spring released	F
No adjustment to accommodate friction block wear	K
Thruster 620	620
Thruster mounted in central position	M
Thickness of brake disc 12,5 mm	12

Example for ordering


Brake Caliper DH 015 PFK, thruster 620, thruster mounted in central position, thickness of brake disc 12,5 mm:

DH 015 PFK - 620 M - 12

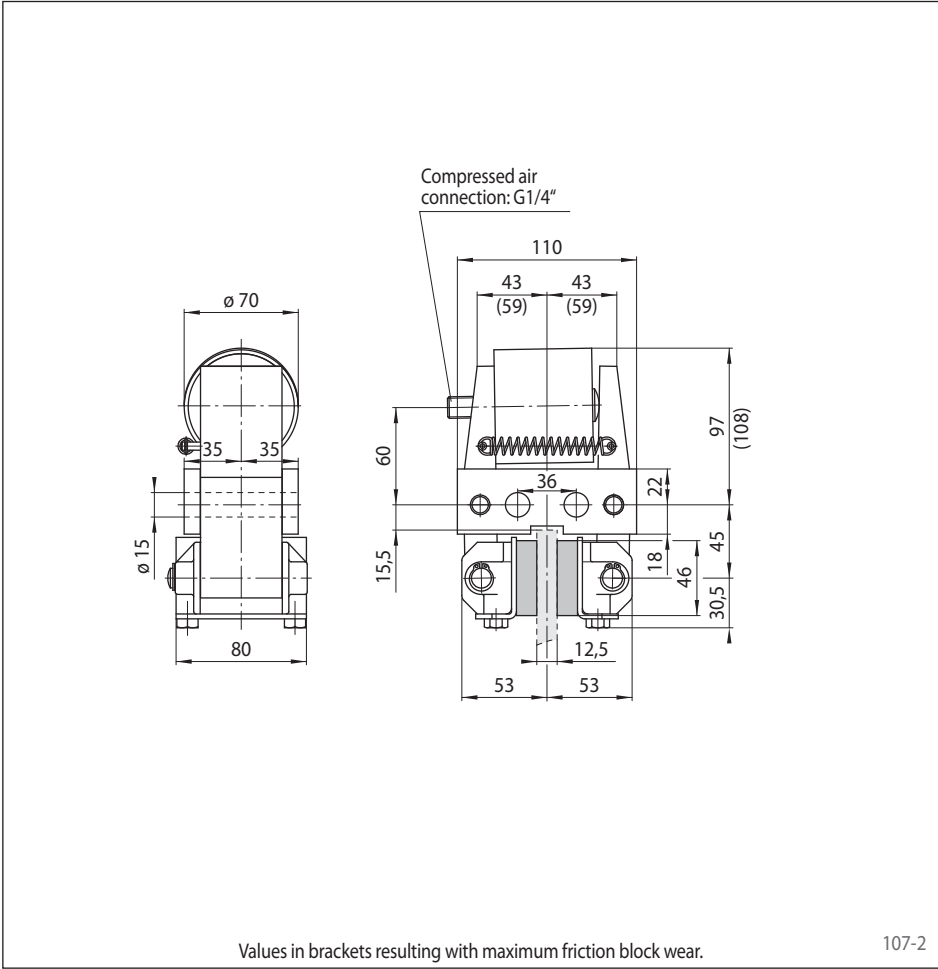

107-2

Technical Data

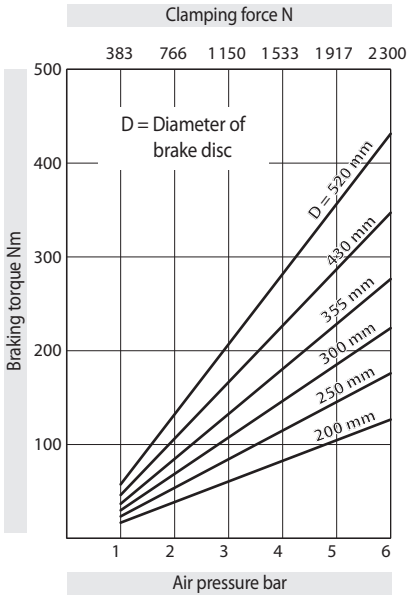

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.


Air pressure: max. 6 bar

Air volume: max. 124 cm³ per activation

Weight: 4,6 kg

Brake Caliper DV 020 PFK

pneumatically activated – spring released

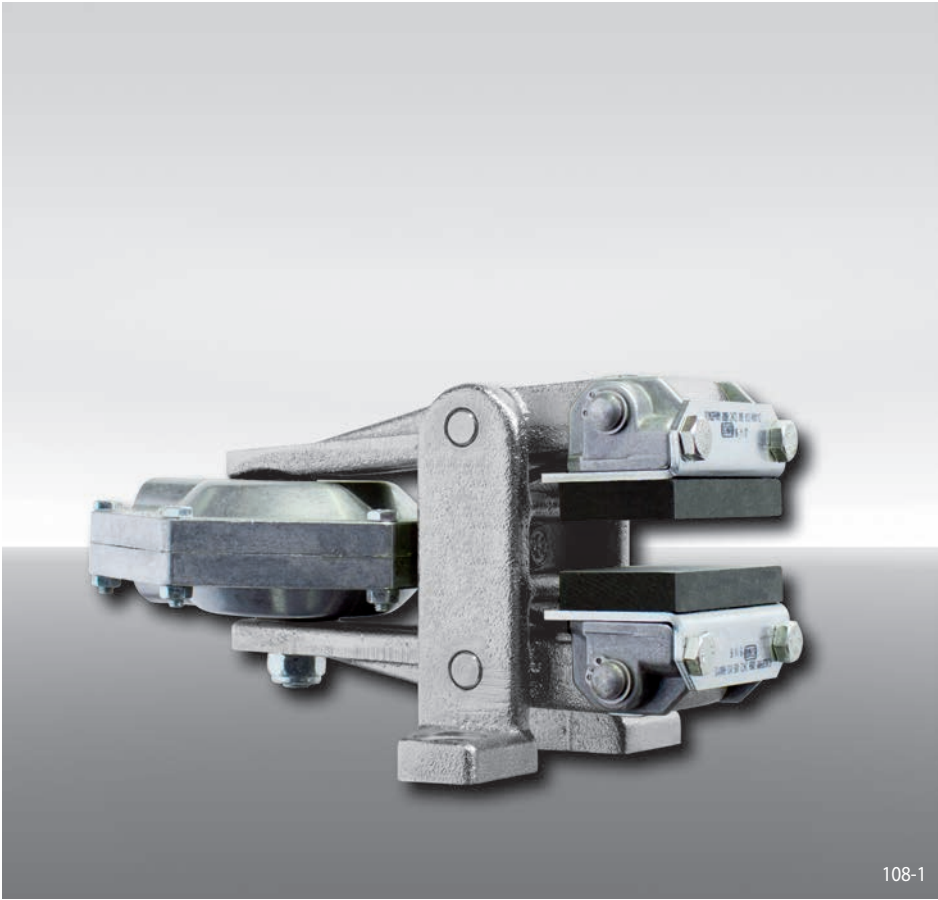


108-1

Features	Code
Brake Caliper	D
Mounting to the machine parallel to the brake disc	V
Frame size 020	020
Pneumatically activated	P
Spring released	F
No adjustment to accommodate friction block wear	K
Thruster 630	630
Thruster mounted in central position	M
Thickness of brake disc 12,5 mm	12


Example for ordering

Brake Caliper DV 020 PFK, thruster 630, thruster mounted in central position, thickness of brake disc 12,5 mm:

DV 020 PFK - 630 M - 12

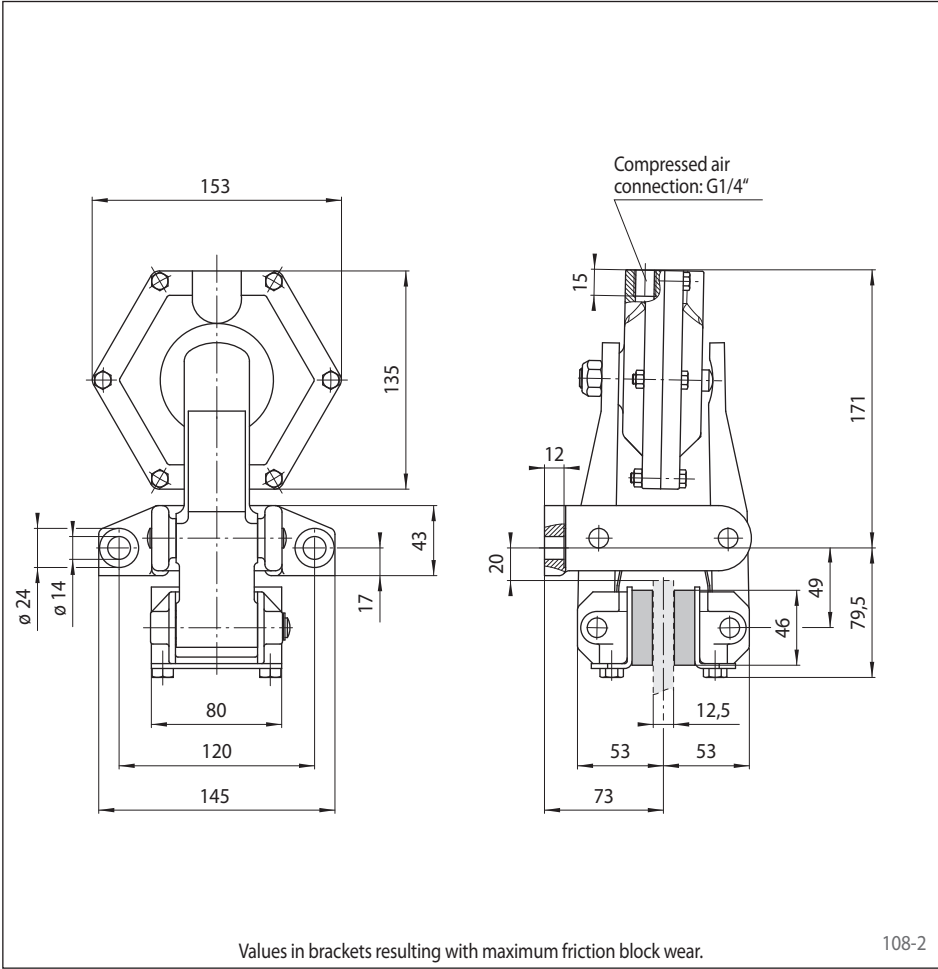

Technical Data

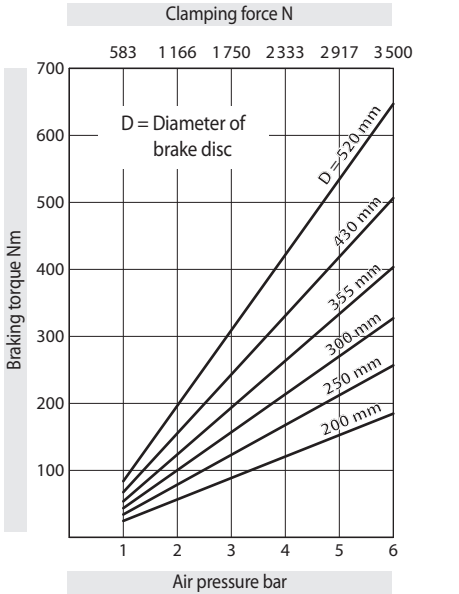

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.


Air pressure: max. 6 bar

Air volume: max. 120 cm³ per activation

Weight: 4,8 kg

Brake Caliper DH 020 PFK

pneumatically activated – spring released

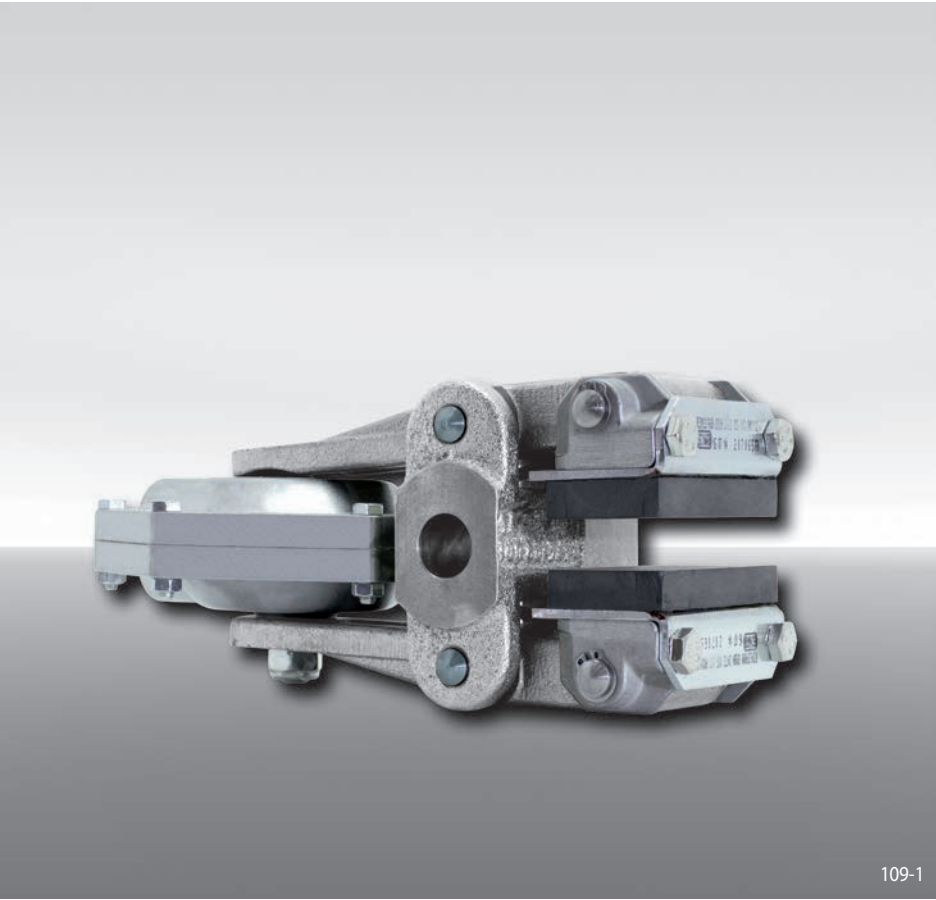


109-1

Features	Code
Brake Caliper	D
Mounting to the machine at right angles to the brake disc	H
Frame size 020	020
Pneumatically activated	P
Spring released	F
No adjustment to accommodate friction block wear	K
Thruster 630	630
Thruster mounted in central position	M
Thickness of brake disc 12,5 mm	12

Example for ordering


Brake Caliper DH 020 PFK, thruster 630, thruster mounted in central position, thickness of brake disc 12,5 mm:

DH 020 PFK - 630 M - 12

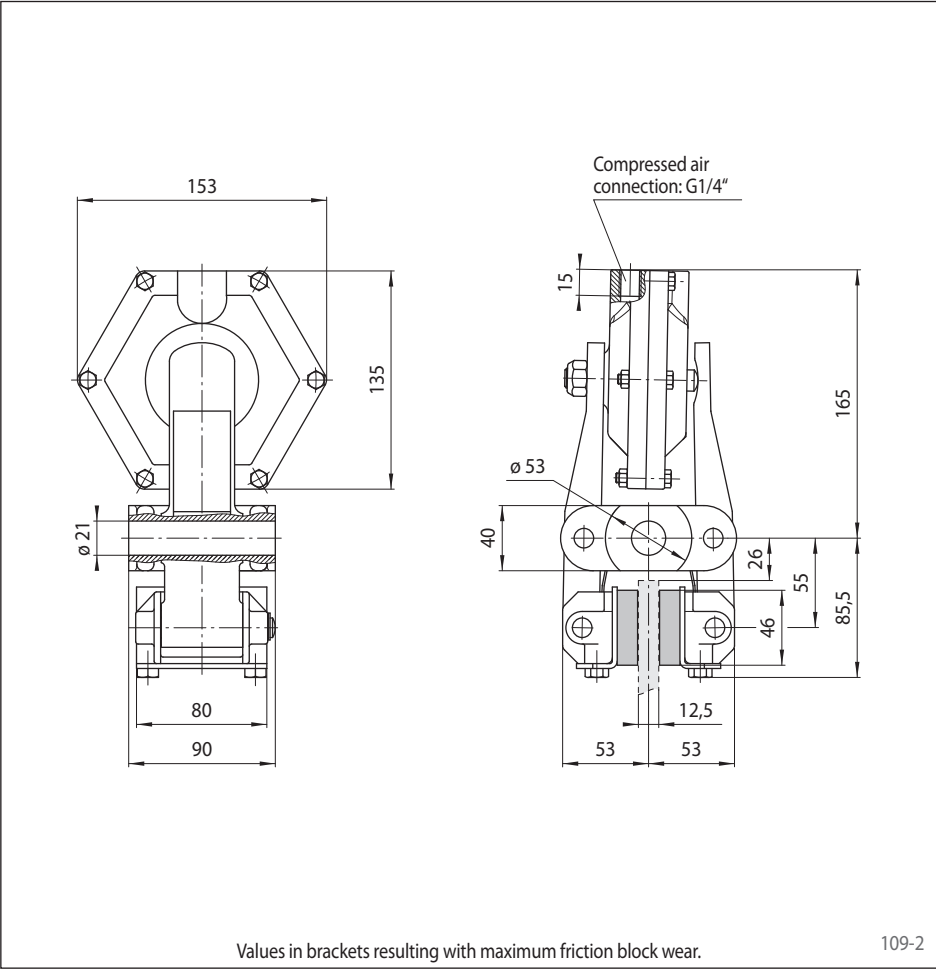

109-2

Technical Data

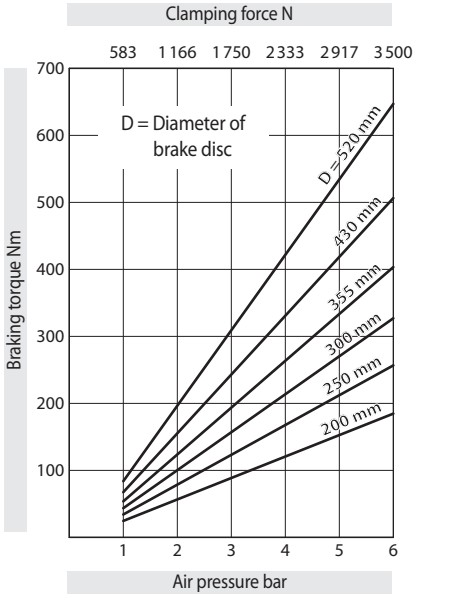

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.


Air pressure: max. 6 bar

Air volume: max. 120 cm³ per activation

Weight: 4,8 kg

Brake Caliper DH 025 PFM

pneumatically activated – spring released

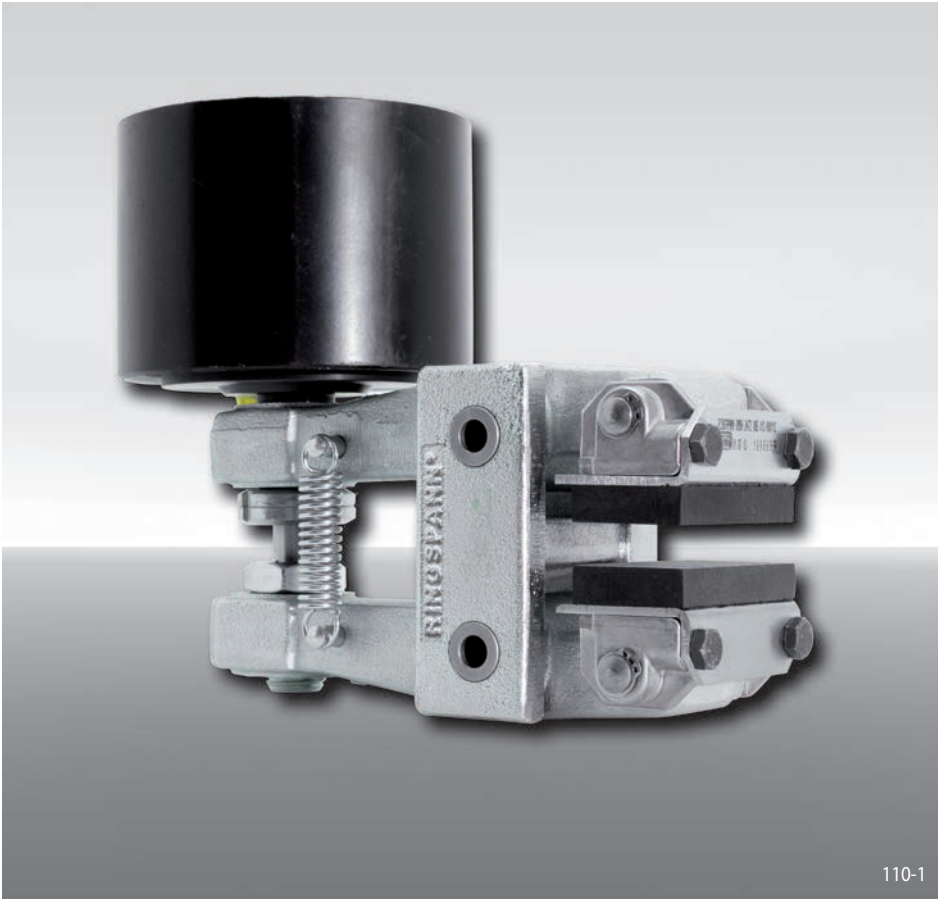

Features	Code
Brake Caliper	D
Mounting to the machine at right angles to the brake disc	H
Frame size 025	025
Pneumatically activated	P
Spring released	F
Manual adjustment to accommodate friction block wear	M
Thrusters 635 or 655 are available	635 655
Thruster mounted right or left available	R L
Thickness of brake disc 12,5 mm or 25 mm	12 25


Example for ordering

Brake Caliper DH 025 PFM, thruster 635, thruster mounted right, thickness of brake disc 12,5 mm:

DH 025 PFM - 635 R - 12

Technical Data


Brake Caliper DH 025 PFM - 635

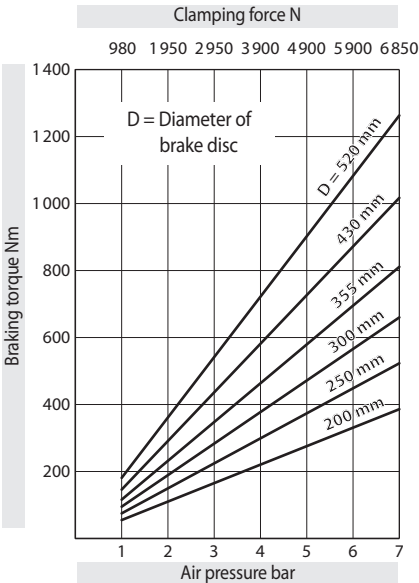

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

- Air pressure: max. 7 bar
- Air volume: max. 175 cm³ per activation
- Weight: 7,1 kg

Brake Caliper DH 025 PFM - 655

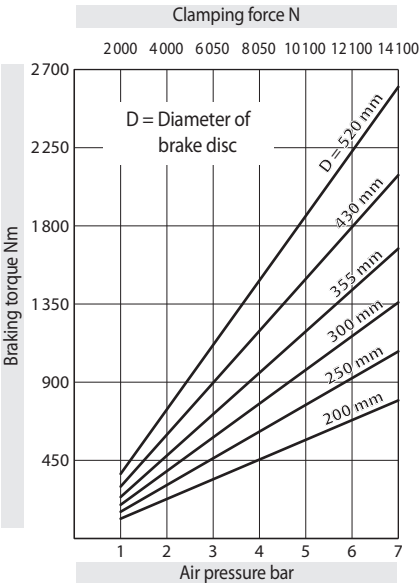

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

- Air pressure: max. 7 bar
- Air volume: max. 740 cm³ per activation
- Weight: 10,3 kg


pneumatically activated – spring released

RINGSPANN®



Brake Caliper DV 030 PFM

pneumatically activated – spring released

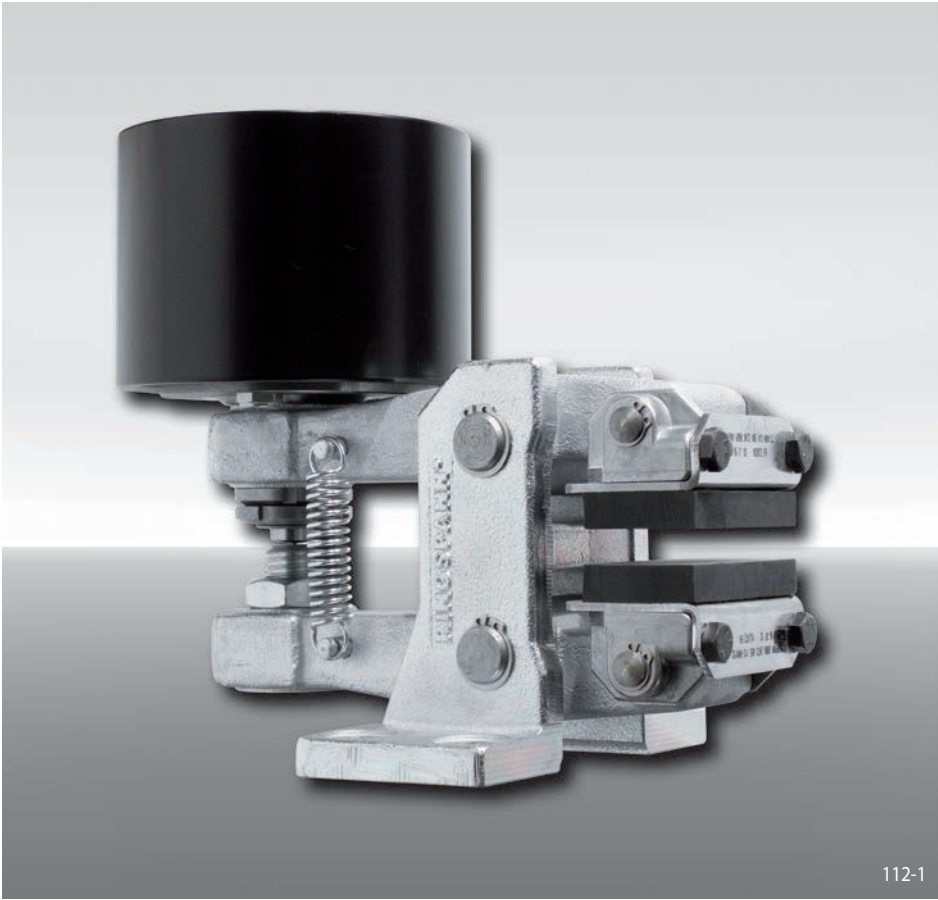

Features	Code
Brake Caliper	D
Mounting to the machine parallel to the brake disc	V
Frame size 030	030
Pneumatically activated	P
Spring released	F
Manual adjustment to accommodate friction block wear	M
Thrusters 635 or 655 are available	635 655
Thruster mounted right or left available	R L
Thickness of brake disc 12,5 mm or 25 mm	12 25


Example for ordering

Brake Caliper DV 030 PFM, thruster 635, thruster mounted right, thickness of brake disc 12,5 mm:

DV 030 PFM - 635 R - 12

Technical Data


Brake Caliper DV 030 PFM - 635

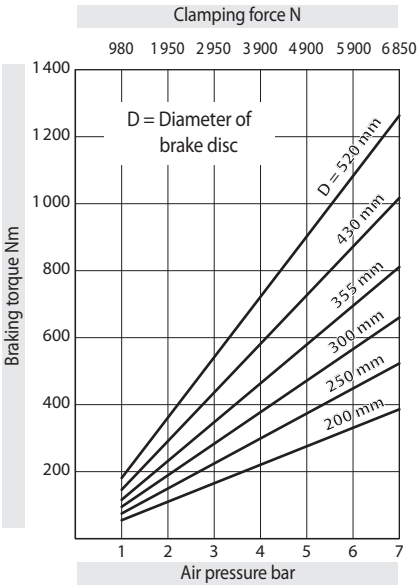

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

- Air pressure: max. 7 bar
- Air volume: max. 175 cm³ per activation
- Weight: 7,3 kg

Brake Caliper DV 030 PFM - 655

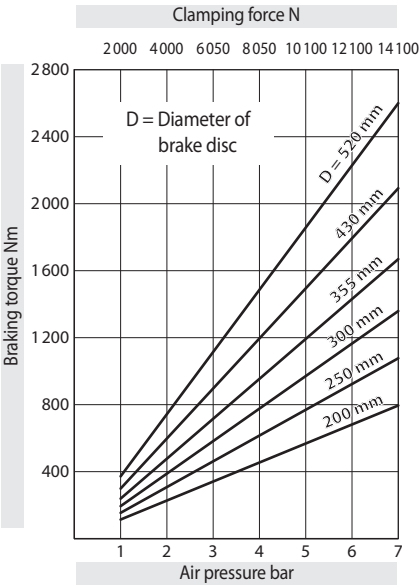


The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

- Air pressure: max. 7 bar
- Air volume: max. 740 cm³ per activation
- Weight: 10,5 kg


Brake Caliper DV 030 PFM

pneumatically activated – spring released

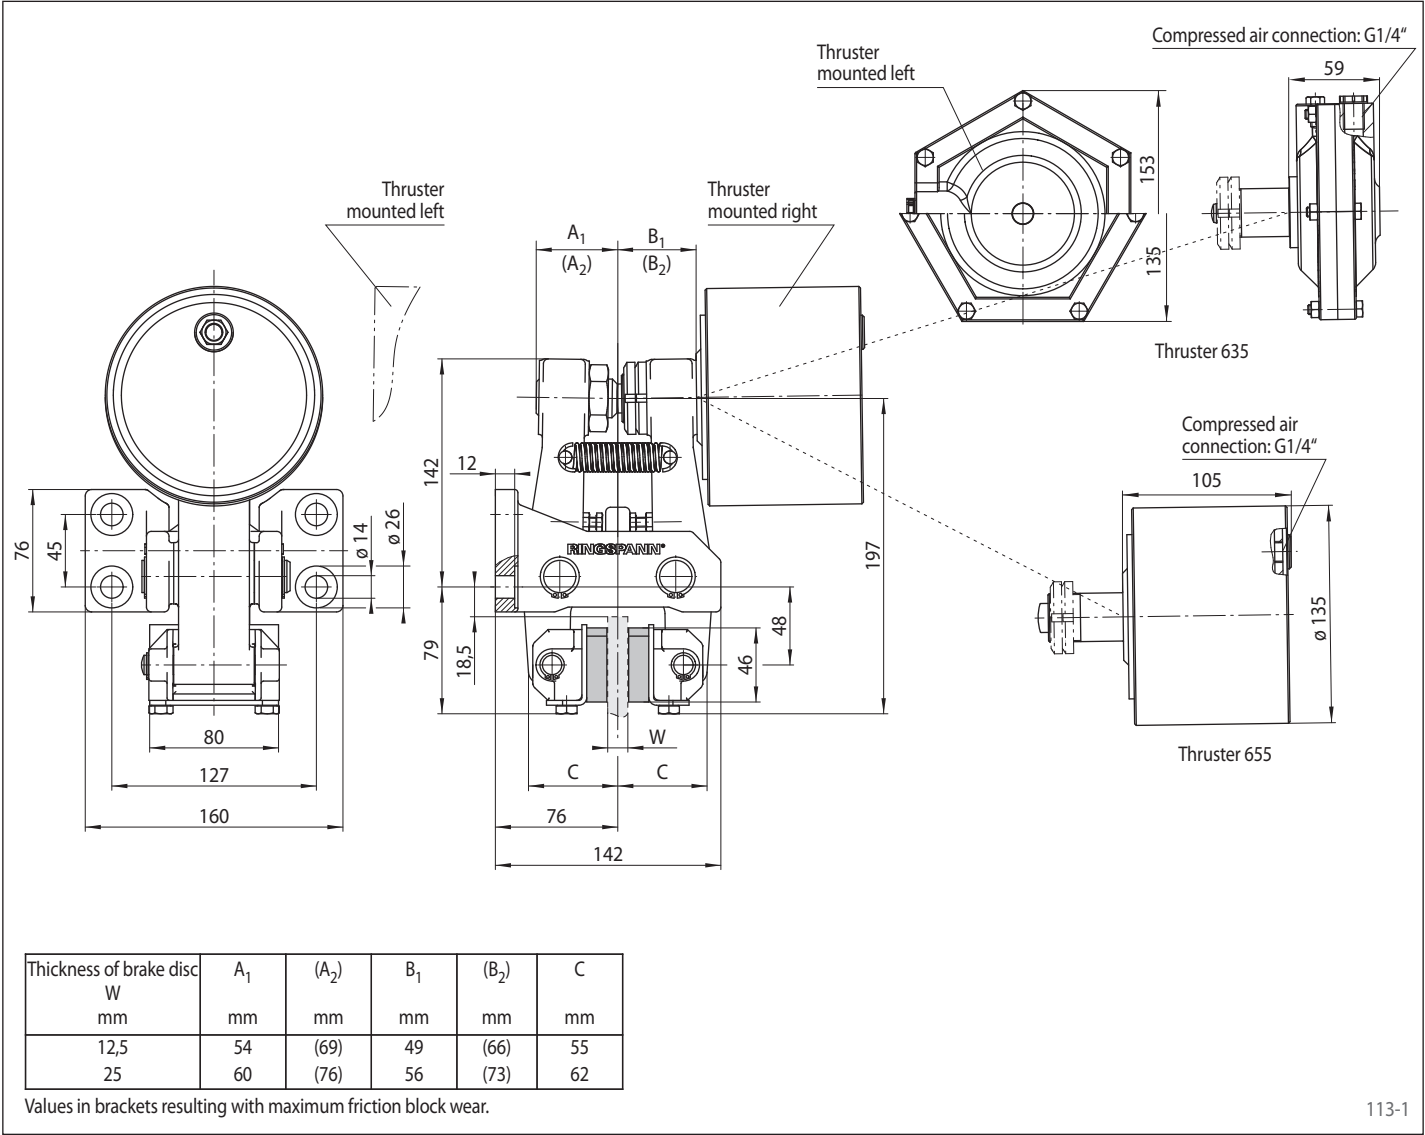

Brake Caliper DH 030 PFM

pneumatically activated – spring released

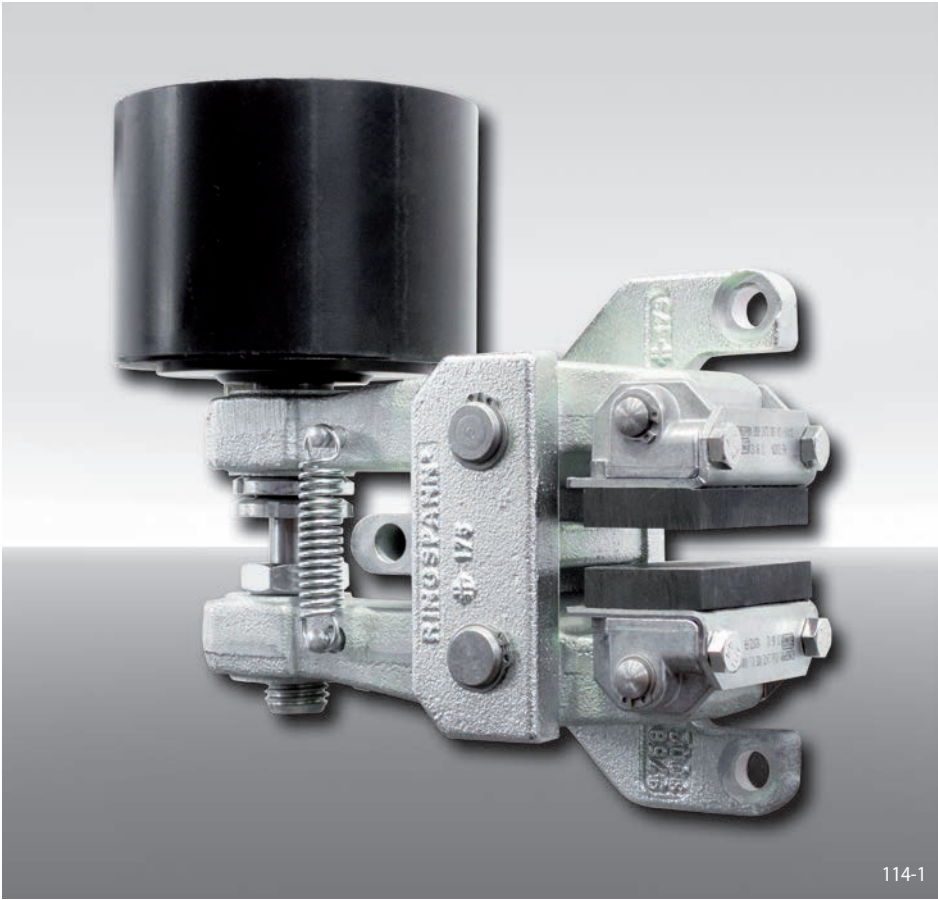

Features	Code
Brake Caliper	D
Mounting to the machine at right angles to the brake disc	H
Frame size 030	030
Pneumatically activated	P
Spring released	F
Manual adjustment to accommodate friction block wear	M
Thrusters 635 or 655 are available	635 655
Thruster mounted right or left available	R L
Thickness of brake disc 12,5 mm or 25 mm	12 25


Example for ordering

Brake Caliper DH 030 PFM, thruster 635, thruster mounted right, thickness of brake disc 12,5 mm:

DH 030 PFM - 635 R - 12

Technical Data


Brake Caliper DH 030 PFM - 635

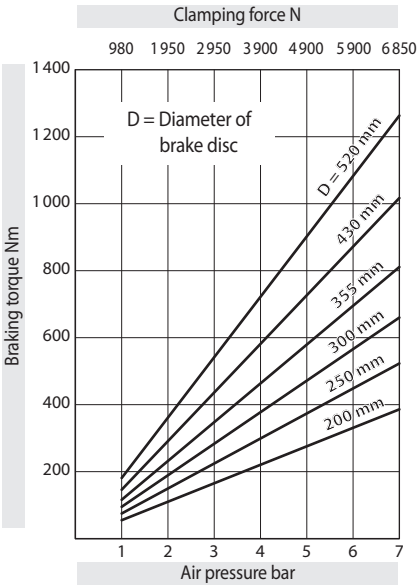

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

- Air pressure: max. 7 bar
- Air volume: max. 175 cm³ per activation
- Weight: 7,7 kg

Brake Caliper DH 030 PFM - 655

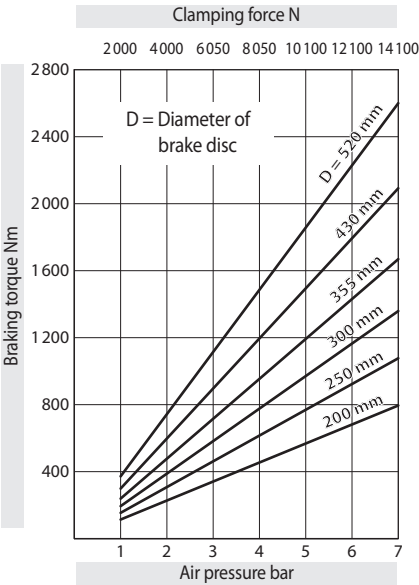


The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

- Air pressure: max. 7 bar
- Air volume: max. 740 cm³ per activation
- Weight: 10,9 kg

Brake Caliper DH 030 PFM


pneumatically activated – spring released

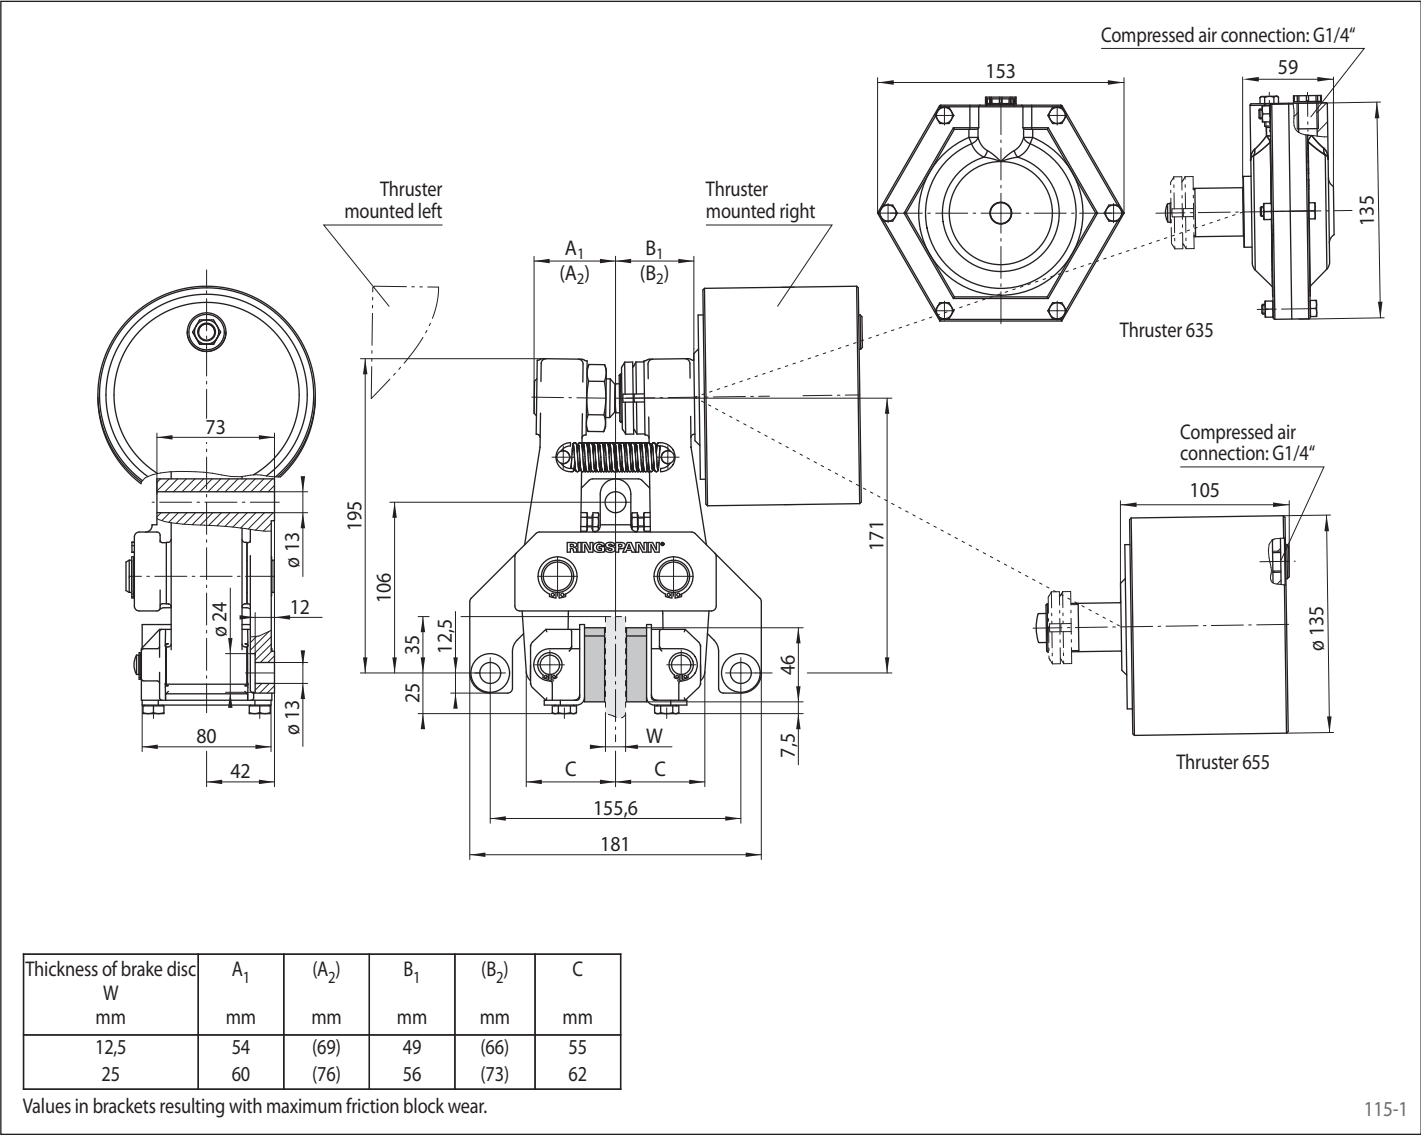

115-1

Brake Caliper DV 035 PFM

pneumatically activated – spring released

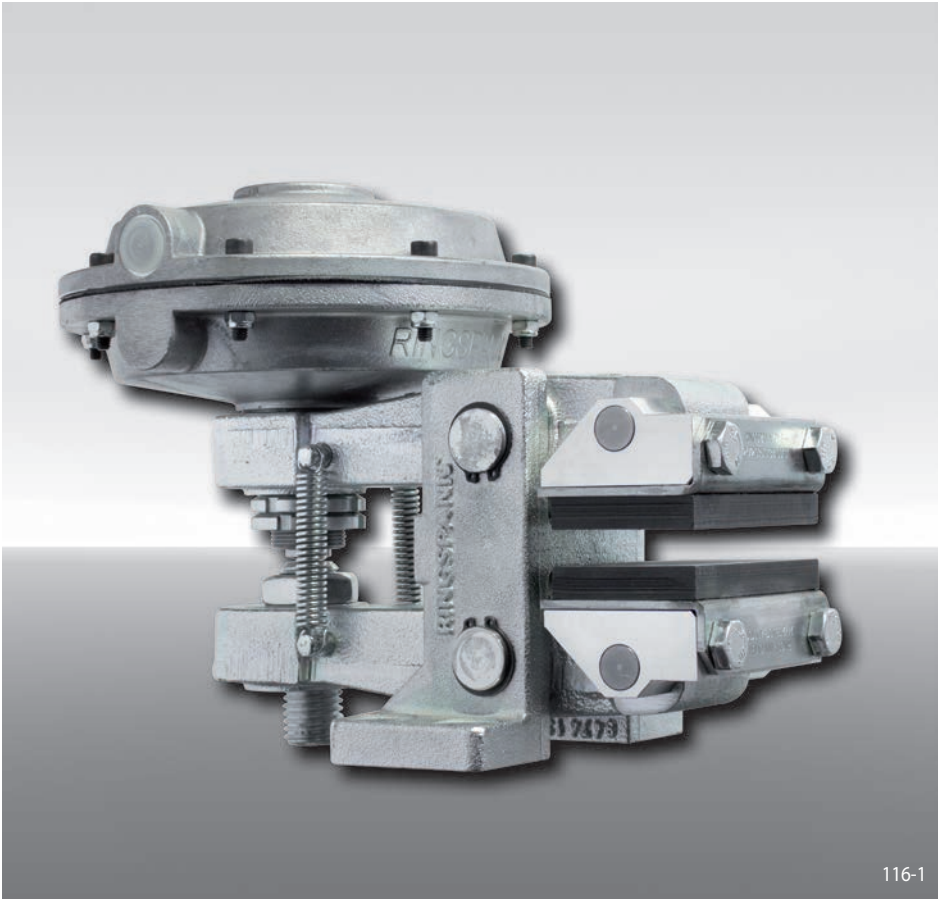

Features	Code
Brake Caliper	D
Mounting to the machine parallel to the brake disc	V
Frame size 035	035
Pneumatically activated	P
Spring released	F
Manual adjustment to accommodate friction block wear	M
Thrusters 635, 655 or 660 are available	635 655 660
Thruster mounted right available	R
Thickness of brake disc 12,5 mm, 25 mm, 30 mm or 40 mm	12 to 40


Example for ordering

Brake Caliper DV 035 PFM, thruster 660, thruster mounted right, thickness of brake disc 12,5 mm:

DV 035 PFM - 660 R - 12

Technical Data


Brake Caliper DV 035 PFM - 635

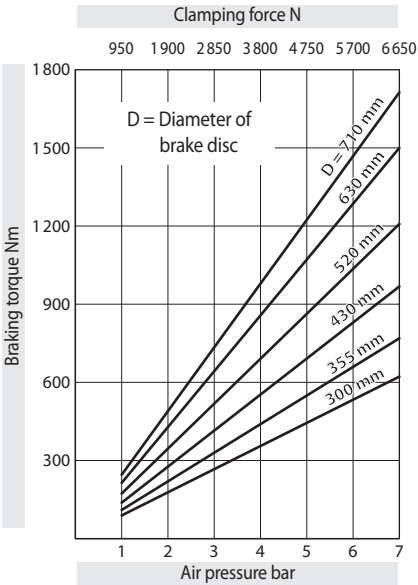

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

- Air pressure: max. 7 bar
- Air volume: max. 175 cm³ per activation
- Weight: 9,1 kg


Brake Caliper DV 035 PFM - 655

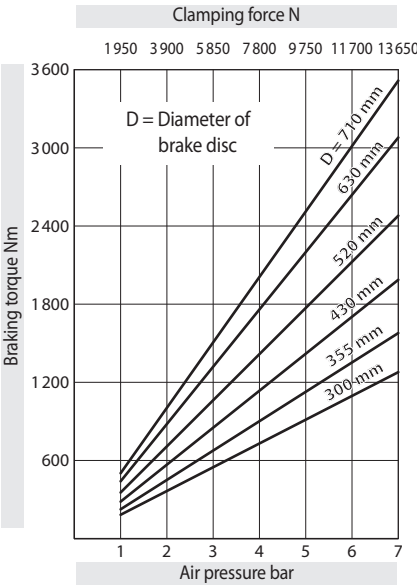

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

- Air pressure: max. 7 bar
- Air volume: max. 740 cm³ per activation
- Weight: 12,3 kg

Brake Caliper DV 035 PFM - 660

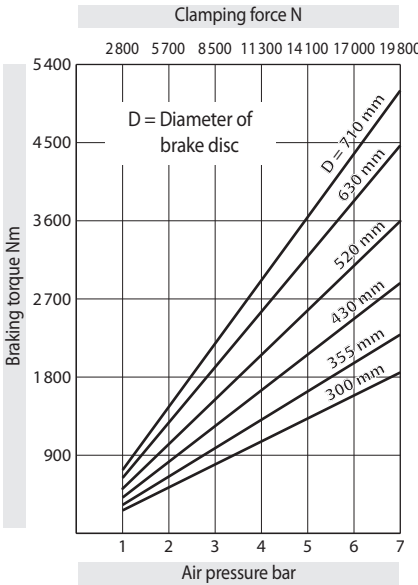


The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

- Air pressure: max. 7 bar
- Air volume: max. 450 cm³ per activation
- Weight: 11,4 kg


Brake Caliper DV 035 PFM

pneumatically activated – spring released

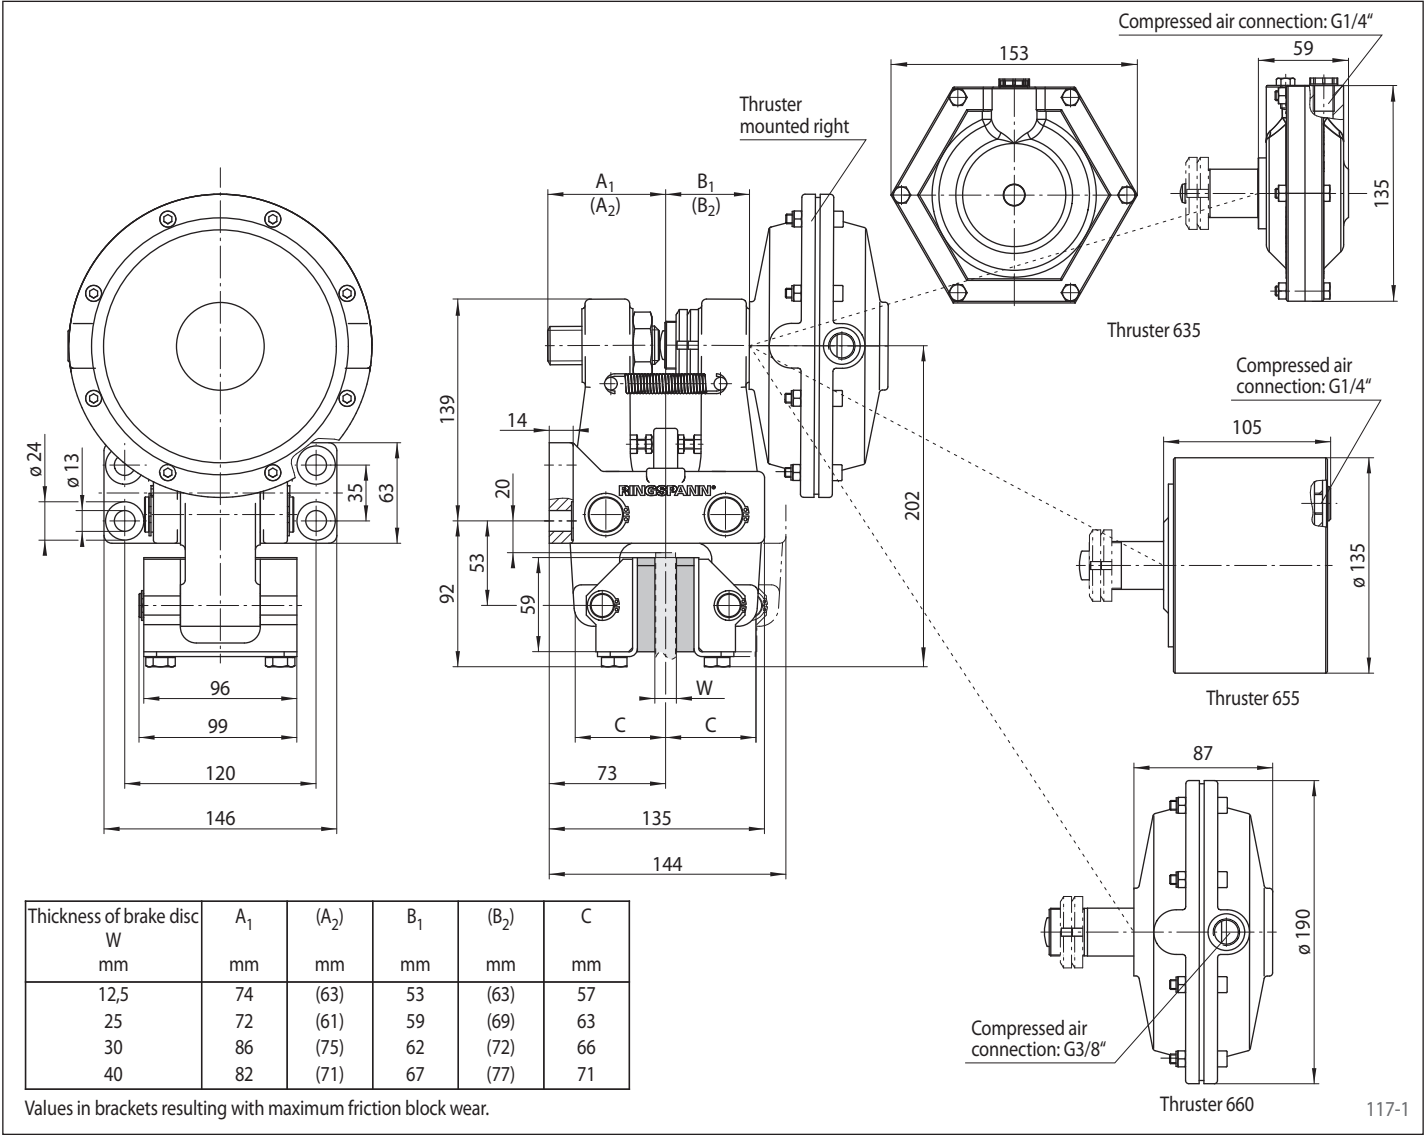

Brake Caliper DH 035 PFM

pneumatically activated – spring released

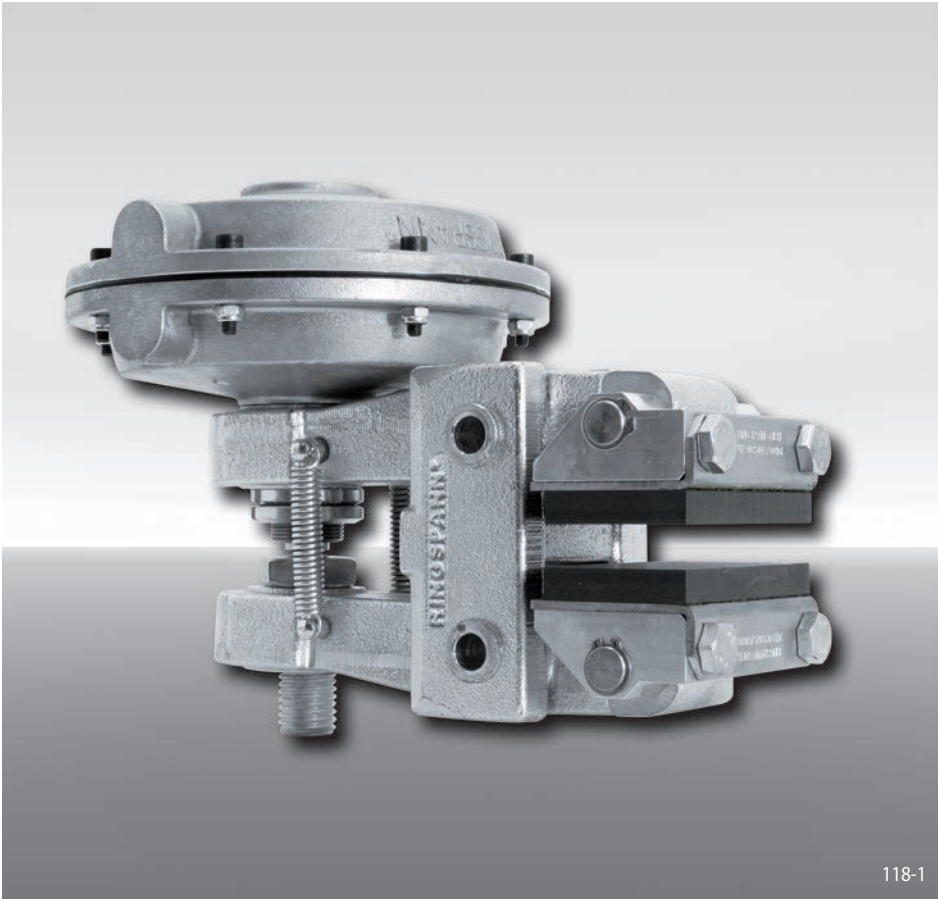

Features	Code
Brake Caliper	D
Mounting to the machine at right angles to the brake disc	H
Frame size 035	035
Pneumatically activated	P
Spring released	F
Manual adjustment to accommodate friction block wear	M
Thrusters 635, 655 or 660 are available	635 655 660
Thruster mounted right or left available	R L
Thickness of brake disc 12,5 mm, 25 mm, 30 mm or 40 mm	12 to 40


Example for ordering

Brake Caliper DH 035 PFM, thruster 660, thruster mounted right, thickness of brake disc 12,5 mm:

DH 035 PFM - 660 R - 12

Technical Data


Brake Caliper DH 035 PFM - 635

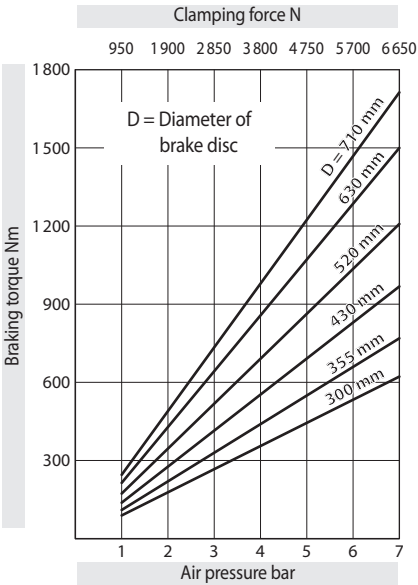

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

- Air pressure: max. 7 bar
- Air volume: max. 175 cm³ per activation
- Weight: 9,1 kg


Brake Caliper DH 035 PFM - 655

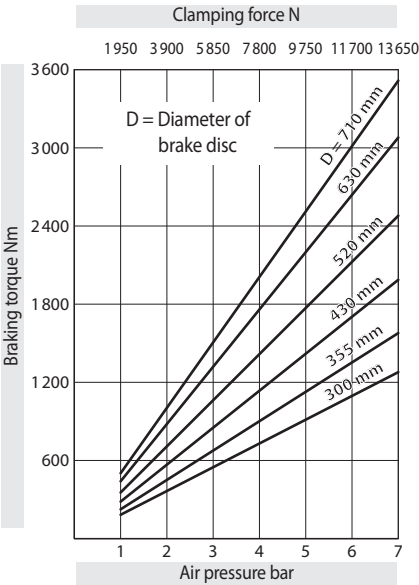

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

- Air pressure: max. 7 bar
- Air volume: max. 740 cm³ per activation
- Weight: 12,3 kg

Brake Caliper DH 035 PFM - 660

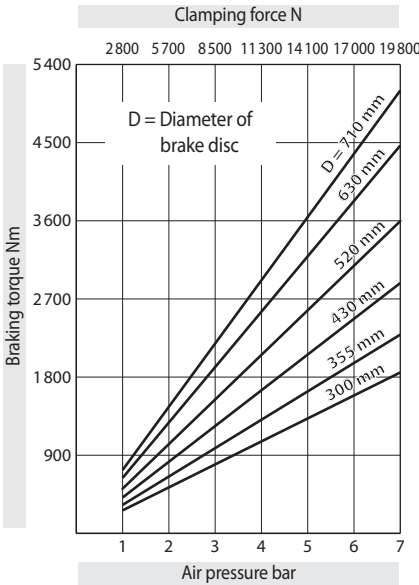


The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

- Air pressure: max. 7 bar
- Air volume: max. 450 cm³ per activation
- Weight: 11,4 kg


Brake Caliper DH 035 PFM

pneumatically activated – spring released

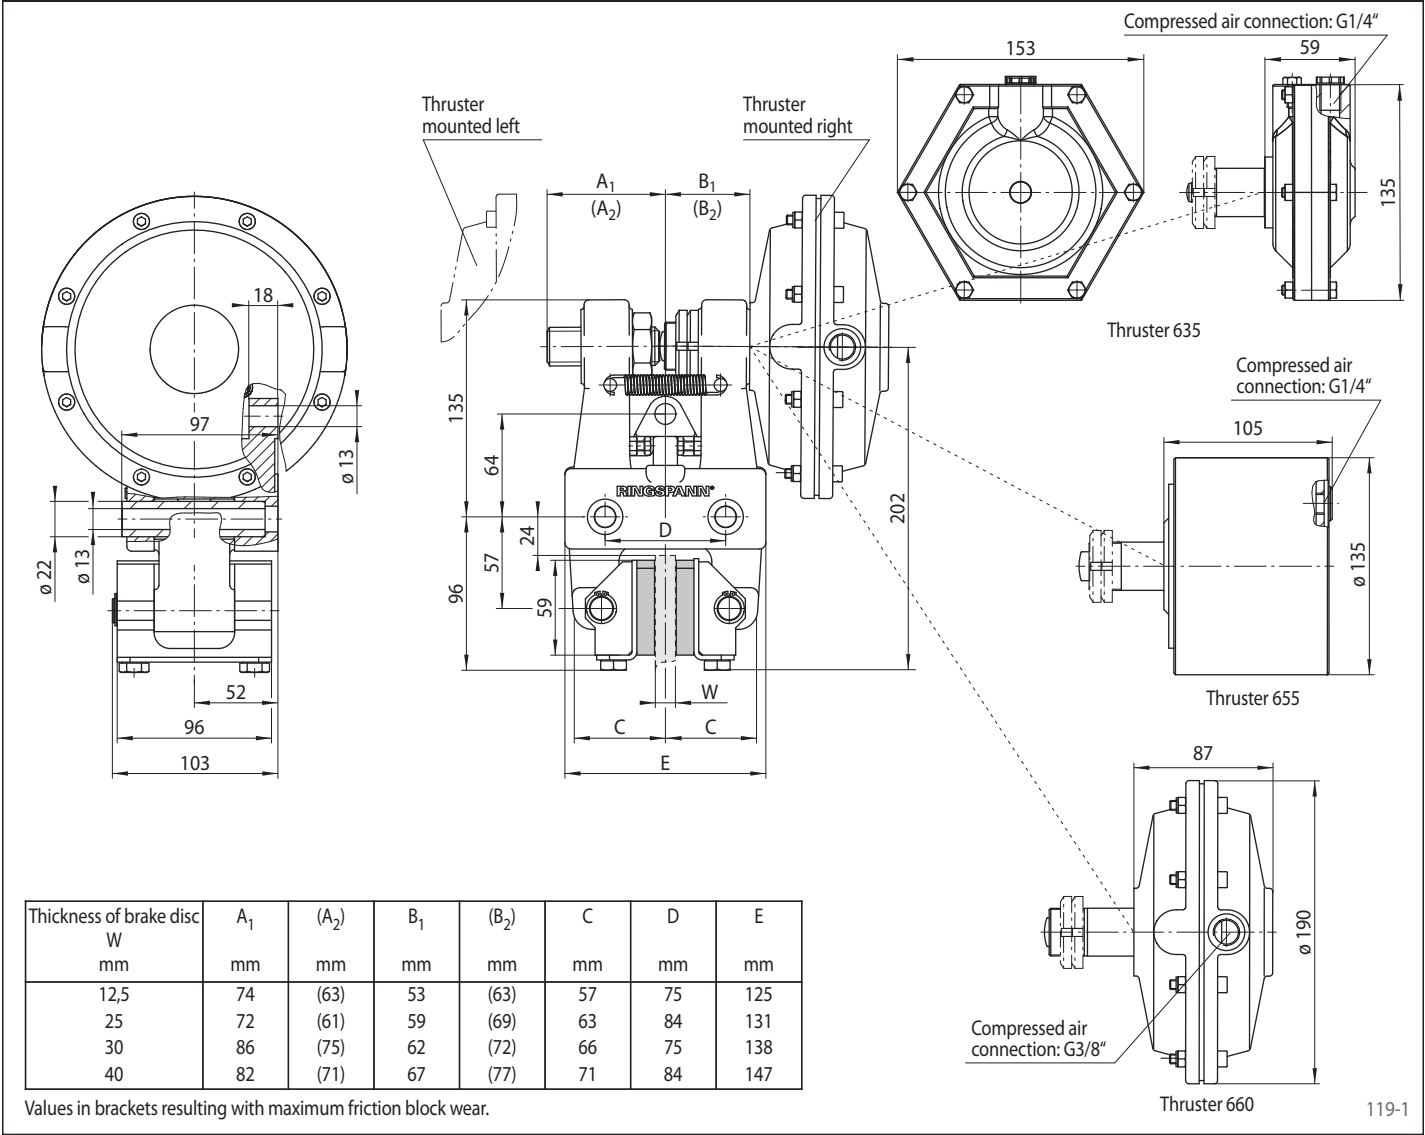

Brake Caliper DU 060 PFM

pneumatically activated – spring released

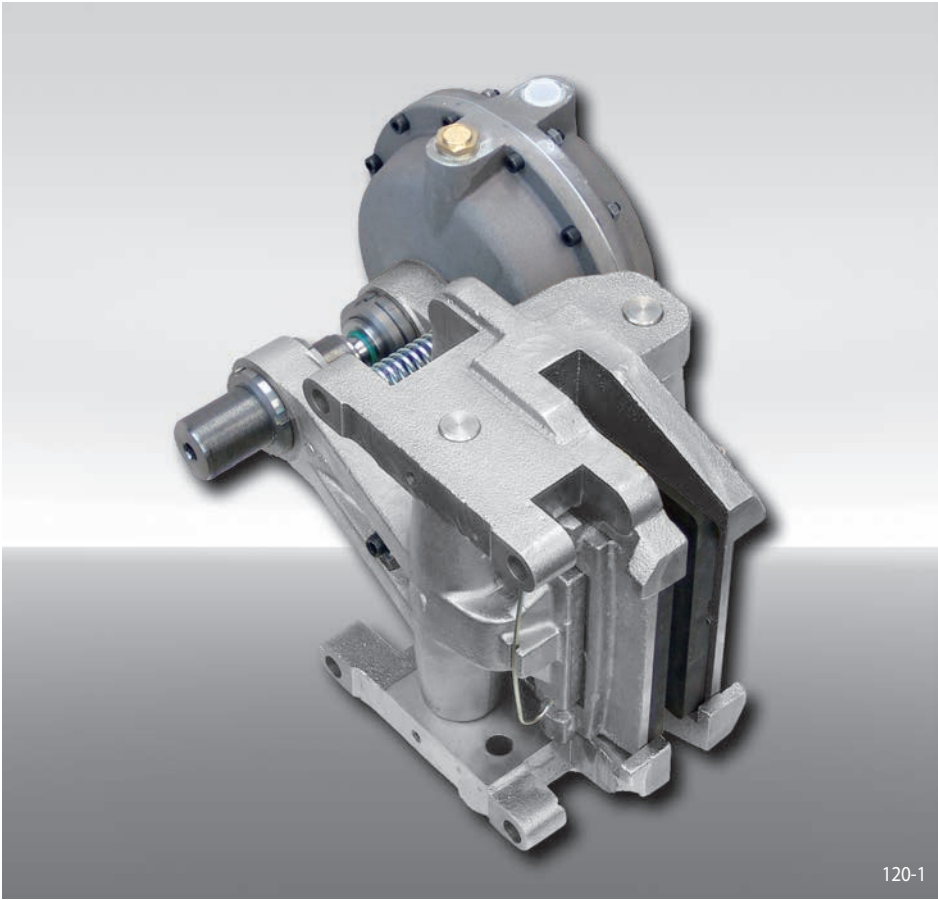

Features	Code
Brake Caliper	D
Mounting to the machine, can be made either parallel or at the right angles to the brake disc	U
Frame size 060	060
Pneumatically activated	P
Spring released	F
Manual adjustment to accommodate friction block wear	M
Thrusters 660 or 680 are available	660 680
Thruster mounted right or left available	R L
Thickness of brake disc 25 mm or 40 mm	25 40


Example for ordering

Brake Caliper DU 060 PFM, thruster 680, thruster mounted right, thickness of brake disc 25 mm:

DU 060 PFM - 680 R - 25

Technical Data

Brake Caliper DU 060 PFM - 660

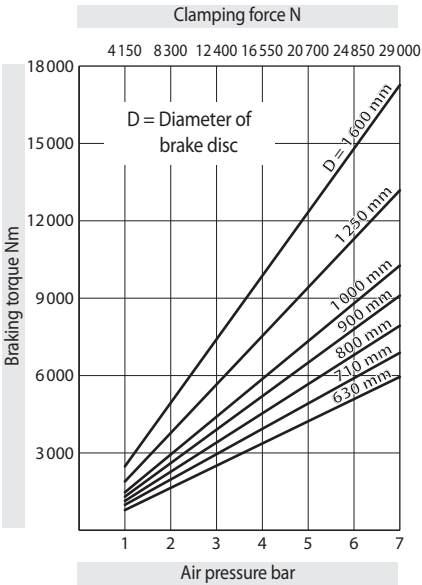


The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

Air pressure: max. 7 bar

Air volume: max. 450 cm³ per activation

Weight: 54 kg

Brake Caliper DU 060 PFM - 680

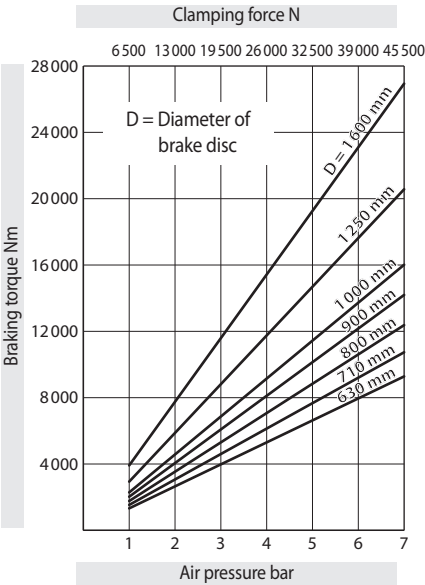

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.


Air pressure: max. 7 bar

Air volume: max. 2000 cm³ per activation




Weight: 56 kg

Brake Caliper DU 060 PFM

pneumatically activated – spring released

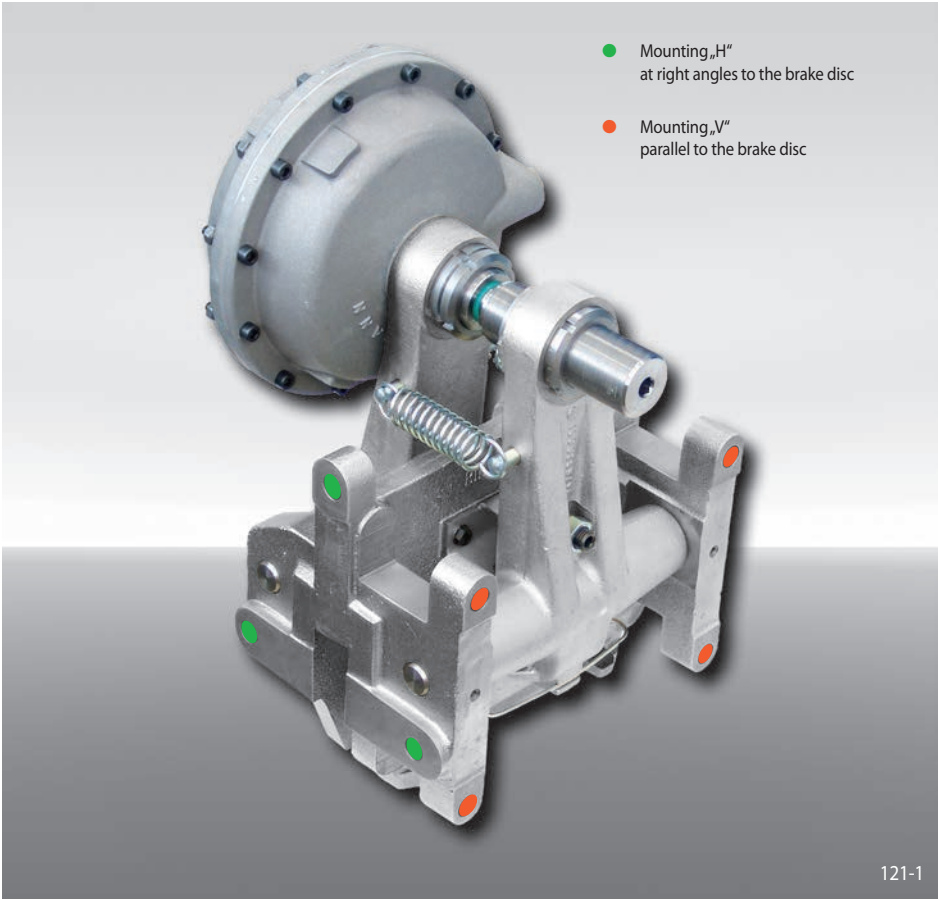


Frame Design

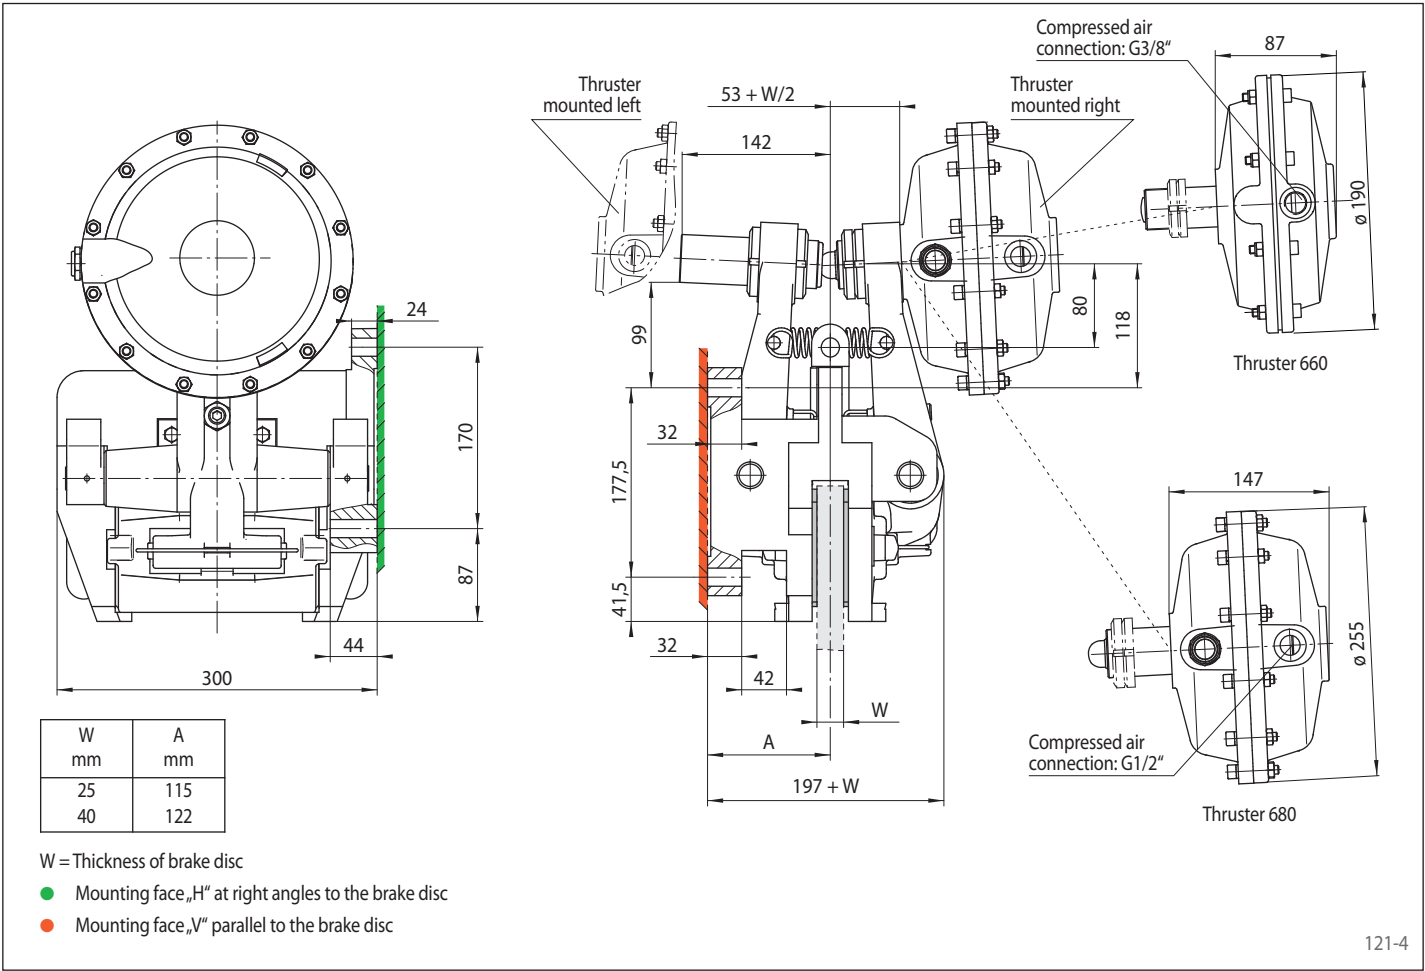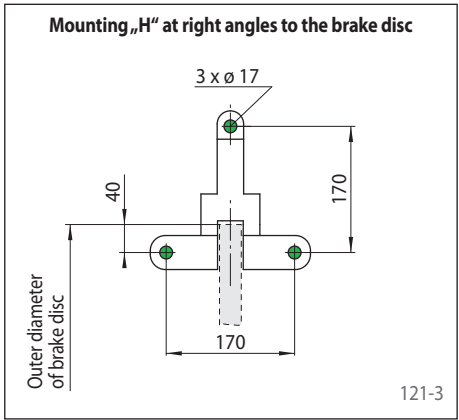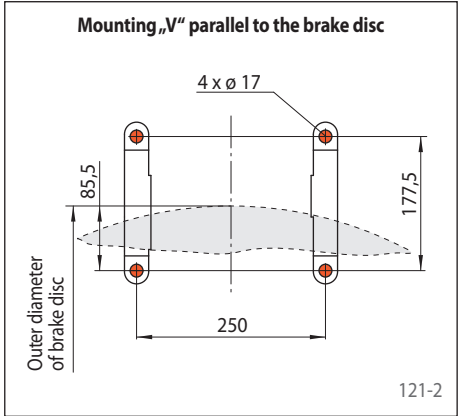

Brake Calipers EV 018 EFM and EH 018 EFM


electromagnetically activated – spring released

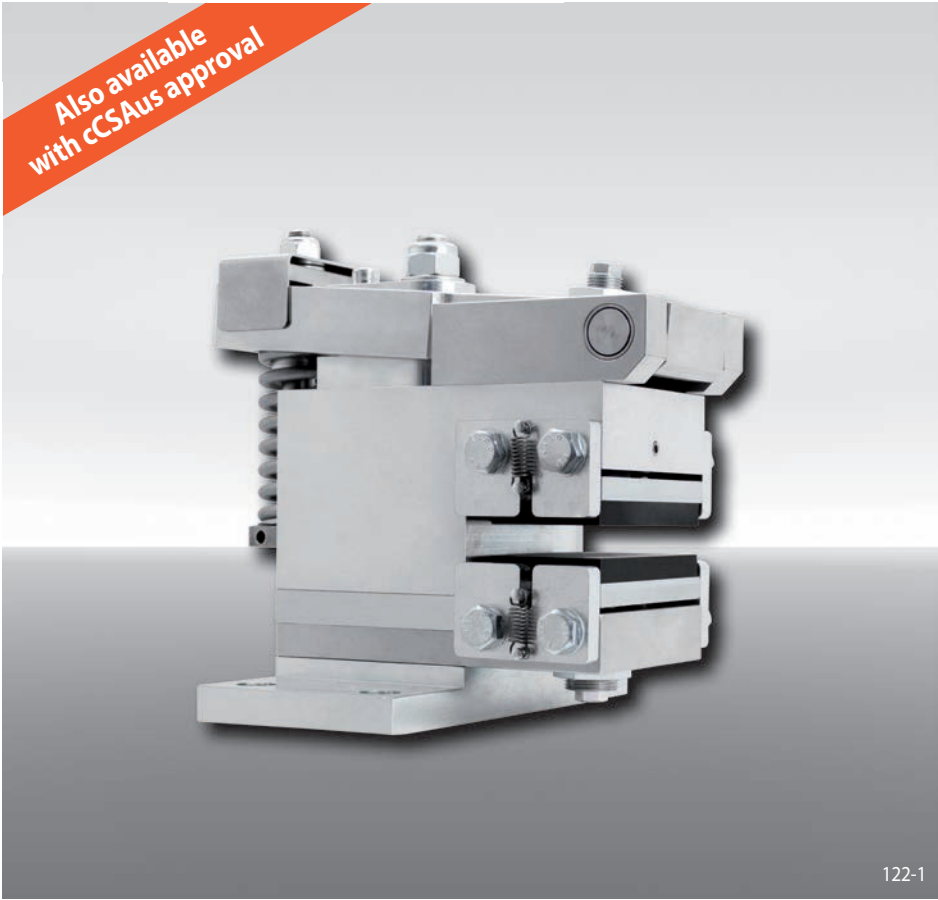

Advantages


The brake caliper EV 018 EFM or EH 018 EFM is a very compact and high efficient disc brake with very low power consumption. Its floating bearing compensates small misalignments of the brake disc. The separate electronic module (included) reduces the power consumption in closed position automatically.

Electronic module

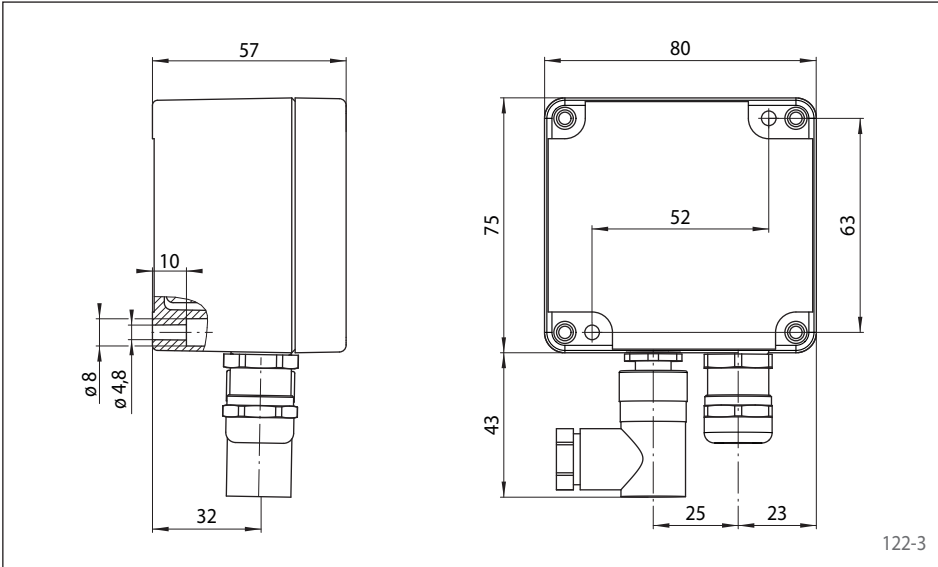

Options

- Available with cCSAus approval
- Inductive proximity switch: "Brake released", "Brake closed"-status and/or "Friction block wear adjustment necessary"

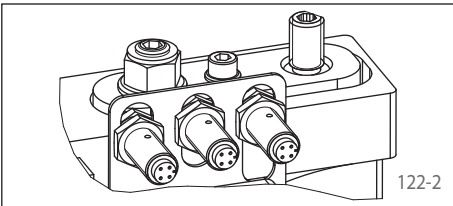

Features

Features	Code
Brake Caliper with electromagnet	E
Mounting to the machine parallel or at right angles to the brake disc	V H
Frame size 018	018
Electromagnetically activated	E
Spring released	F
Manual adjustment to accommodate friction block wear	M
Supply voltage 220 to 240 VAC	240
Supply voltage 380 to 480 VAC	480
Electromagnet mounted in central position	M
Thickness of brake disc 8 ... 15 mm	12
or 16 ... 20 mm	20

Example for ordering

Brake Caliper EV 018 EFM, supply voltage 400 VAC, electromagnet mounted in central position, thickness of brake disc 15 mm:

EV 018 EFM - 480 M - 12

Technical Data

	Brake Calipers EV 018 EFM and EH 018 EFM with supply voltage	
	220 to 240 VAC	380 to 480 VAC
Brake disc diameter	Braking torque	Braking torque
mm	Nm	Nm
125	100	
150	130	
200	200	
250	260	
300	320	
355	400	
Clamping force	3 200 N	
Clamping force or braking torque adjustable	50 - 100%	
Power consumption in closed position	24 W (100% duty factor)	32 W
Fuse rating	10 A, Type "B"	
Max. number of actuation	360/h permanent activations at 20 °C ambient temperature	
Actuation frequency*	at least 8 seconds between 2 activations	
Weight	6,5 kg	


The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.
* Shorter actuation frequency on request

Brake Calipers EV 018 EFM and EH 018 EFM




electromagnetically activated – spring released

Brake Caliper EV 018 EFM

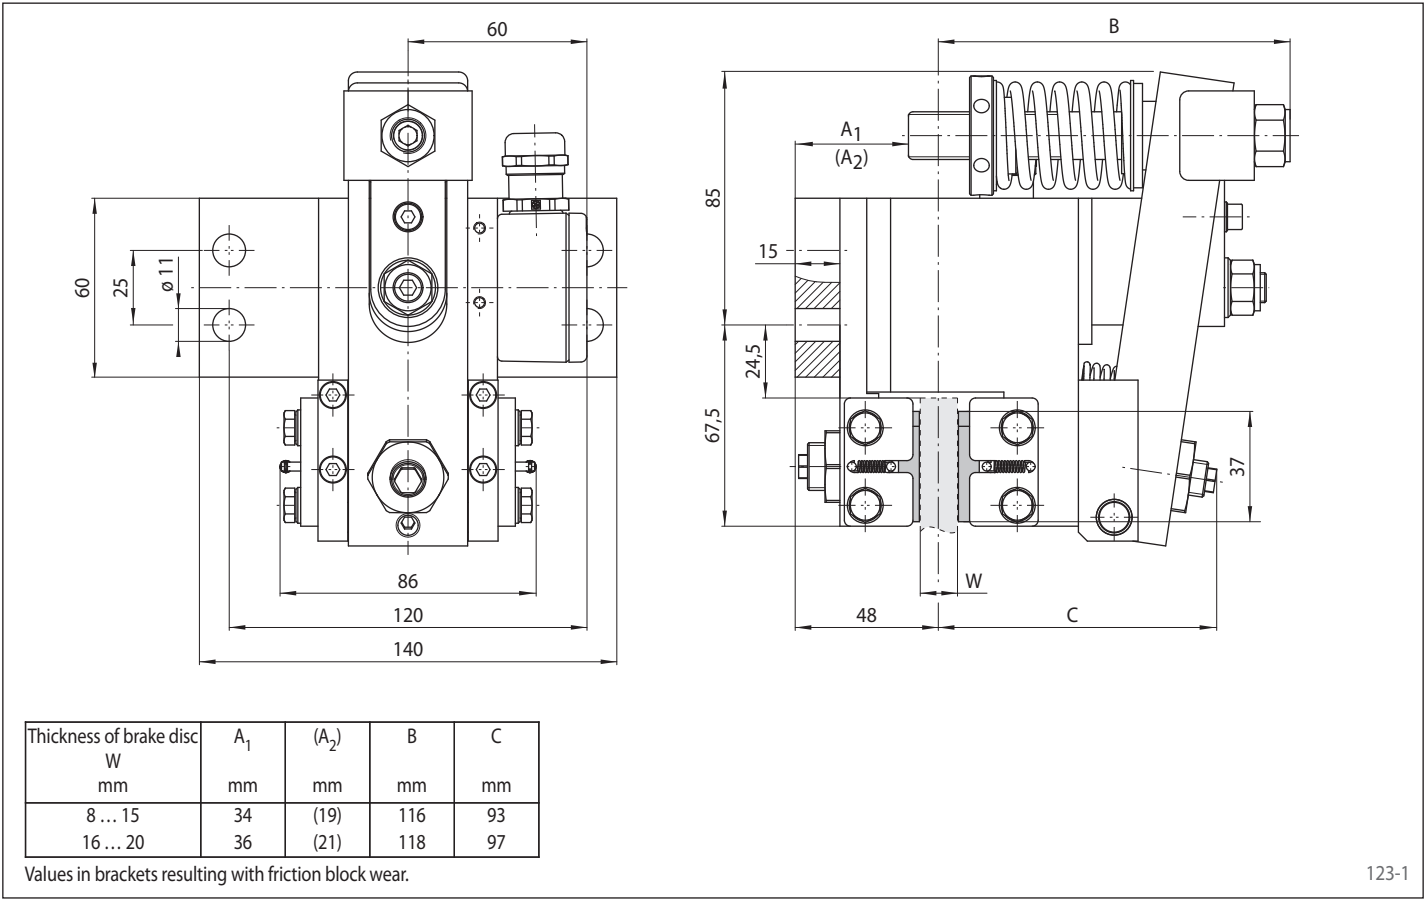


Brake Caliper EH 018 EFM

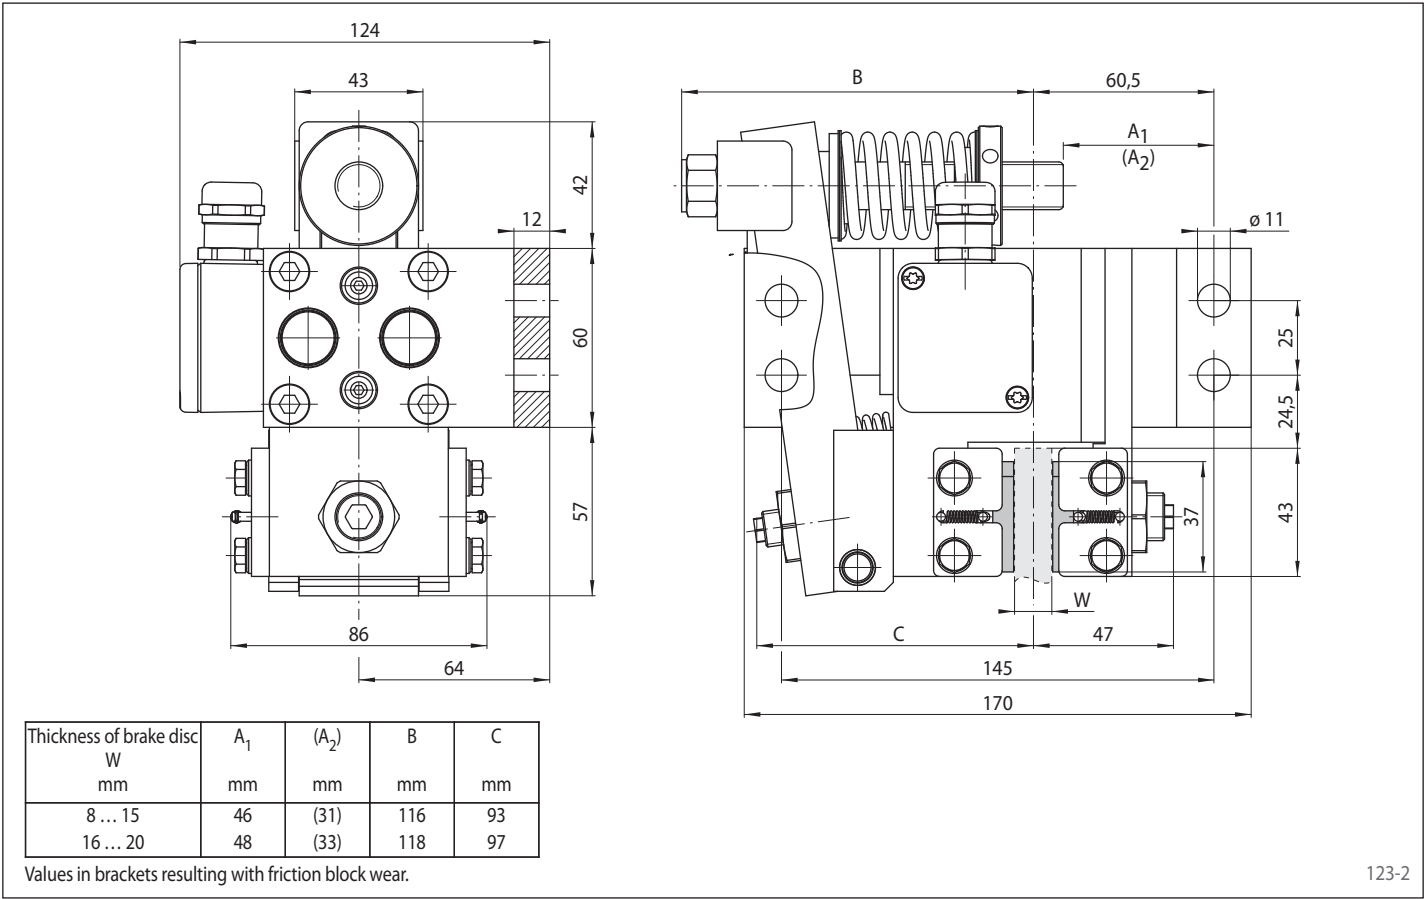

Brake Calipers EV 024 EFM and EH 024 EFM

electromagnetically activated – spring released

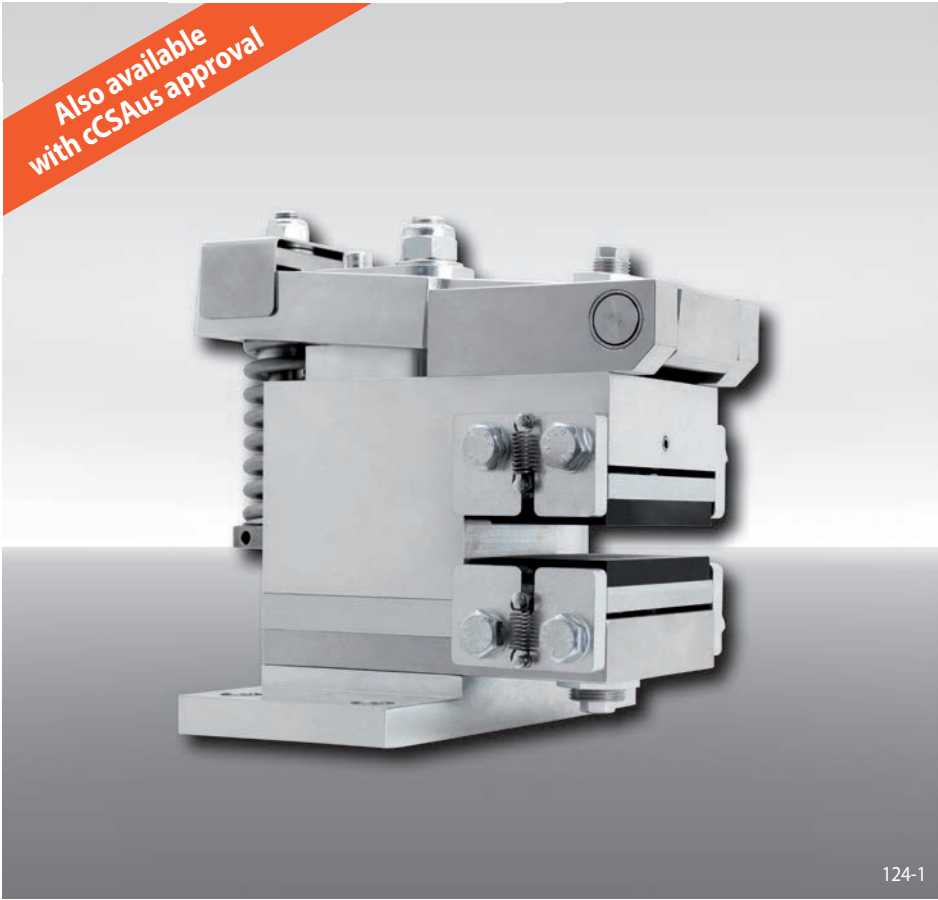

Features	Code
Brake Caliper with electromagnet	E
Mounting to the machine parallel or at right angles to the brake disc	V H
Frame size 024	024
Electromagnetically activated	E
Spring released	F
Manual adjustment to accommodate friction block wear	M
Supply voltage 220 to 240 VAC	240
Supply voltage 380 to 480 VAC	480
Electromagnet mounted in central position	M
Thickness of brake disc 10 ... 16 mm	12
or 18 ... 26 mm	25

Example for ordering

Brake Caliper EV 024 EFM, supply voltage 400 VAC, electromagnet mounted in central position, thickness of brake disc 15 mm:


EV 024 EFM - 480 M - 12

Advantages

The brake caliper EV 024 EFM or EH 024 EFM is a very compact and high efficient disc brake with very low power consumption. Its floating bearing compensates small misalignments of the brake disc. The attached electronic reduces the power consumption in closed position automatically.

Options

- Available with cCSAus approval
- Inductive proximity switch: "Brake released", "Brake closed"-status and/or "Friction block wear adjustment necessary"

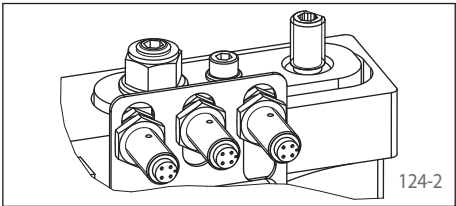

Technical Data

Brake Calipers EV 024 EFM and EH 024 EFM with supply voltage		
	220 to 240 VAC	380 to 480 VAC
Brake disc diameter	Braking torque	Braking torque
mm	Nm	Nm
250	440	
300	550	
355	670	
430	830	
520	1 030	
630	1 270	
Clamping force	5 500 N	
Clamping force or braking torque adjustable	60 - 100%	
Power consumption in closed position	20 W (100% duty factor)	20 W
Fuse rating	10 A, Type "B"	
Max. number of actuation	360/h permanent activations at 20 °C ambient temperature	
Actuation frequency*	at least 8 seconds between 2 activations	
Weight	13 kg	


The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

* Shorter actuation frequency on request


Brake Calipers EV 024 EFM and EH 024 EFM

electromagnetically activated – spring released

Brake Caliper EV 024 EFM

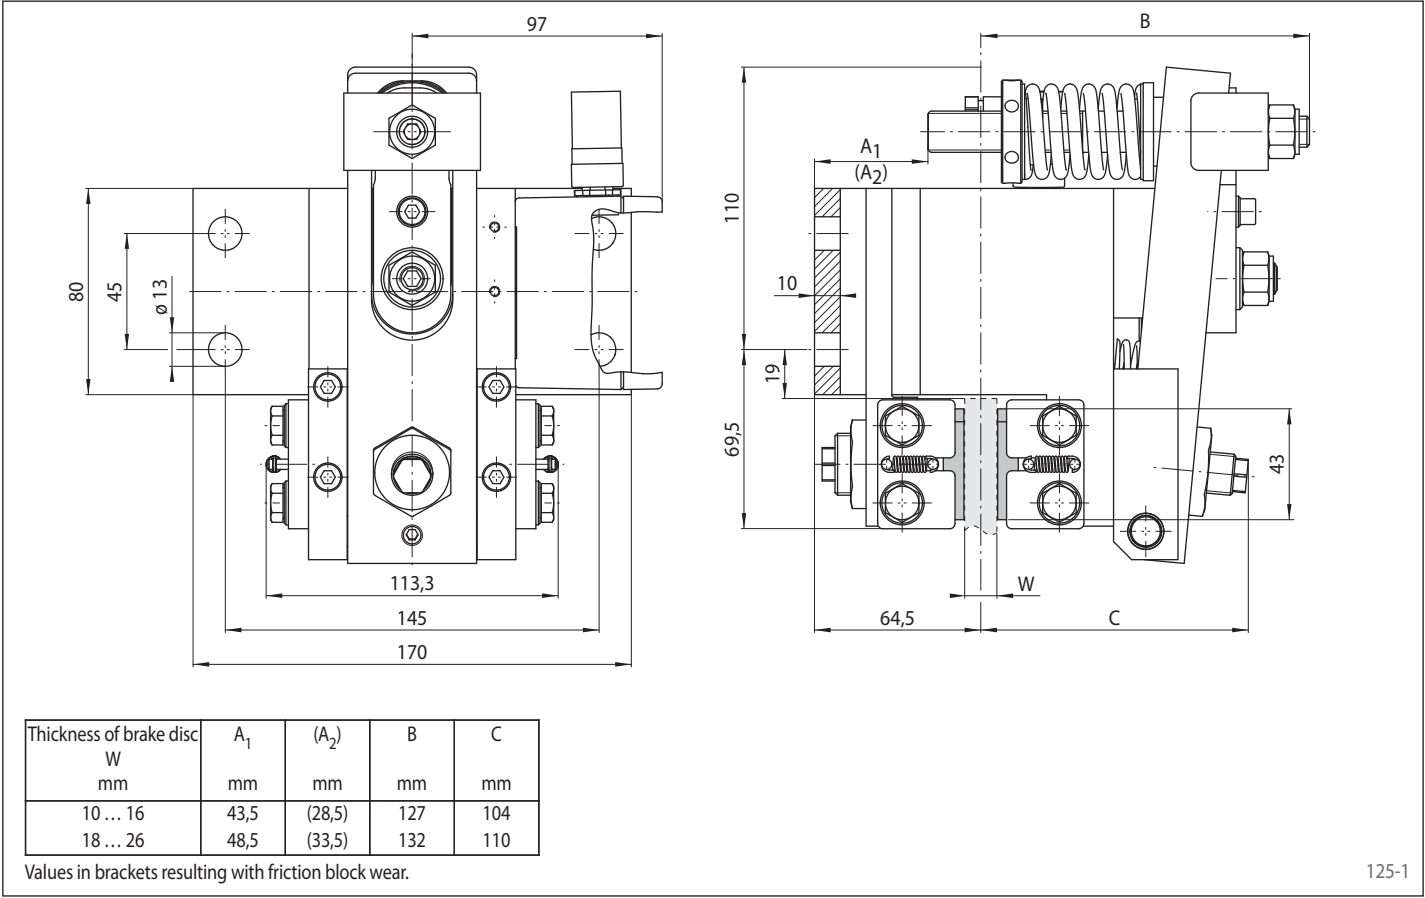


Brake Caliper EH 024 EFM

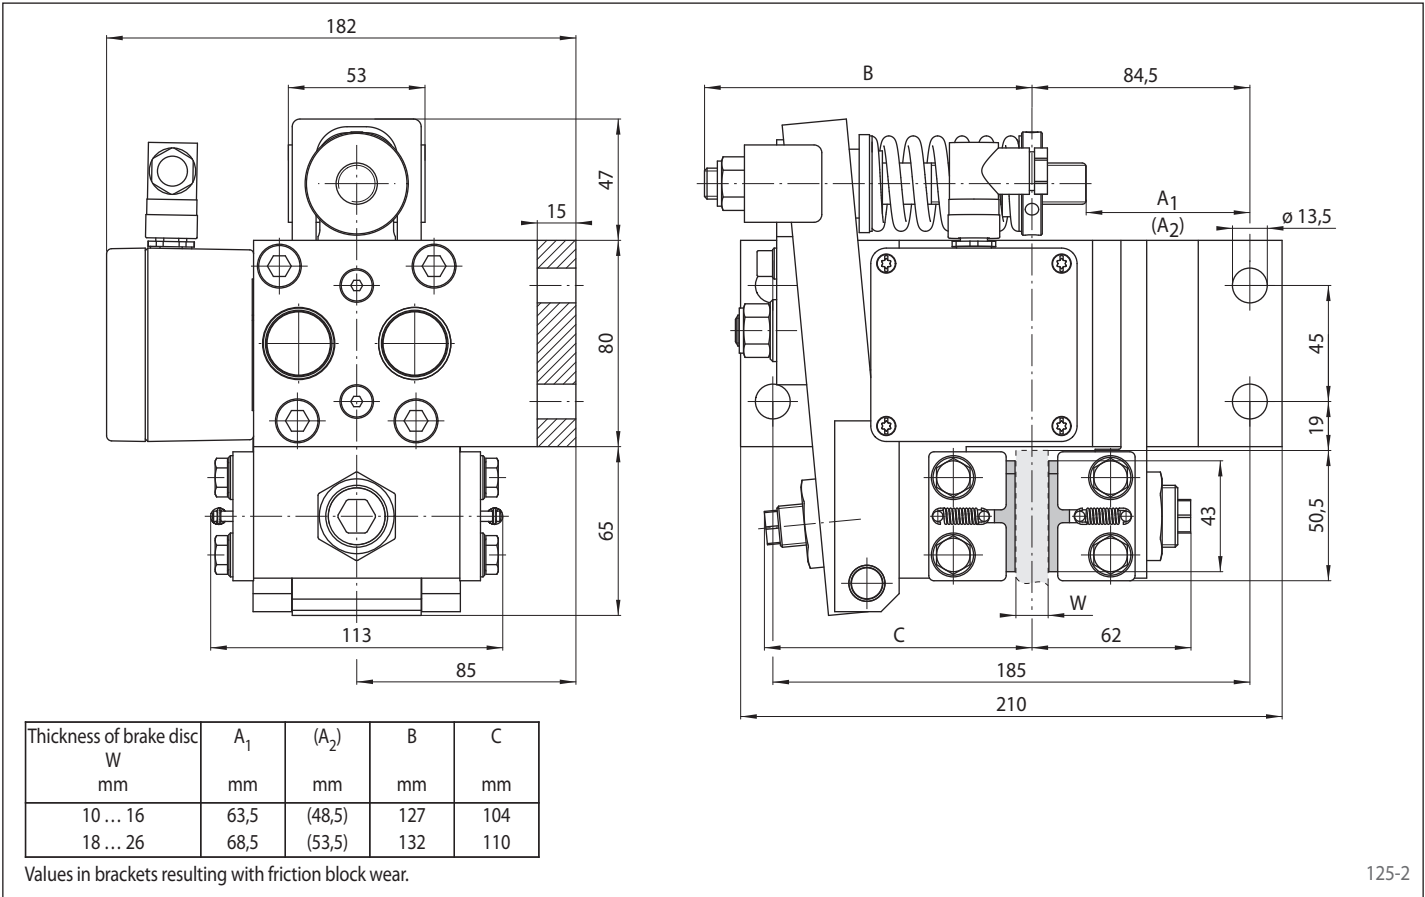

Brake Calipers EV 028 EFM and EH 028 EFM

RINGSPANN®

electromagnetically activated – spring released

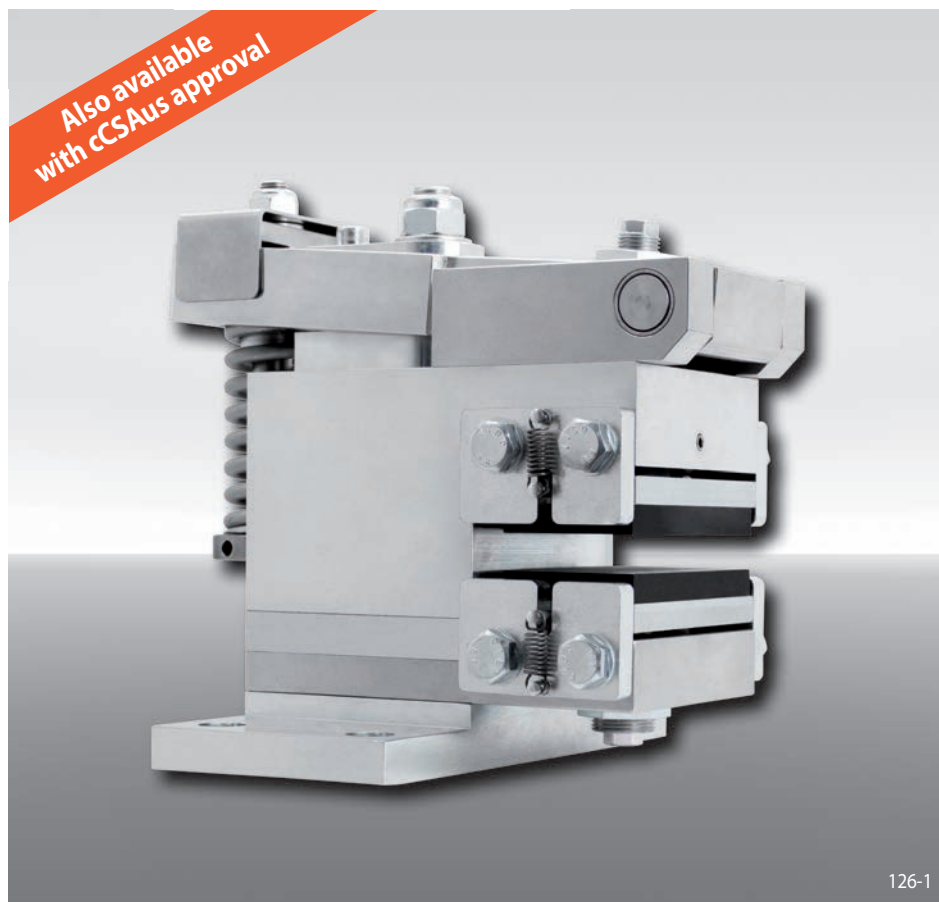

Features

Features	Code
Brake Caliper with electromagnet	E
Mounting to the machine parallel or at right angles to the brake disc	V H
Frame size 028	028
Electromagnetically activated	E
Spring released	F
Manual adjustment to accommodate friction block wear	M
Supply voltage 220 to 240 VAC	240
Supply voltage 380 to 480 VAC	480
Electromagnet mounted in central position	M
Thickness of brake disc 10 ... 16 mm	12
or 18 ... 26 mm	25

Example for ordering

Brake Caliper EV 028 EFM, supply voltage 400 VAC, electromagnet mounted in central position, thickness of brake disc 15 mm:


EV 028 EFM - 480 M - 12

Advantages

The brake caliper EV 028 EFM or EH 028 EFM is a very compact and high efficient disc brake with very low power consumption. Its floating bearing compensates small misalignments of the brake disc. The attached electronic reduces the power consumption in closed position automatically.

Options

- Available with cCSAus approval
- Inductive proximity switch: "Brake released", "Brake closed"-status and/or "Friction block wear adjustment necessary"

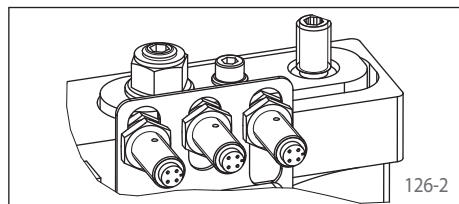

Technical Data

	Brake Calipers EV 028 EFM and EH 028 EFM with supply voltage	
	220 to 240 VAC	380 to 480 VAC
Brake disc diameter	Braking torque	Braking torque
mm	Nm	Nm
300	1 170	
355	1 450	
430	1 820	
520	2 270	
630	2 820	
710	3 220	
Clamping force	12 500 N	
Clamping force or braking torque adjustable	70 - 100%	
Power consumption in closed position	15 W	19 W (100% duty factor)
Fuse rating	10 A, Type "B"	
Max. number of actuation	360/h permanent activations at 20 °C ambient temperature	
Actuation frequency*	at least 8 seconds between 2 activations	
Weight	24 kg	

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.


* Shorter actuation frequency on request

Brake Calipers EV 028 EFM and EH 028 EFM




electromagnetically activated – spring released

Brake Caliper EV 028 EFM

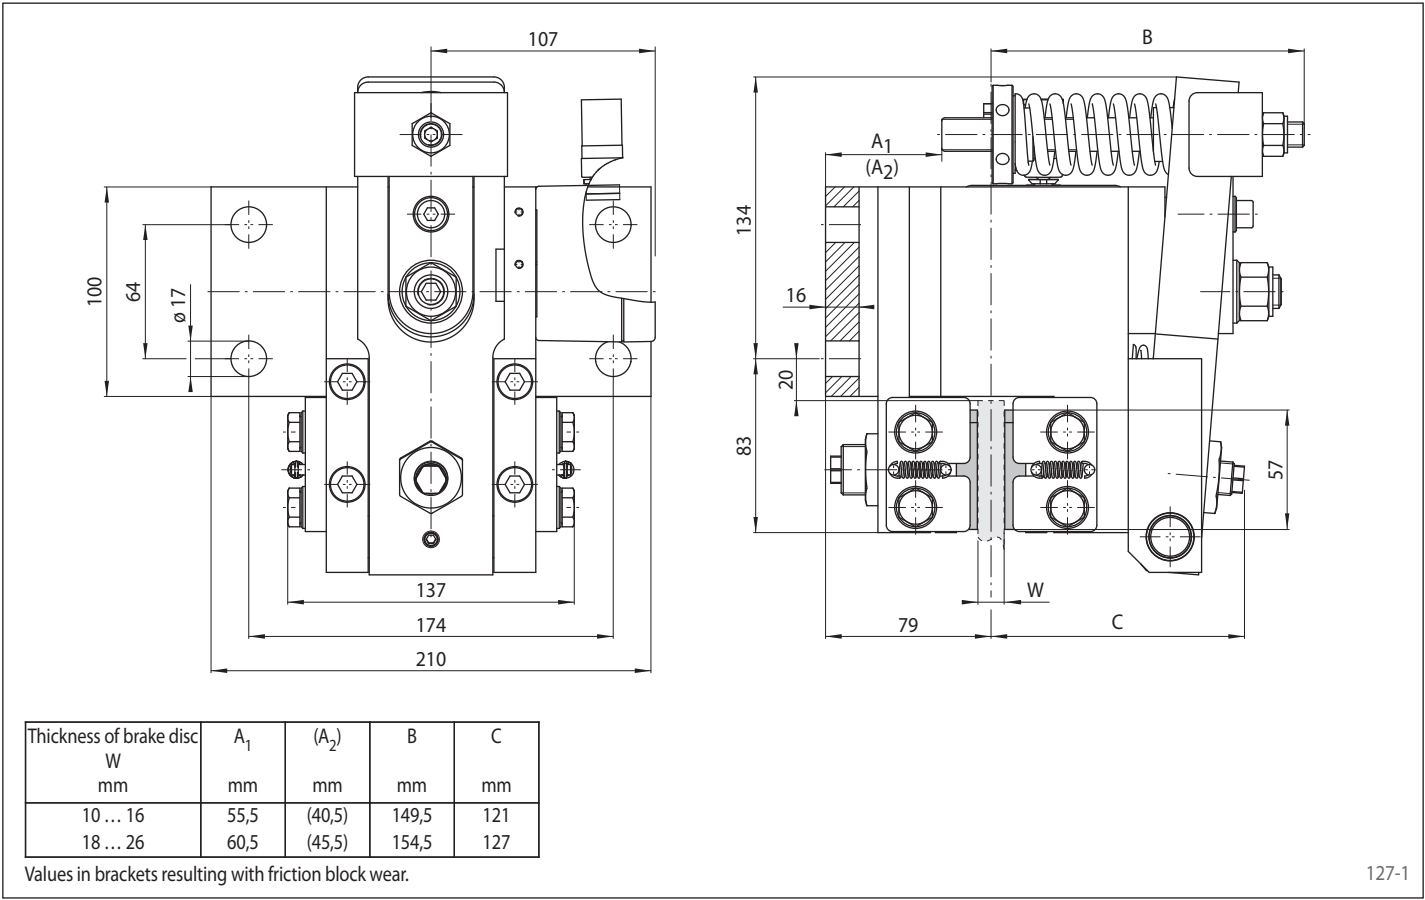


Brake Caliper EH 028 EFM

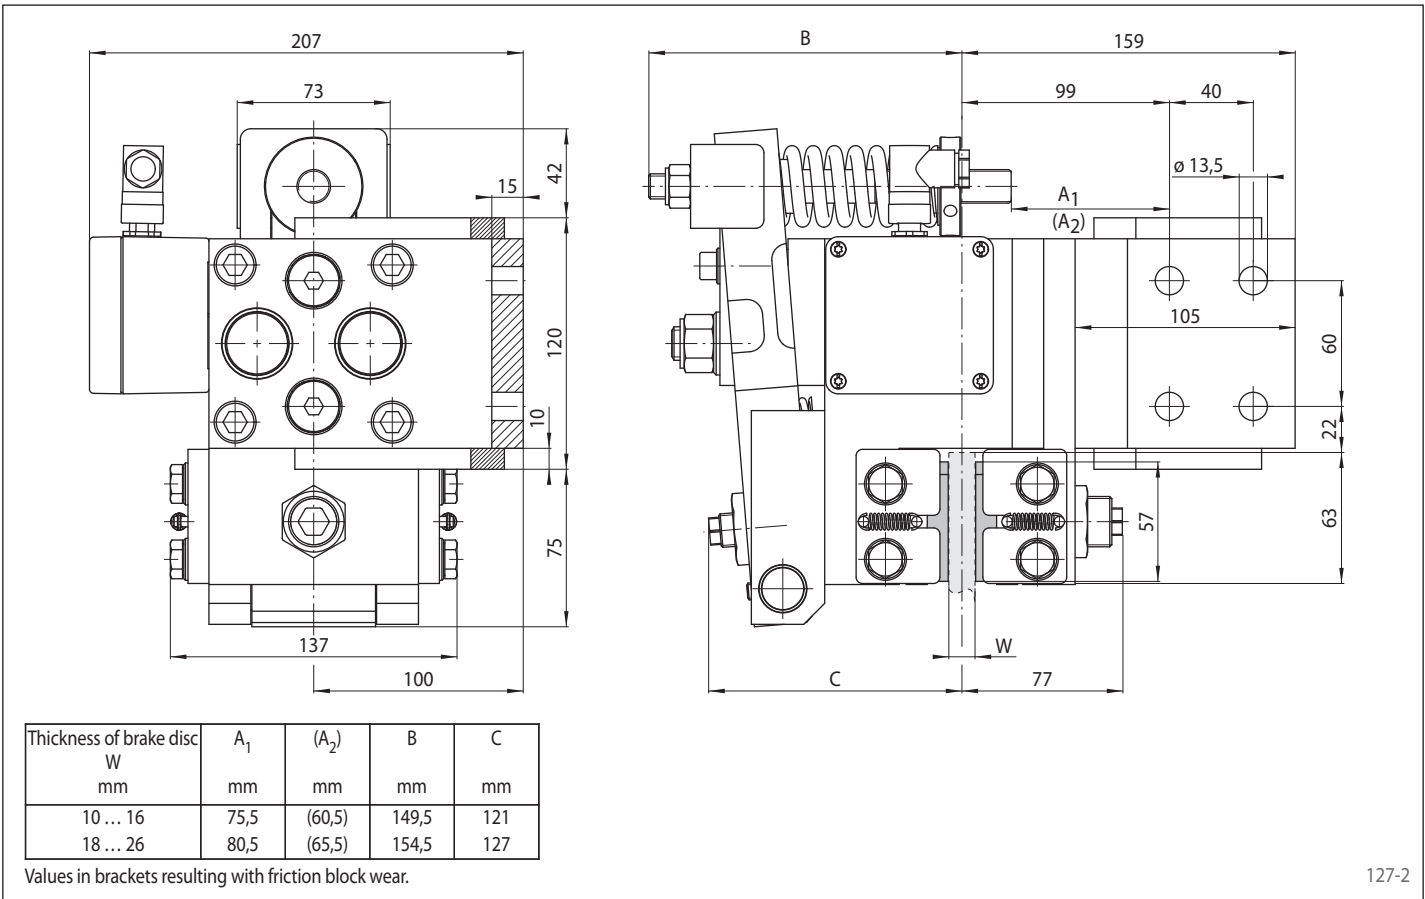

Brake Calipers EV 038 EFM and EH 038 EFM

electromagnetically activated – spring released

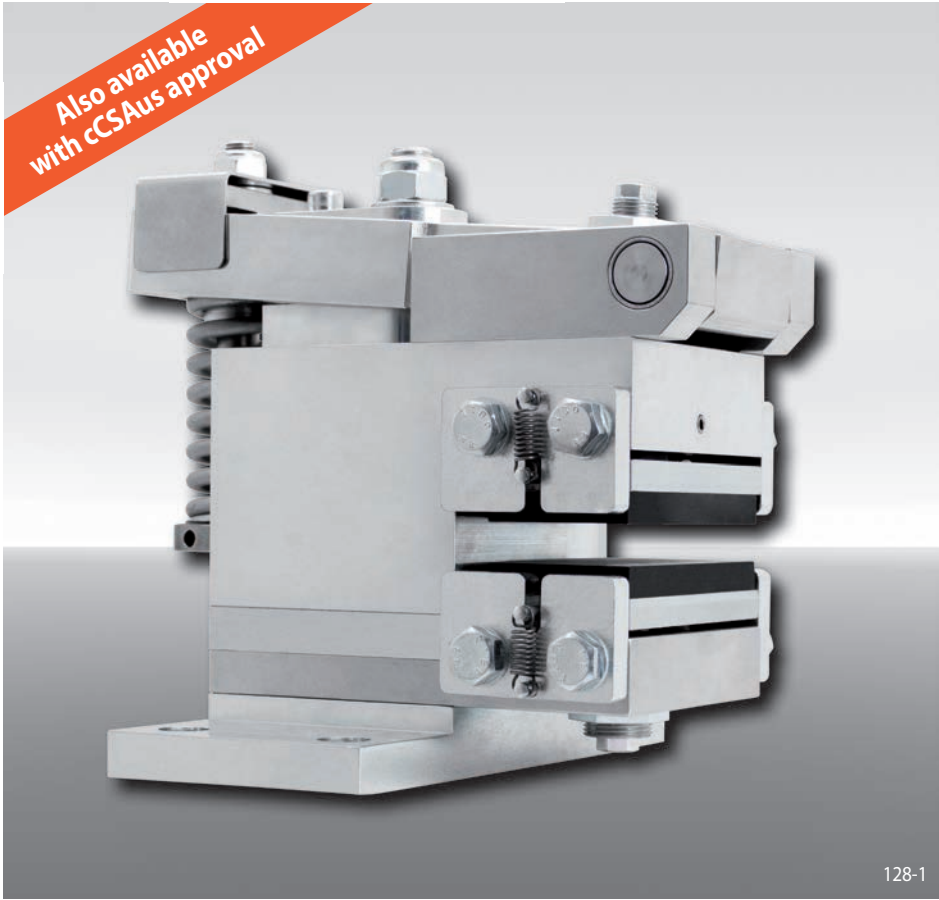

Features	Code
Brake Caliper with electromagnet	E
Mounting to the machine parallel or at right angles to the brake disc	V H
Frame size 038	038
Electromagnetically activated	E
Spring released	F
Manual adjustment to accommodate friction block wear	M
Supply voltage 220 to 240 VAC	240
Supply voltage 380 to 480 VAC	480
Electromagnet mounted in central position	M
Thickness of brake disc 12,5 ... 20 mm	12
or 22 ... 30 mm	25

Example for ordering

Brake Caliper EV 038 EFM, supply voltage 400 VAC, electromagnet mounted in central position, thickness of brake disc 25 mm:


EV 038 EFM - 480 M - 25

Advantages

The brake caliper EV 038 EFM or EH 038 EFM is a very compact and high efficient disc brake with very low power consumption. Its floating bearing compensates small misalignments of the brake disc. The attached electronic reduces the power consumption in closed position automatically.

Options

- Available with cCSAus approval
- Inductive proximity switch: "Brake released", "Brake closed"-status and/or "Friction block wear adjustment necessary"

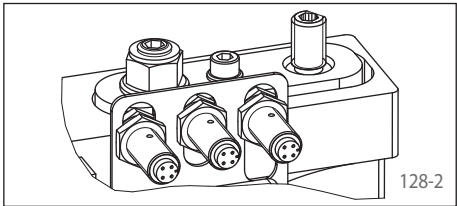

Technical Data

Brake Calipers EV 038 EFM and EH 038 EFM with supply voltage		
	220 to 240 VAC	380 to 480 VAC
Brake disc diameter	Braking torque	Braking torque
mm	Nm	Nm
430	3 400	
520	4 250	
630	5 320	
710	6 090	
800	6 950	
900	7 910	
Clamping force	24 000 N	
Clamping force or braking torque adjustable	70 - 100%	
Power consumption in closed position	20 W	24 W (100% duty factor)
Fuse rating	10 A, Type "B"	
Max. number of actuation	360/h permanent activations at 20 °C ambient temperature	
Actuation frequency*	at least 8 seconds between 2 activations	
Weight	50 kg	

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.


* Shorter actuation frequency on request

Brake Calipers EV 038 EFM and EH 038 EFM




electromagnetically activated – spring released

Brake Caliper EV 038 EFM

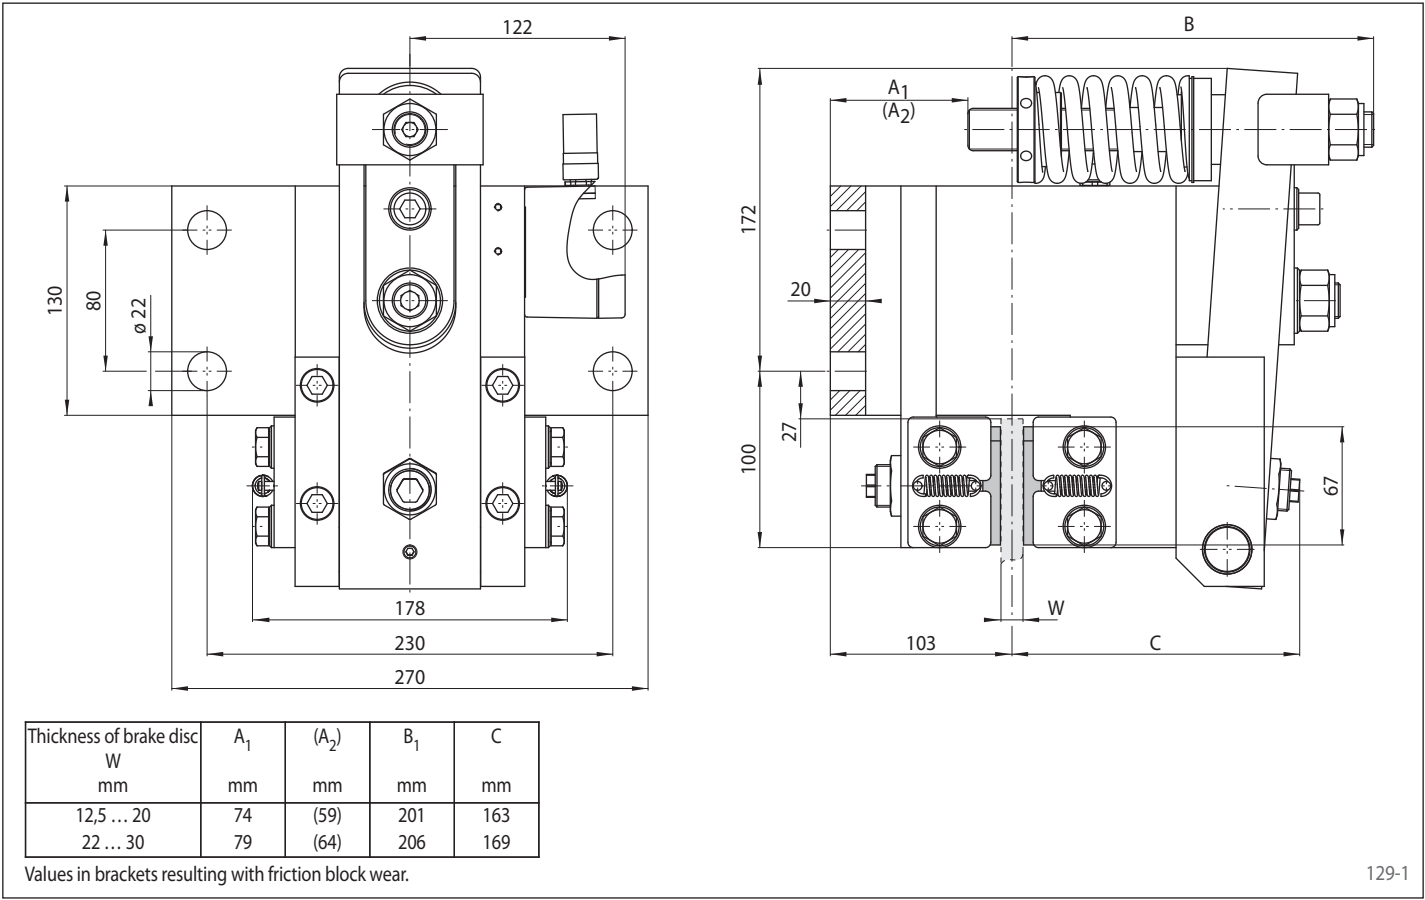

129-1

Brake Caliper EH 038 EFM

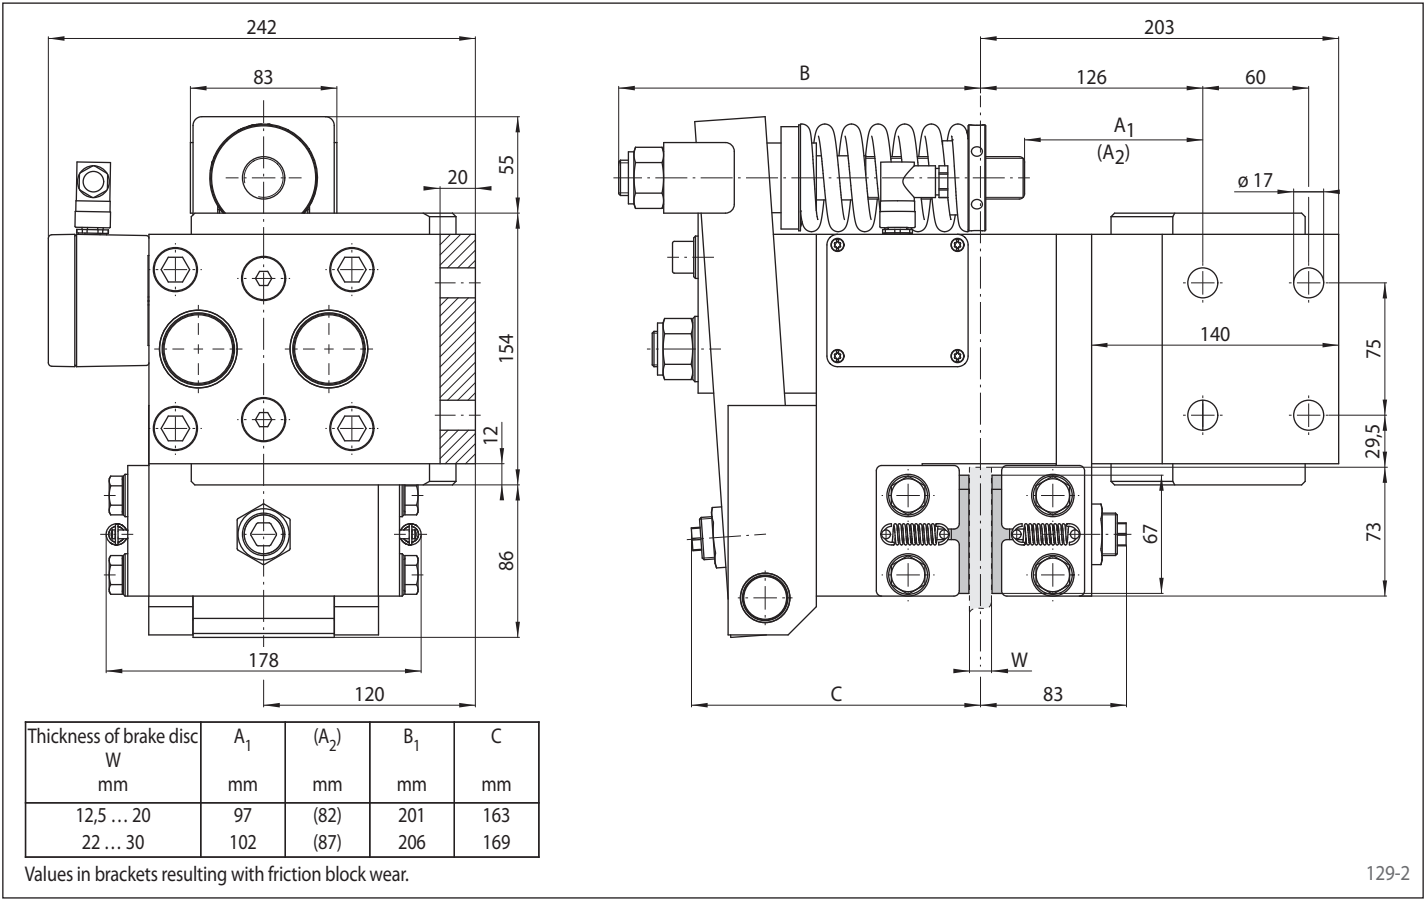


129-2

Handwriting practice area with 20 horizontal lines.

Graph paper area with a grid of 20 columns and 20 rows.

Brake Caliper DH 010 MSM

manually activated – manually released
with hand wheel

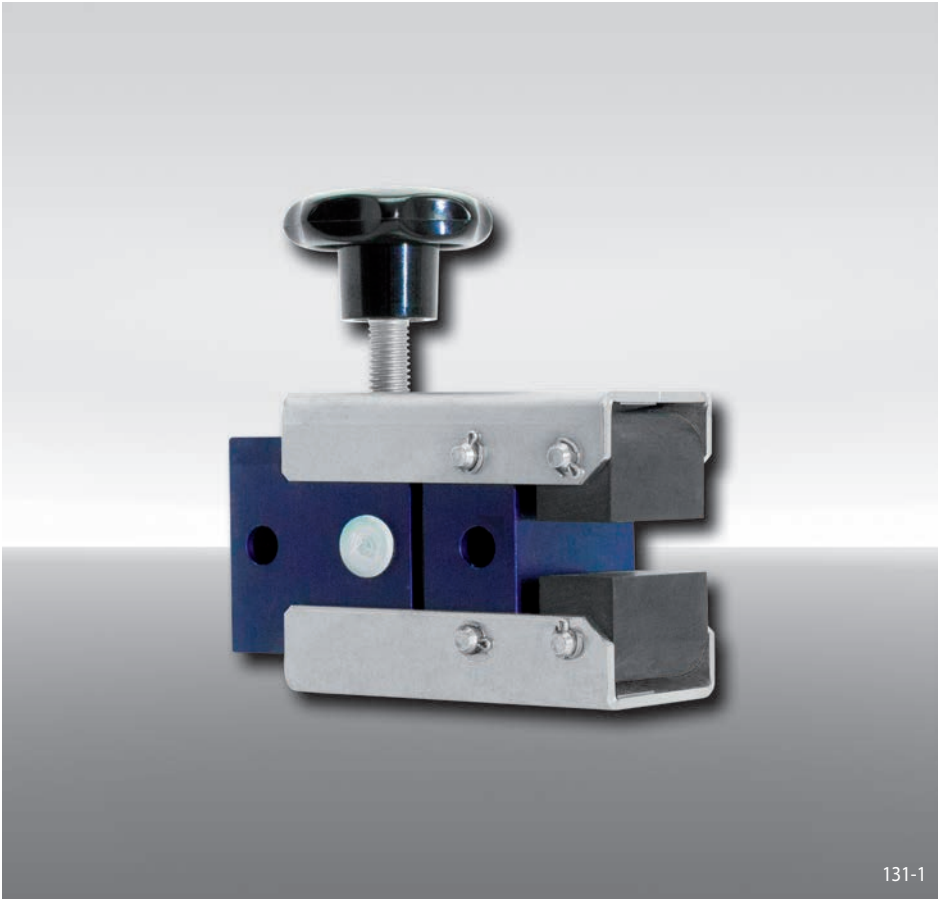


131-1

Features	Code
Brake Caliper	D
Mounting to the machine at right angles to the brake disc	H
Frame size 010	010
Manually activated	M
Manually released	S
Manual adjustment to accommodate friction block wear	M
Hand wheel 710	710
Hand wheel mounted right or left available	R L
Thickness of brake disc 12,5 mm	12

Example for ordering

Brake Caliper DH 010 MSM, hand wheel 710, hand wheel mounted right, thick-ness of brake disc 12,5 mm:

DH 010 MSM - 710 R - 12

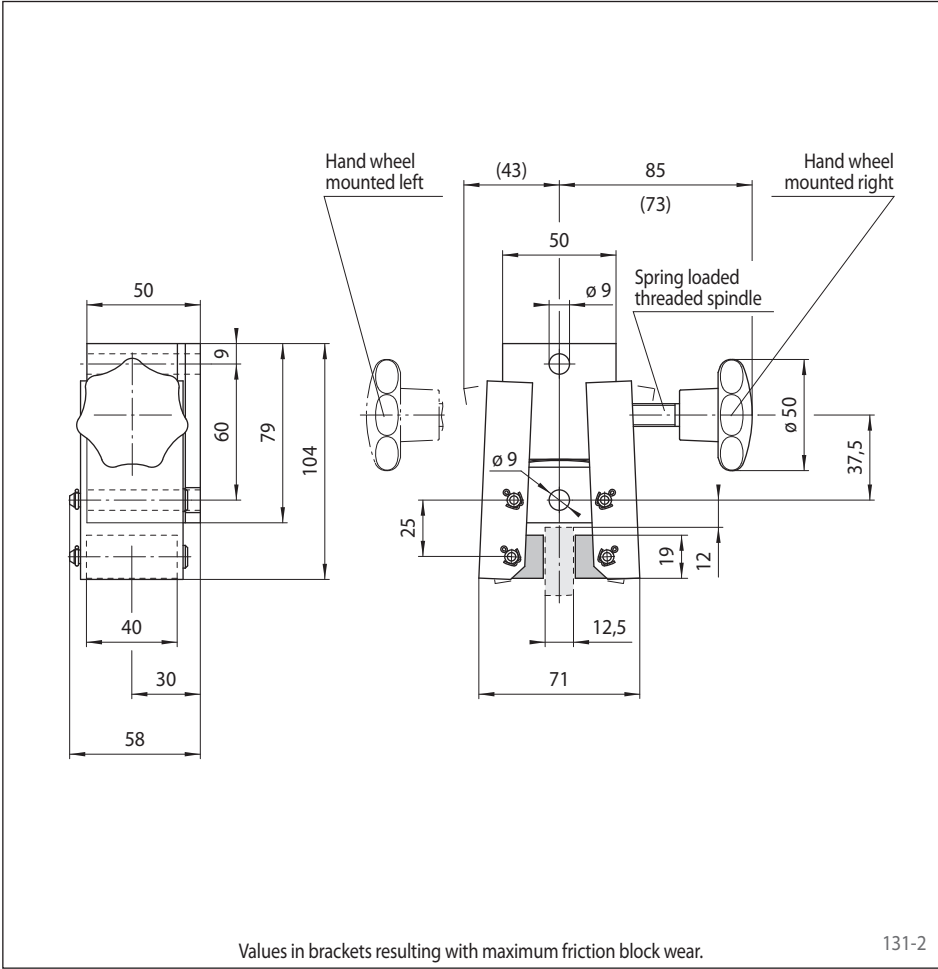

Values in brackets resulting with maximum friction block wear.

131-2

Technical Data


Brake Caliper DH 010 MSM with hand wheel 710	
Brake disc diameter	Braking torque
mm	Nm
125	20
150	30
200	40
250	50
300	60
355	75
Clamping force	576 N
Weight	1,1 kg

The braking torques shown in the table are based on a theo-retical friction coefficient of 0,4. The maximum braking torques are based on an operating torque of 0,8 Nm at the hand wheel.

A spring loaded threaded spindle compensates for wear of the friction block during the braking action.

Brake Caliper DV 020 MSM

manually activated – manually released
with hand wheel

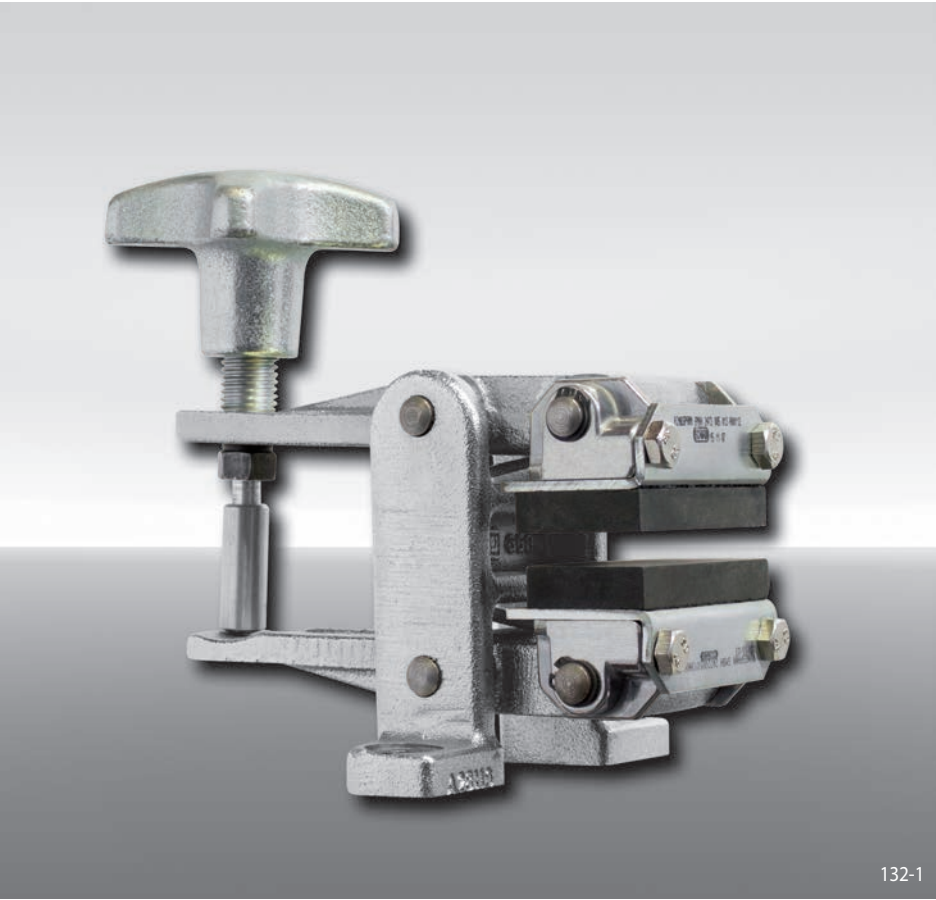

132-1

Features	Code
Brake Caliper	D
Mounting to the machine parallel to the brake disc	V
Frame size 020	020
Manually activated	M
Manually released	S
Manual adjustment to accommodate friction block wear	M
Hand wheel 720	720
Hand wheel mounted right or left available	R L
Thickness of brake disc 12,5 mm	12

Example for ordering

Brake Caliper DV 020 MSM, hand wheel
720, hand wheel mounted right, thick-
ness of brake disc 12,5 mm:


DV 020 MSM - 720 R - 12

Technical Data

Brake Caliper DV 020 MSM with hand wheel 720	
Brake disc diameter	Braking torque
mm	Nm
200	160
250	215
300	270
355	335
430	420
520	520
Clamping force	2800 N
Weight	4,8 kg

The braking torques shown in the table are based on a theo-
retical friction coefficient of 0,4. The maximum braking torques
are based on an operating torque of 7,7 Nm at the hand wheel.

A spring loaded threaded spindle compensates
for wear of the friction block during the braking
action.

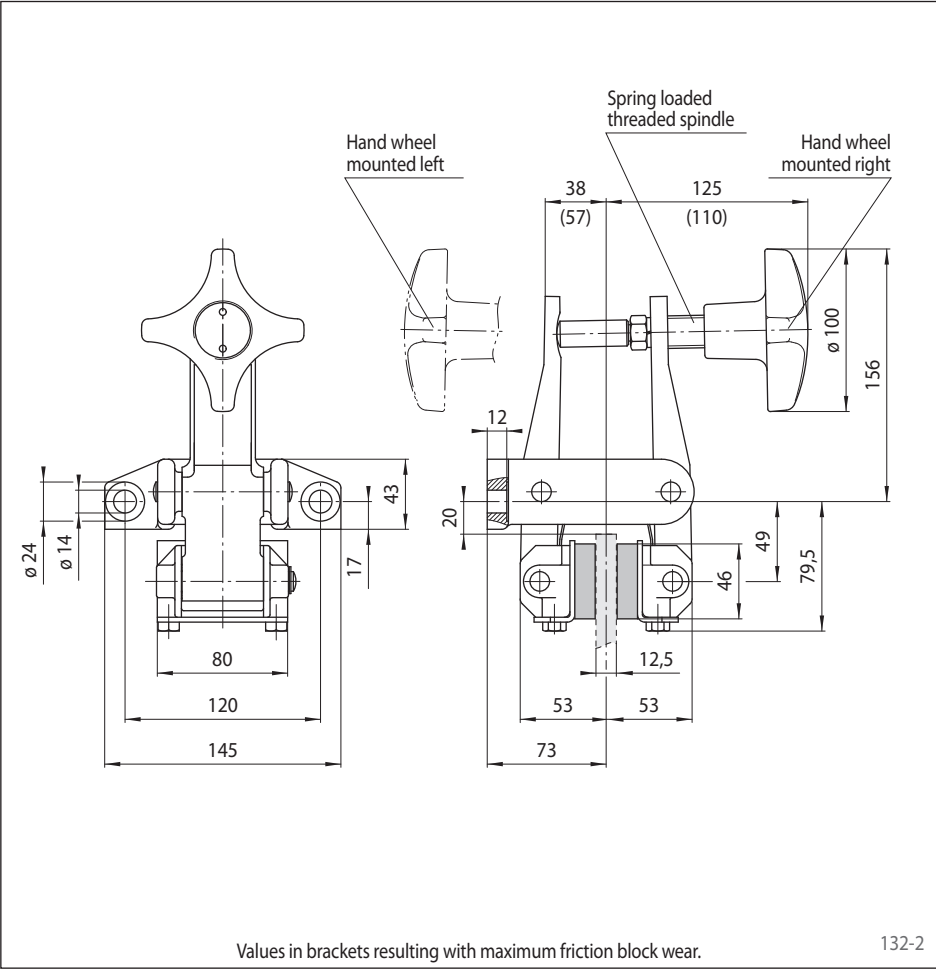


Values in brackets resulting with maximum friction block wear.


132-2

Brake Caliper DH 020 MSM

manually activated – manually released
with hand wheel

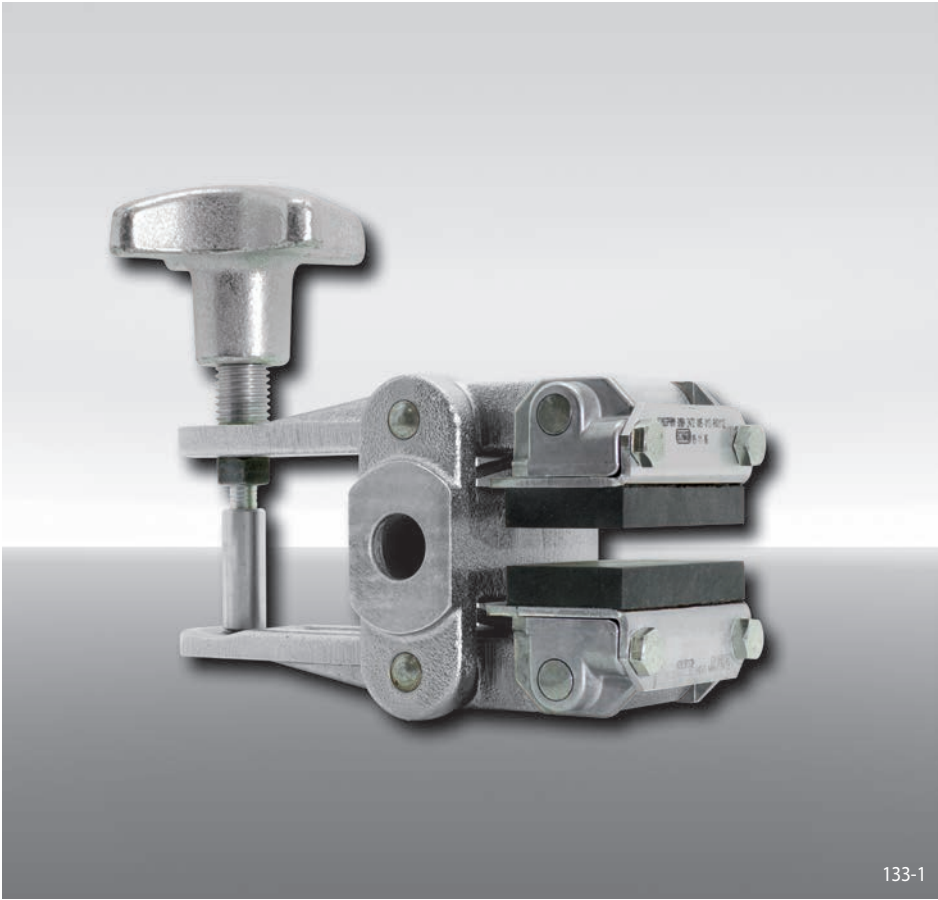

133-1

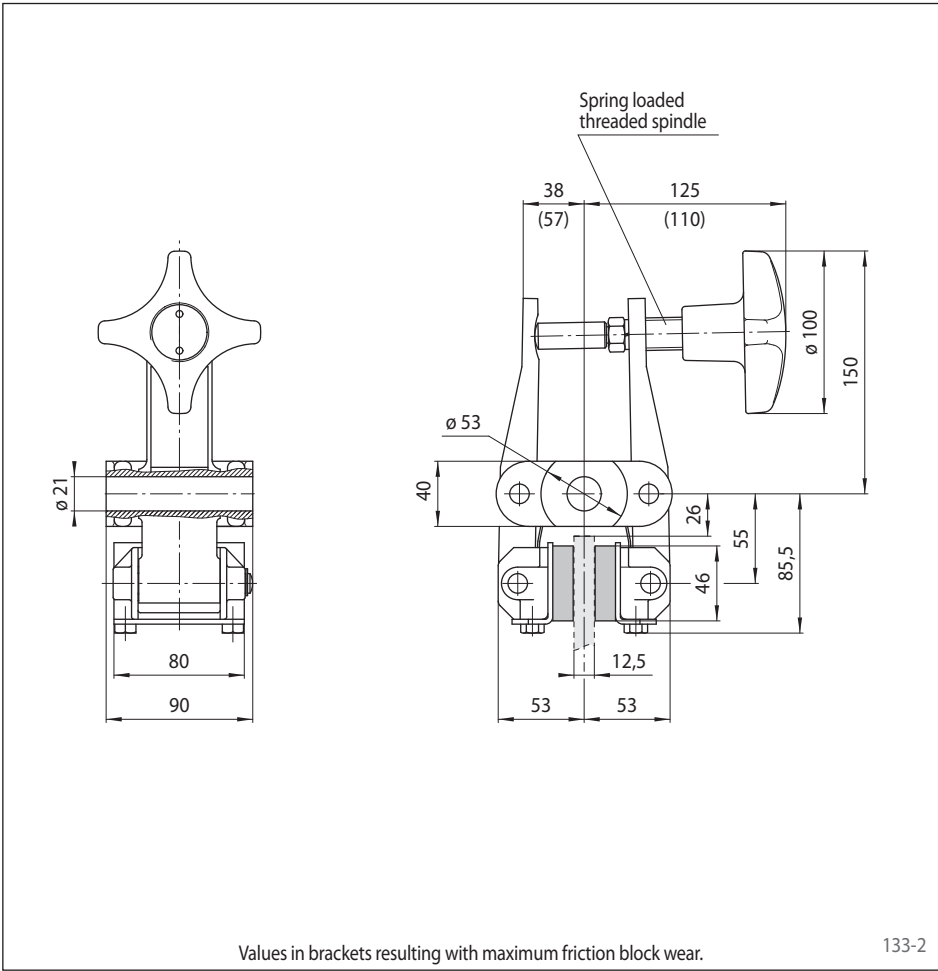

Values in brackets resulting with maximum friction block wear.

133-2

Features	Code
Brake Caliper	D
Mounting to the machine at right angles to the brake disc	H
Frame size 020	020
Manually activated	M
Manually released	S
Manual adjustment to accommodate friction block wear	M
Hand wheel 720	720
Position of the hand wheel to the right or left can be defined by turning the brake during installation	U
Thickness of brake disc 12,5 mm	12

Example for ordering

Brake Caliper DH 020 MSM, hand wheel 720, position of the hand wheel can be to the right or left, thickness of brake disc 12,5 mm:

DH 020 MSM - 720 U - 12

Technical Data

Brake Caliper DH 020 MSM with hand wheel 720	
Brake disc diameter mm	Braking torque Nm
200	160
250	215
300	270
355	335
430	420
520	520
Clamping force	2800 N
Weight	4,8 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4. The maximum braking torques are based on an operating torque of 7,7 Nm at the hand wheel.

A spring loaded threaded spindle compensates for wear of the friction block during the braking action.


**manually activated – manually released
by Pull Cable**

134-1

Brake Caliper	D
Mounting to the machine parallel to the brake disc	V
Frame size 020	020
Manually activated	M
Manually released	K
Manual adjustment to accommodate friction block wear	M
Spring-loaded pressure pin 730	730
Pull Cable installation mounted right or left available	R L
Thickness of brake disc 12,5 mm	12

Brake Caliper DV 020 MKM, pressure pin 730, Pull Cable installation mounted right, thickness of brake disc 12,5 mm:


Technical Data

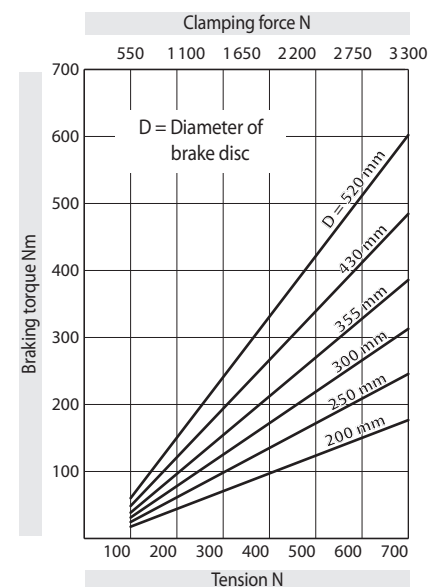

Weight: 5,1 kg


The Brake Caliper can be delivered fully assembled with RCS® Pull Cable and Hand Brake Lever. Please indicate the required cable length.

A spring loaded pressure pin compensates for wear of the friction block during the braking action.

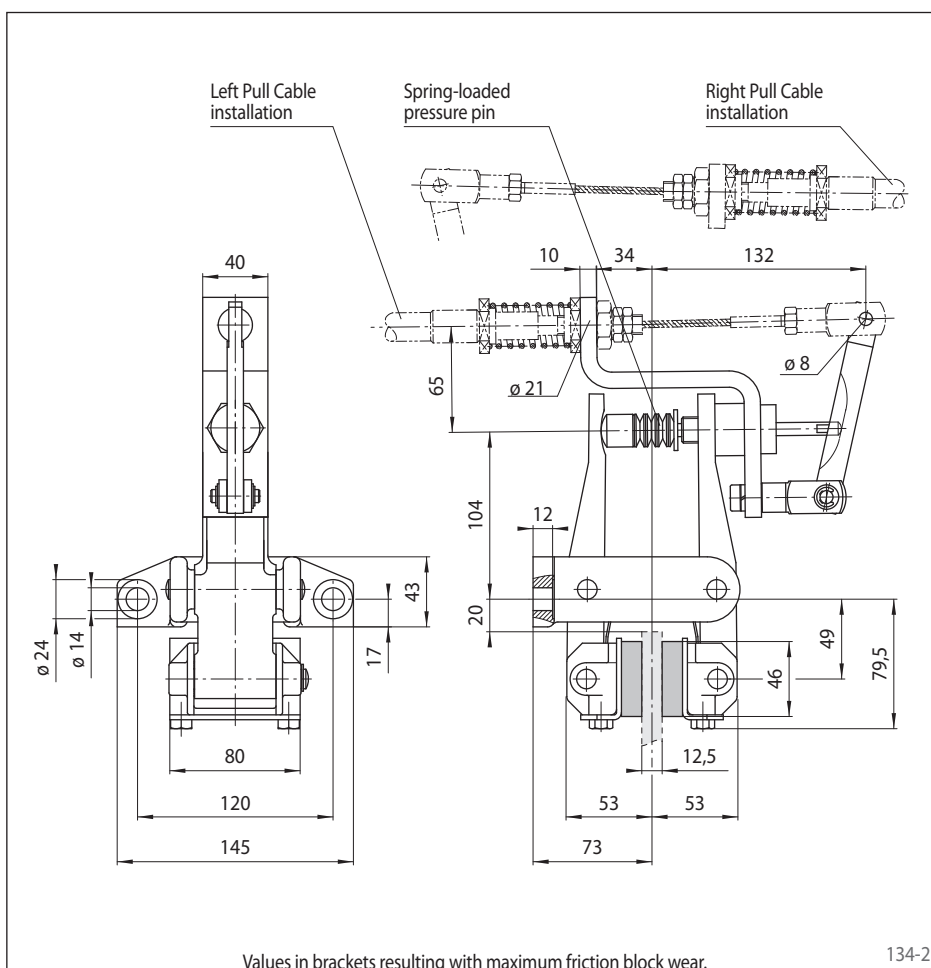

Brake Caliper DH 020 MKM

manually activated – manually released
by Pull Cable

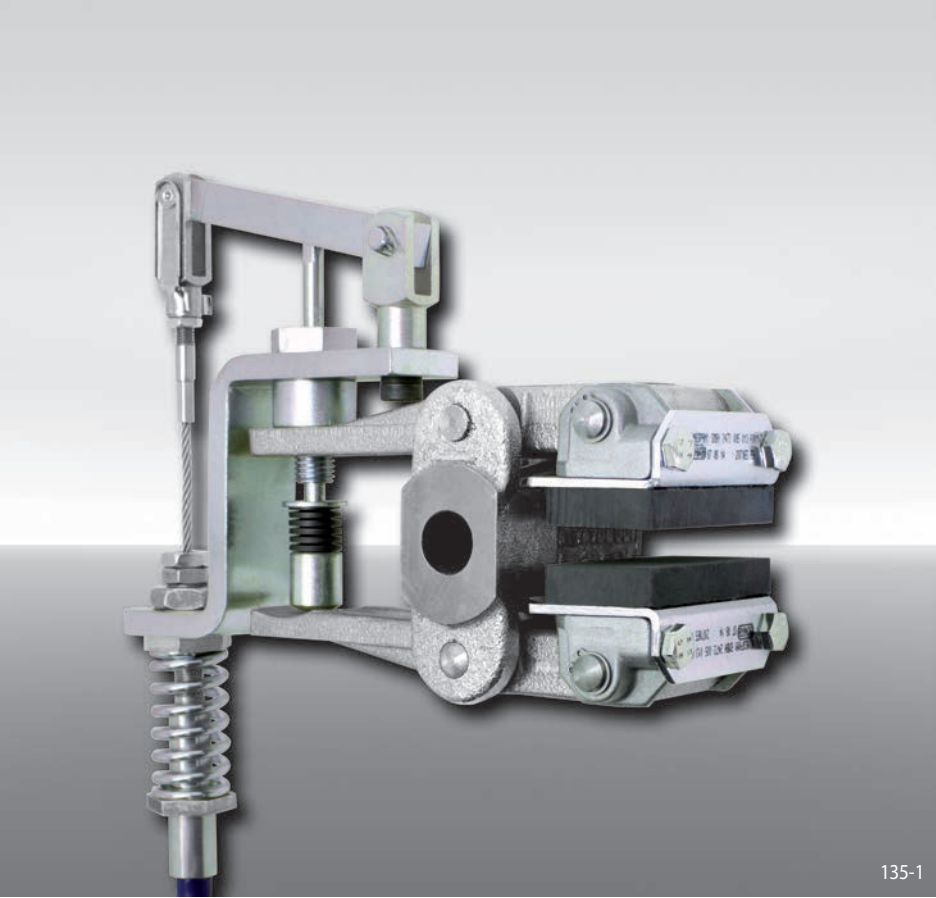

135-1


Features	Code
Brake Caliper	D
Mounting to the machine at right angles to the brake disc	H
Frame size 020	020
Manually activated	M
Manually released	K
Manual adjustment to accommodate friction block wear	M
Spring-loaded pressure pin 730	730
Position of the Pull Cable installation to the right or left can be defined by turning the brake during installation	U
Thickness of brake disc 12,5 mm	12

Example for ordering

Brake Caliper DH 020 MKM, pressure pin 730, position of the Pull Cable installation can be to the right or left, thickness of brake disc 12,5 mm:

DH 020 MKM - 730 U - 12

Technical Data

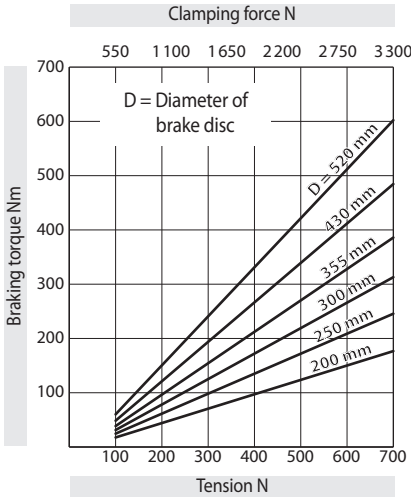

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.


Weight: 5,1 kg

Accessories

The Brake Caliper can be delivered fully assembled with RCS® Pull Cable and Hand Brake Lever. Please indicate the required cable length.

For further information regarding RCS® Pull Cable and Hand Brake Lever see page 185.

A spring loaded pressure pin compensates for wear of the friction block during the braking action.

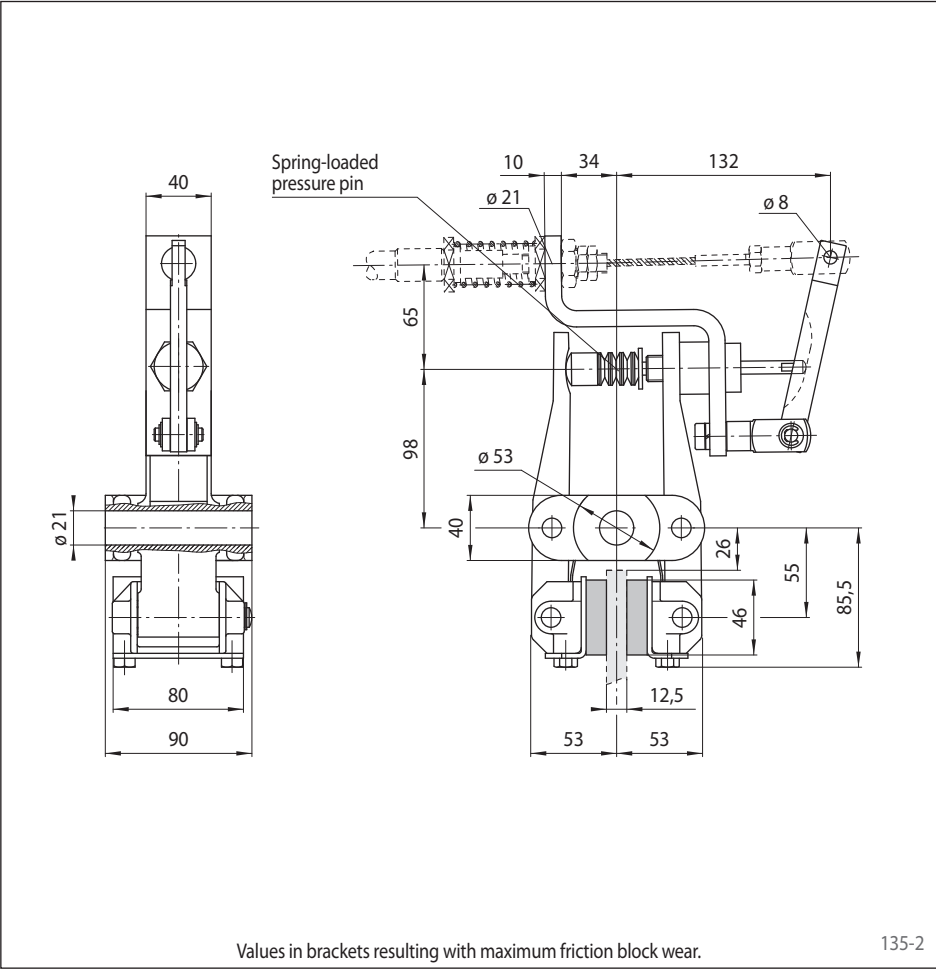


Values in brackets resulting with maximum friction block wear.

135-2

Brake Caliper HS 075 FHM

spring activated – hydraulically released
for wind turbines or conveyor systems

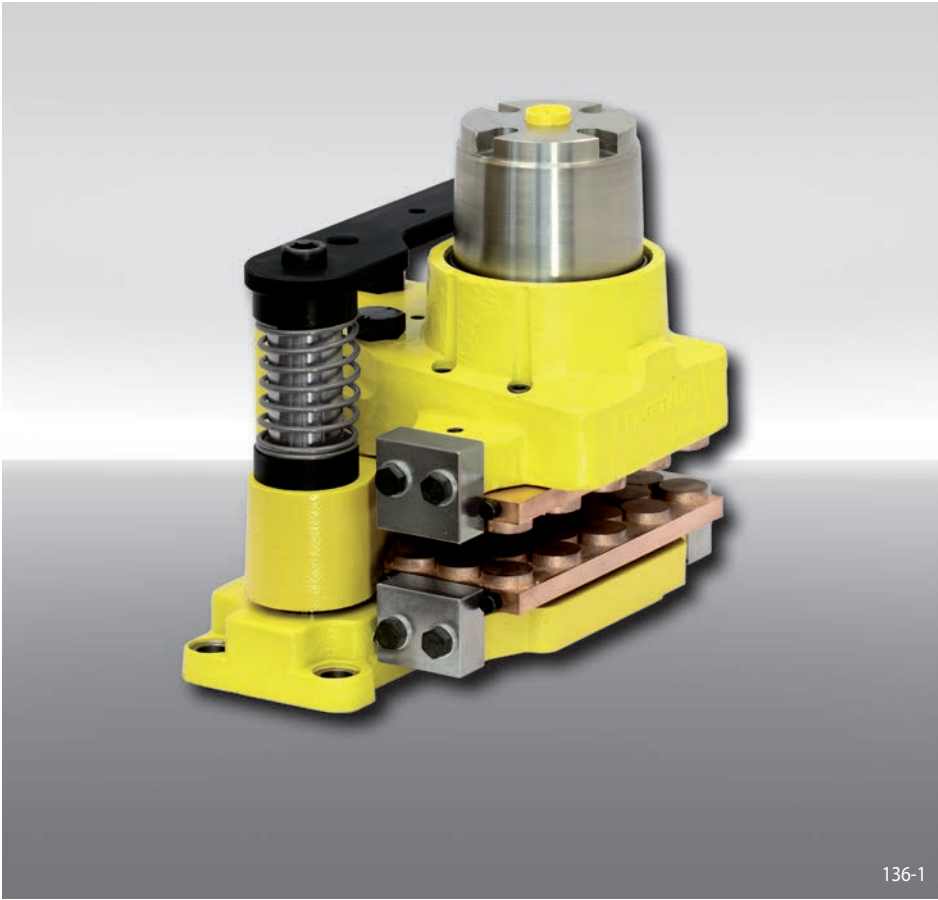

Features	Code
Brake Caliper	H
Floating caliper	S
With piston diameter 75 mm	075
Spring activated	F
Hydraulically released	H
Manual adjustment to accommodate friction block wear	M
Spring packages available for clamping forces of 10 kN, 20 kN, 30 kN, 40 kN or 55 kN	010 to 055
Example for ordering Brake Caliper HS 075 FHM, spring package for clamping force 10 kN:	
HS 075 FHM - 010	


Technical Data

	Brake Caliper HS 075 FHM				
	with spring package 010	with spring package 020	with spring package 030	with spring package 040	with spring package 055
Brake disc diameter	Braking torque	Braking torque	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm	Nm	Nm
520	1 500	3 000	4 400	5 900	8 100
630	1 900	3 800	5 700	7 600	10 400
710	2 200	4 400	6 600	8 800	12 100
900	3 000	5 900	8 900	11 900	16 300
1 250	4 400	8 700	13 100	17 500	24 000
1 600	5 800	11 500	17 300	23 100	31 800
2 000	7 400	14 700	22 100	29 500	40 500
Clamping force	10 kN	20 kN	30 kN	40 kN	55 kN
Oil pressure	min. 25 bar max. 140 bar	min. 50 bar max. 140 bar	min. 70 bar max. 140 bar	min. 95 bar max. 140 bar	min. 125 bar max. 140 bar
Oil volume	max. 82 cm ³	max. 82 cm ³	max. 82 cm ³	max. 82 cm ³	max. 82 cm ³
Weight	95 kg	95 kg	95 kg	95 kg	95 kg




The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Brake Caliper HS 075 FHM

spring activated – hydraulically released
for wind turbines or conveyor systems

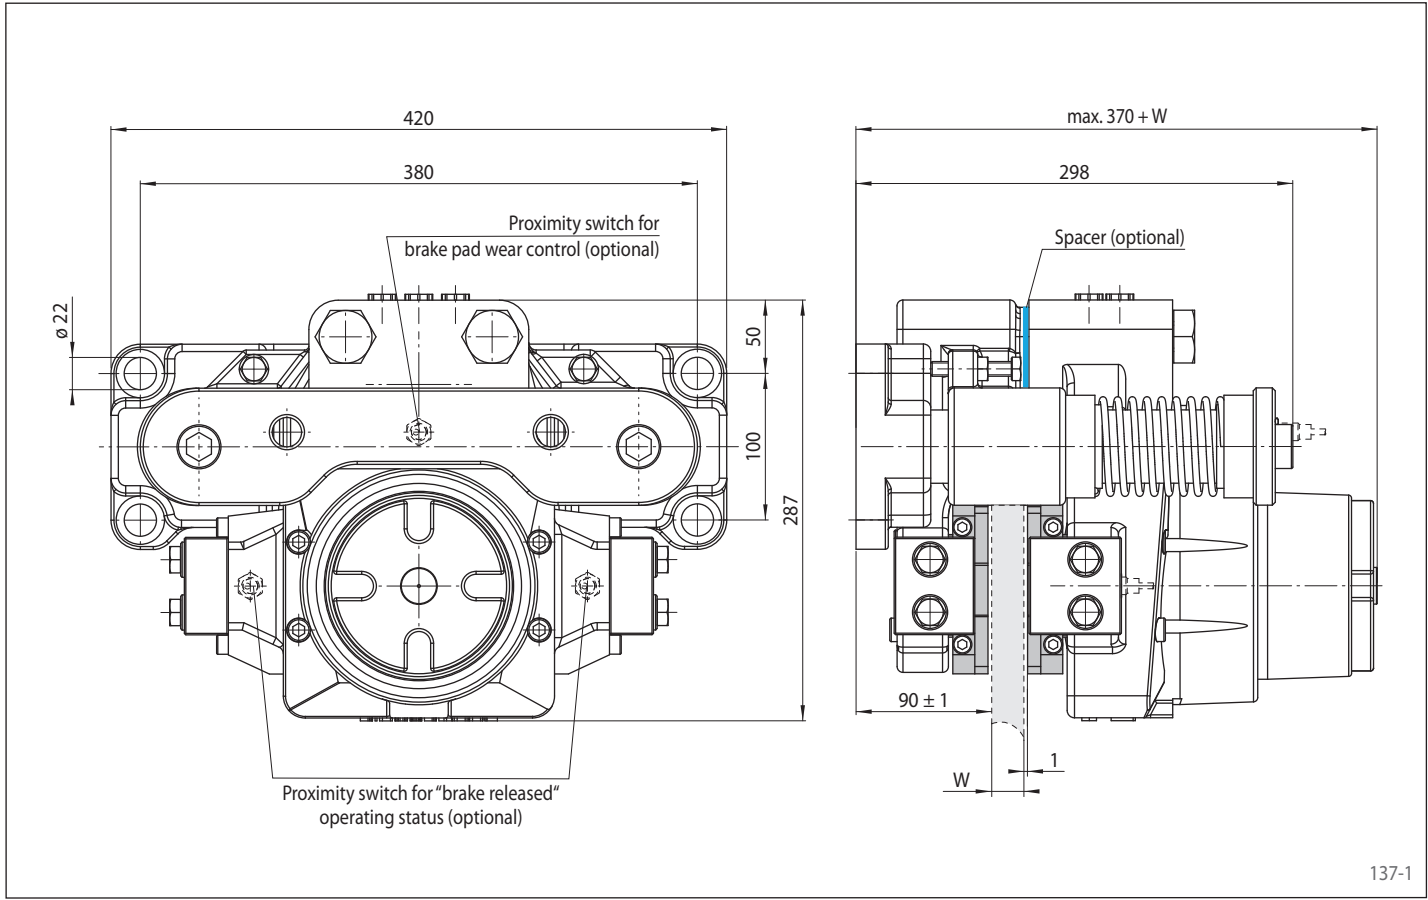

Mounting

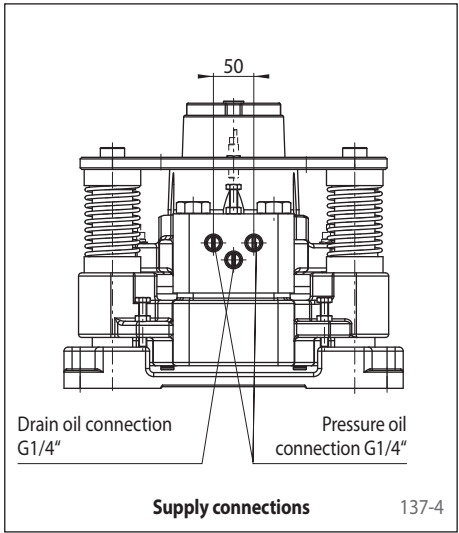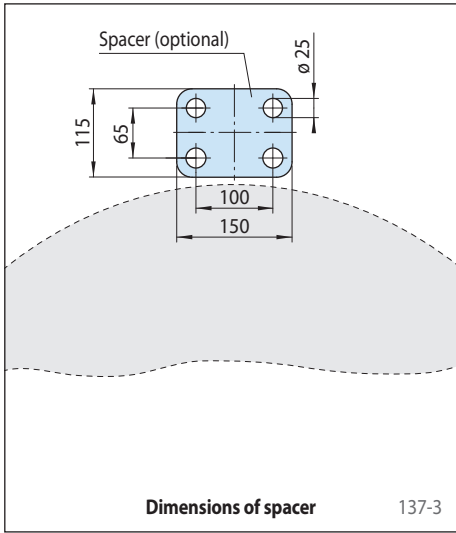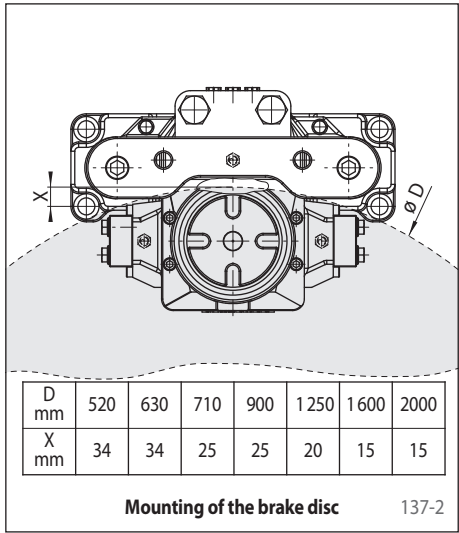

Other features


- High safety against leakage
- Easy change of friction blocks
- Painted with surface coating class C4-L according to ISO 12944
- For brake disc thickness $W = 20$ mm; brake disc thicknesses of up to 40 mm can be achieved with the use of a spacer installed by the customer

Accessories

- Inductive proximity switch for "brake released" operating status
- Inductive proximity switch for brake pad wear control
- Optional painting with surface coating class C4-H or C5M-H (offshore) according to ISO 12944

Brake Caliper HW 075 FHM

spring activated – hydraulically released

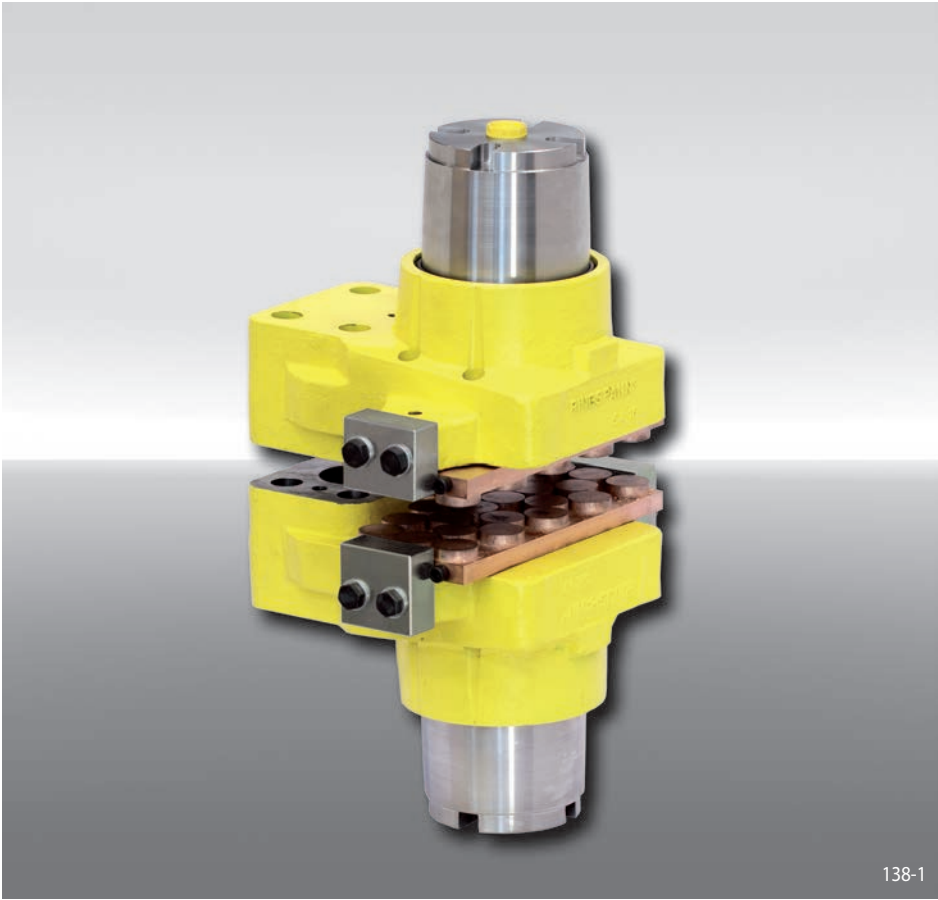

Features	Code
Brake Caliper	H
Standard	W
With piston diameter 75 mm	075
Spring activated	F
Hydraulically released	H
Manual adjustment to accommodate friction block wear	M
Spring packages available for clamping forces of 10 kN, 20 kN, 30 kN, 40 kN or 55 kN	010 to 055
Example for ordering	
Brake Caliper HW 075 FHM, spring package for clamping force 10 kN:	
HW 075 FHM - 010	

Technical Data


	Brake Caliper HW 075 FHM				
	with spring package 010	with spring package 020	with spring package 030	with spring package 040	with spring package 055
Brake disc diameter	Braking torque	Braking torque	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm	Nm	Nm
520	1 500	3 000	4 400	5 900	8 100
630	1 900	3 800	5 700	7 600	10 400
710	2 200	4 400	6 600	8 800	12 100
900	3 000	5 900	8 900	11 900	16 300
1 250	4 400	8 700	13 100	17 500	24 000
1 600	5 800	11 500	17 300	23 100	31 800
2 000	7 400	14 700	22 100	29 500	40 500
Clamping force	10 kN	20 kN	30 kN	40 kN	55 kN
Oil pressure	min. 25 bar max. 140 bar	min. 50 bar max. 140 bar	min. 70 bar max. 140 bar	min. 95 bar max. 140 bar	min. 125 bar max. 140 bar
Oil volume	max. 89 cm ³	max. 89 cm ³	max. 89 cm ³	max. 89 cm ³	max. 89 cm ³
Weight	90 kg	90 kg	90 kg	90 kg	90 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.




Brake Caliper HW 075 FHM

RINGSPANN®

spring activated – hydraulically released

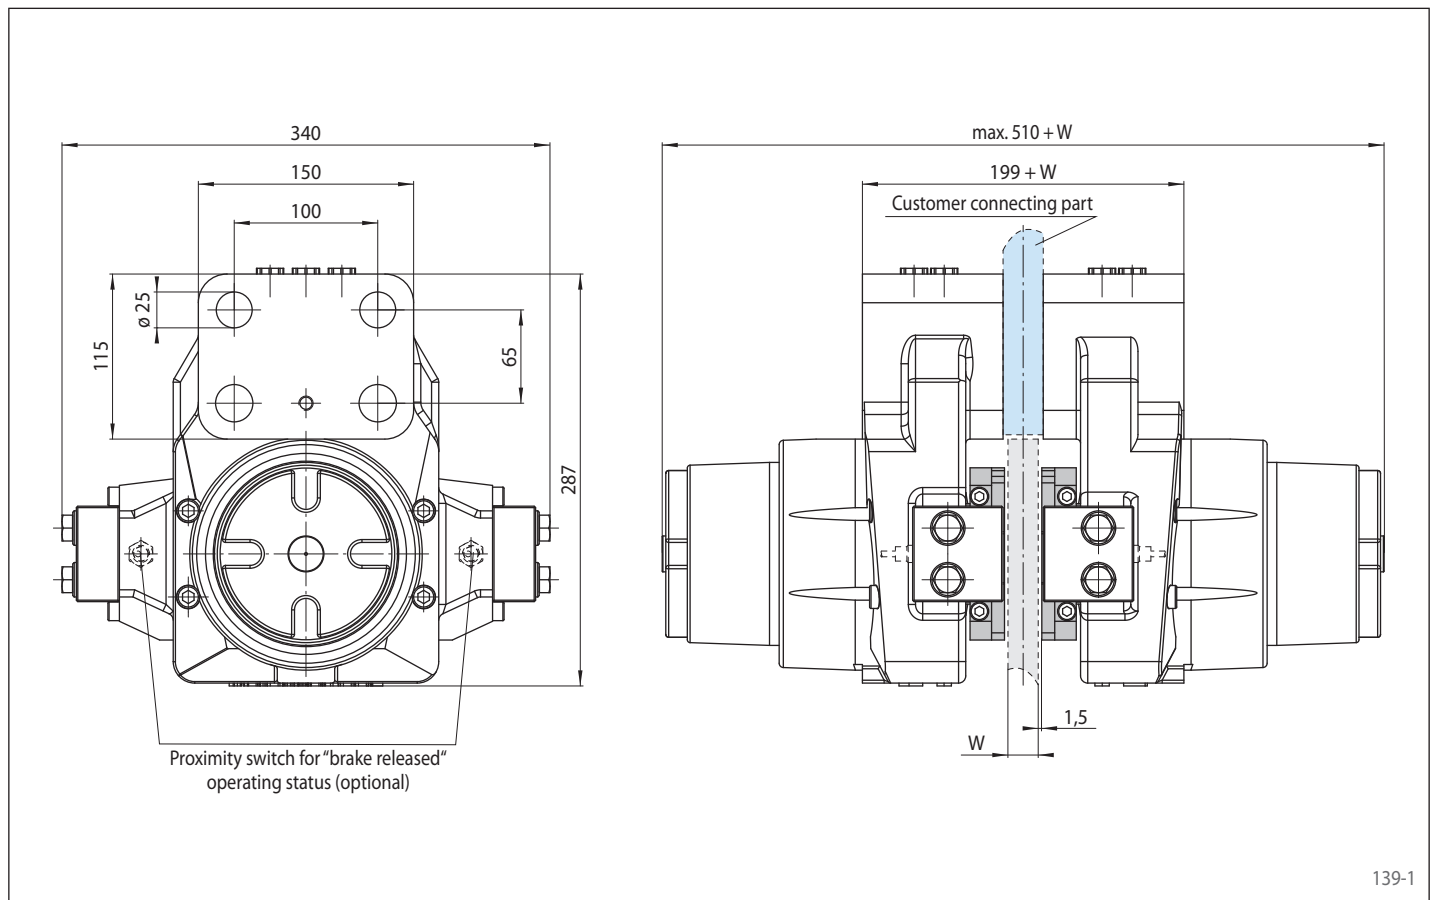

Mounting

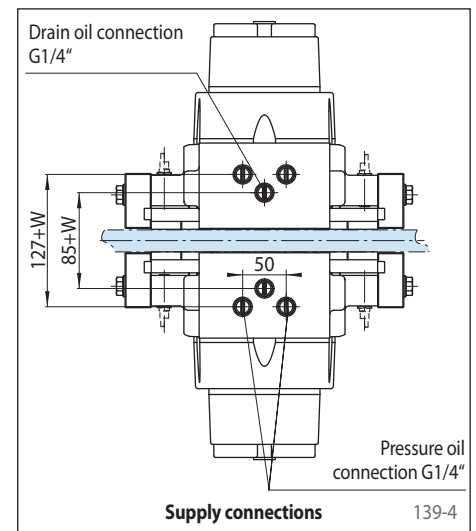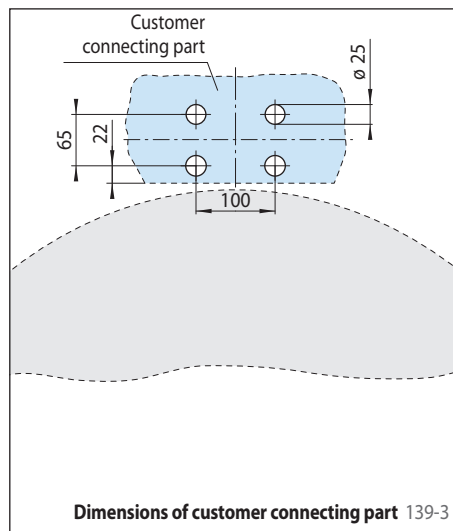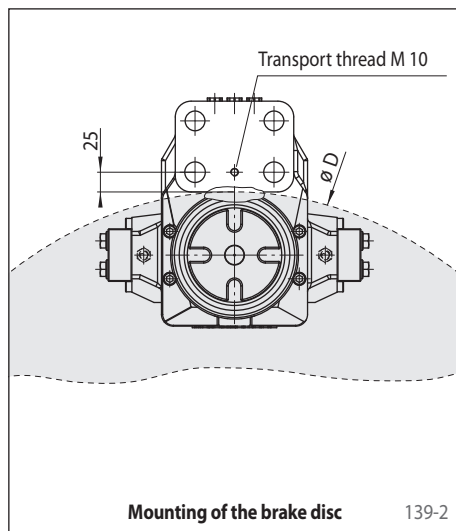

Other features

- High safety against leakage
- Easy change of friction blocks
- Painted with surface coating class C4-L according to ISO 12944
- The thickness of the customer connecting part results from the thickness of the brake disc W plus 3 mm


Accessories

- Inductive proximity switch for "brake released" operating status
- Optional painting with surface coating class C4-H or C5M-H (offshore) according to ISO 12944

Brake Caliper HS 120 FHM

spring activated – hydraulically released
for wind turbines or conveyor systems

RINGSPANN®

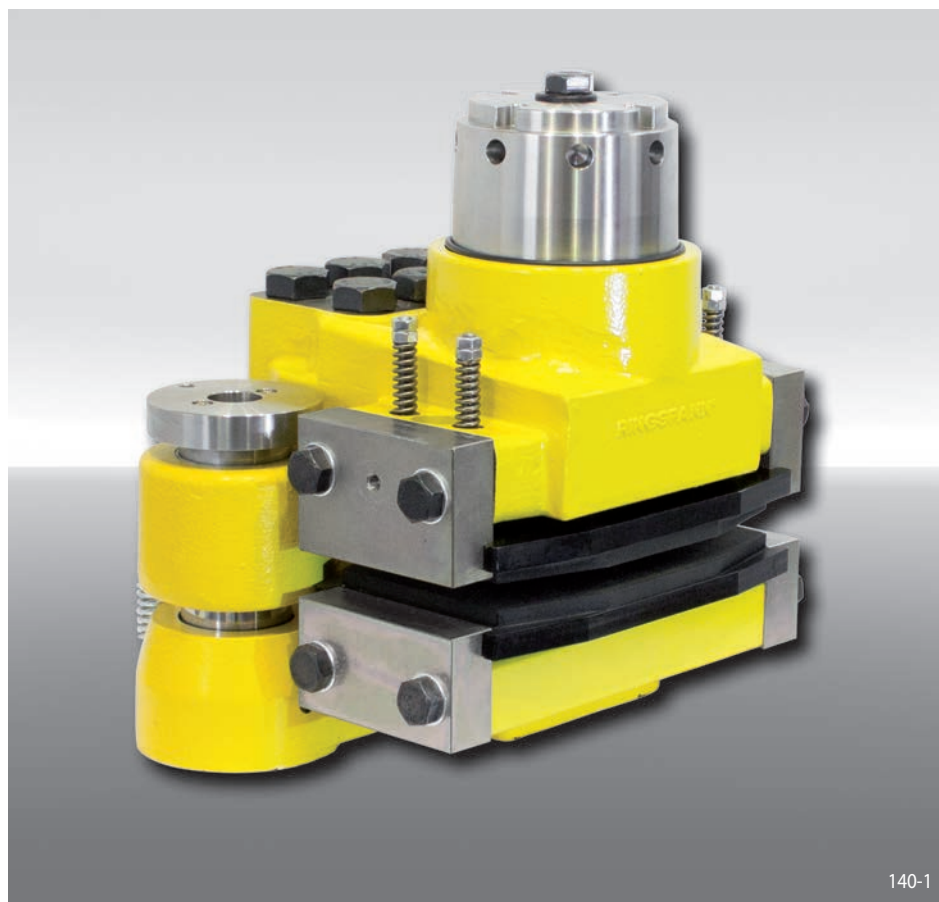

Features

Features	Code
Brake Caliper	H
Floating caliper	S
With piston diameter 120 mm	120
Spring activated	F
Hydraulically released	H
Manual adjustment to accommodate friction block wear	M
Spring packages available for clamping forces of 30 kN, 50 kN, 70 kN, 100 kN or 120 kN	030 to 120

Example for ordering

Brake Caliper HS 120 FHM, spring package for clamping force 30 kN:

HS 120 FHM - 030

Technical Data


	Brake Caliper HS 120 FHM				
	with spring package 030	with spring package 050	with spring package 070	with spring package 100	with spring package 120
Brake disc diameter	Braking torque	Braking torque	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm	Nm	Nm
900	8 400	14 000	19 600	28 000	33 600
1 250	12 600	21 000	29 400	42 000	50 400
1 600	16 800	28 000	39 200	56 000	67 200
2 000	21 600	36 000	50 400	72 000	86 400
3 000	33 600	56 000	91 800	112 000	134 400
3 500	39 600	66 000	108 200	132 000	158 400
4 000	45 600	76 000	124 600	152 000	182 400
Clamping force	30 kN	50 kN	70 kN	100 kN	120 kN
Oil pressure	min. 50 bar max. 200 bar	min. 80 bar max. 200 bar	min. 110 bar max. 200 bar	min. 140 bar max. 200 bar	min. 180 bar max. 200 bar
Oil volume	max. 160 cm ³	max. 160 cm ³	max. 160 cm ³	max. 160 cm ³	max. 160 cm ³
Weight	ca. 200 kg	ca. 200 kg	ca. 200 kg	ca. 200 kg	ca. 200 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Brake Caliper HS 120 FHM




RINGSPANN®

spring activated – hydraulically released
for wind turbines or conveyor systems

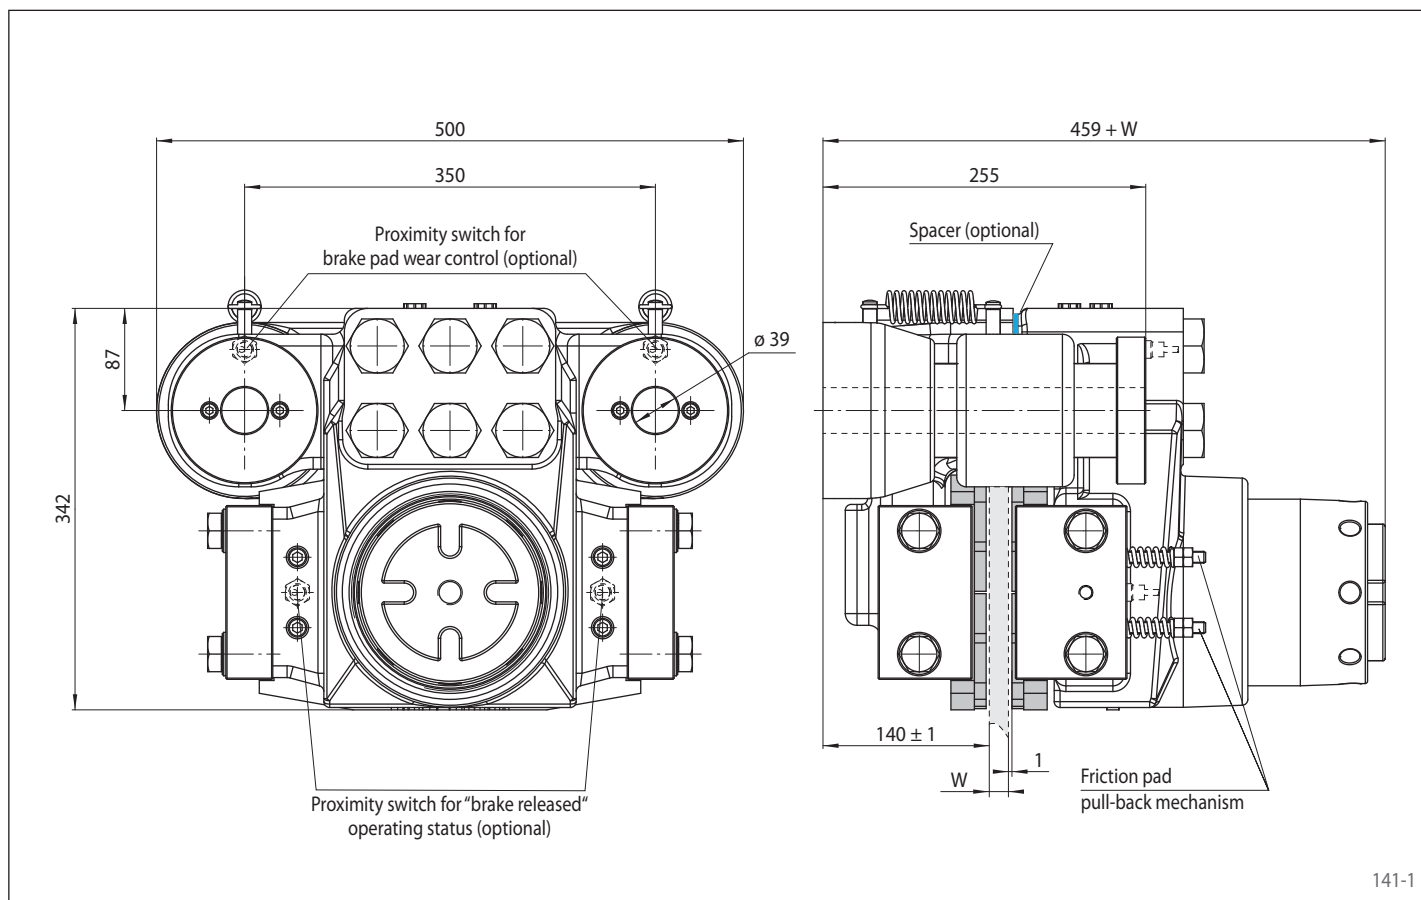

141-1

Mounting

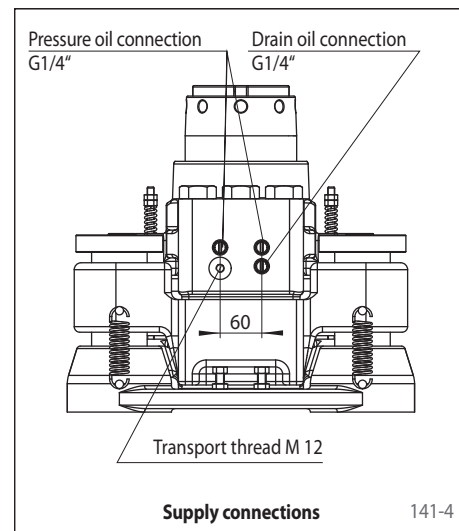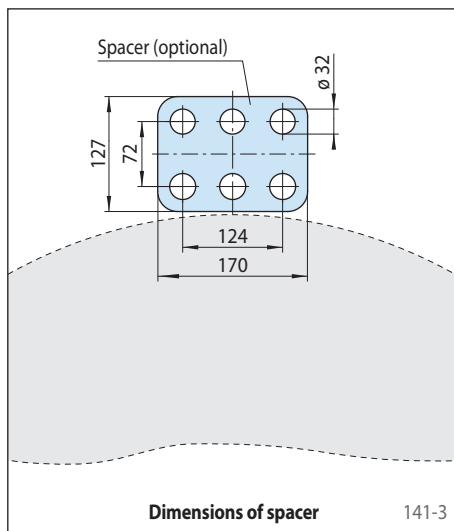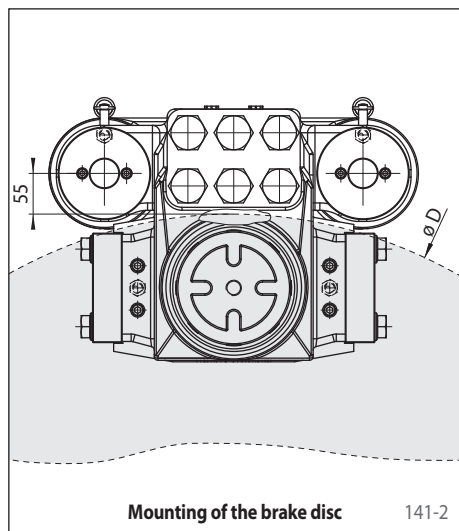

Other features

- High safety against leakage
- Easy change of friction blocks
- Painted with surface coating class C4-L according to ISO 12944
- For brake disc thickness $W = 20$ mm; brake disc thicknesses of up to 40 mm can be achieved with the use of a spacer installed by the customer


Accessories

- Inductive proximity switch for "brake released" operating status
- Inductive proximity switch for brake pad wear control
- Optional painting with surface coating class C4-H or C5M-H (offshore) according to ISO 12944

Brake Caliper HW 120 FHM

spring activated – hydraulically released

RINGSPANN®

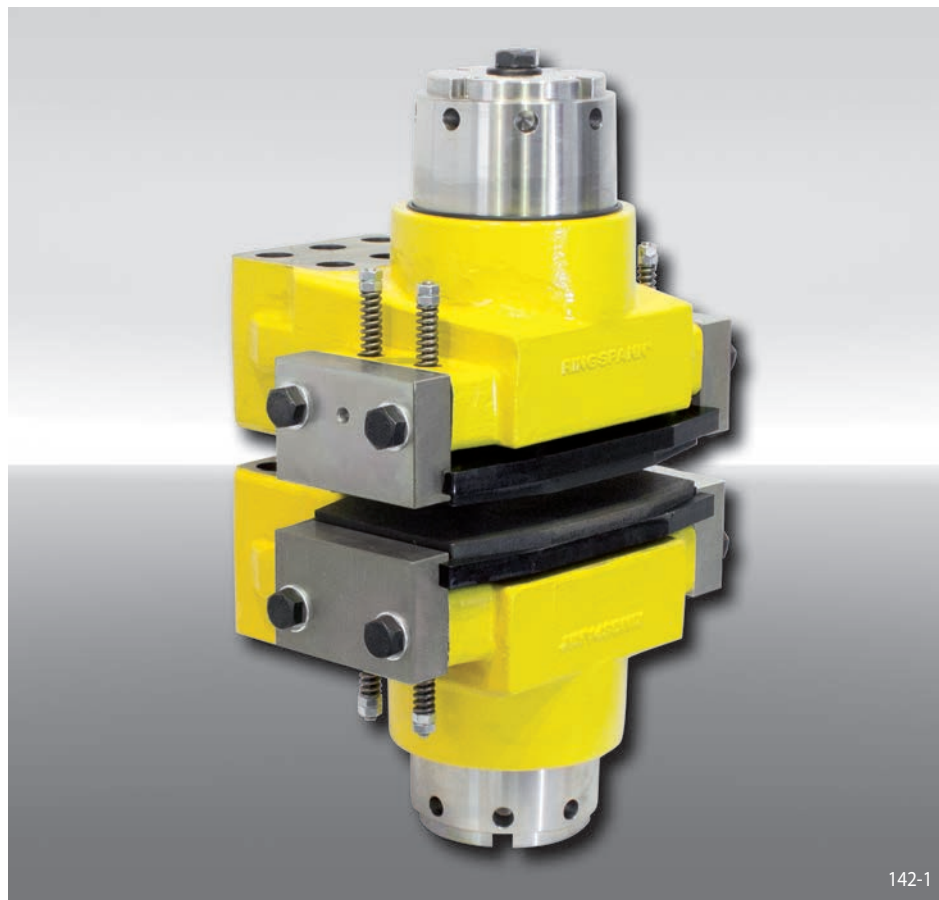

Features

Features	Code
Brake Caliper	H
Standard	W
With piston diameter 120 mm	120
Spring activated	F
Hydraulically released	H
Manual adjustment to accommodate friction block wear	M
Spring packages available for clamping forces of 30 kN, 50 kN, 70 kN, 100 kN or 120 kN	030 to 120

Example for ordering

Brake Caliper HW 120 FHM, spring package for clamping force 30 kN:

HW 120 FHM - 030

Technical Data


	Brake Caliper HW 120 FHM				
	with spring package 030	with spring package 050	with spring package 070	with spring package 100	with spring package 120
Brake disc diameter	Braking torque	Braking torque	Braking torque	Braking torque	Braking torque
mm	Nm	Nm	Nm	Nm	Nm
900	8 400	14 000	19 600	28 000	33 600
1 250	12 600	21 000	29 400	42 000	50 400
1 600	16 800	28 000	39 200	56 000	67 200
2 000	21 600	36 000	50 400	72 000	86 400
3 000	33 600	56 000	91 800	112 000	134 400
3 500	39 600	66 000	108 200	132 000	158 400
4 000	45 600	76 000	124 600	152 000	182 400
Clamping force	30 kN	50 kN	70 kN	100 kN	120 kN
Oil pressure	min. 50 bar max. 200 bar	min. 80 bar max. 200 bar	min. 110 bar max. 200 bar	min. 140 bar max. 200 bar	min. 180 bar max. 200 bar
Oil volume	max. 170 cm ³	max. 170 cm ³	max. 170 cm ³	max. 170 cm ³	max. 170 cm ³
Weight	ca. 185 kg	ca. 185 kg	ca. 185 kg	ca. 185 kg	ca. 185 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.




Brake Caliper HW 120 FHM

RINGSPANN®

spring activated – hydraulically released

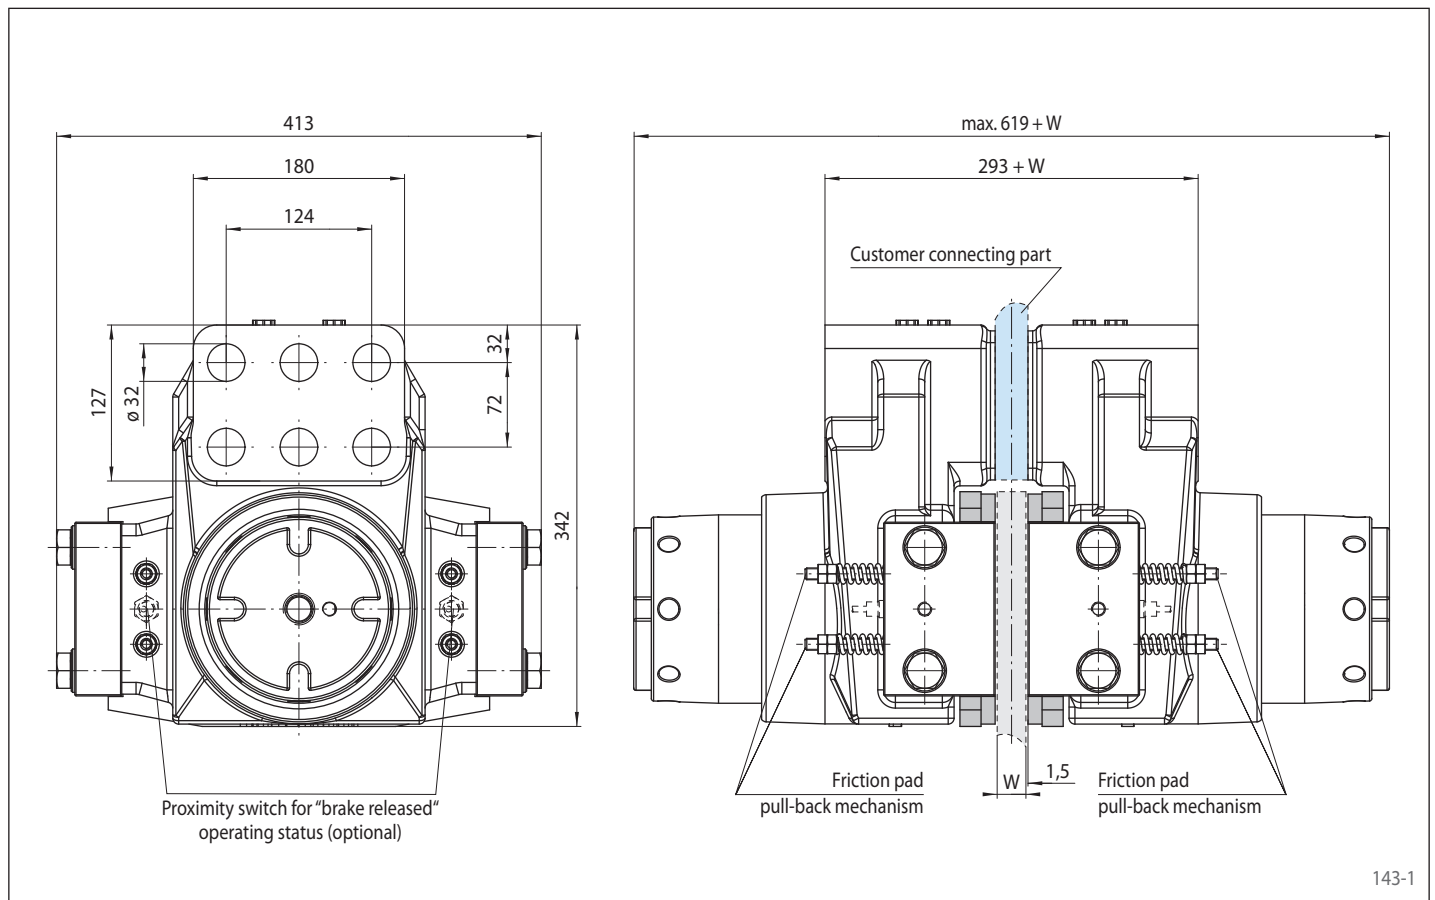

Mounting

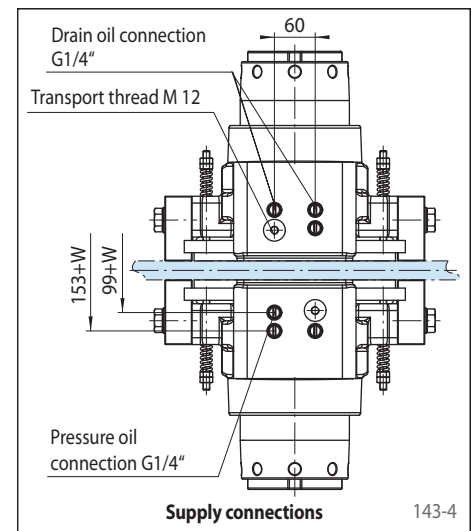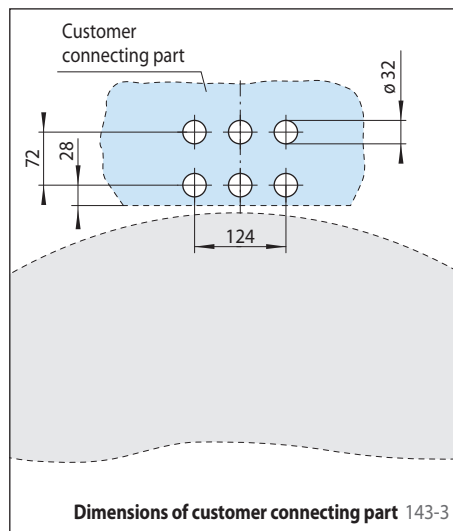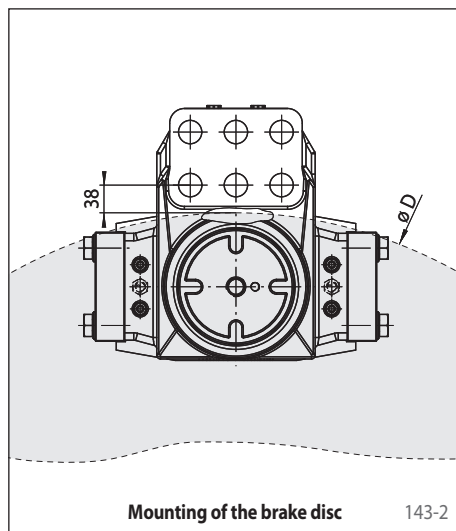

Other features

- High safety against leakage
- Easy change of friction blocks
- Painted with surface coating class C4-L according to ISO 12944
- The thickness of the customer connecting part results from the thickness of the brake disc W plus 3 mm

Accessories

- Inductive proximity switch for "brake released" operating status
- Optional painting with surface coating class C4-H or C5M-H (offshore) according to ISO 12944

Brake Caliper HS 145 FHM-270 R-V

spring activated – hydraulically released

RINGSPANN®



144-1

Features	Code
Brake Caliper	H
Floating caliper	S
Frame size 145	145
Spring activated	F
Hydraulically released	H
Manual adjustment to accommodate friction block wear	M
Max. clamping force 270 kN	270
Thruster mounted right available	R
Mounting to the machine parallel to the brake disc	V

Example for ordering

Brake Caliper HS 145 FHM, max. clamping force 270 kN, thruster mounted right, mounting to the machine parallel to the brake disc:

HS 145 FHM-270 R-V

Technical Data

Brake disc diameter	Braking torque
mm	Nm
700	54 900
800	65 400
1 000	86 600
1 250	112 900
1 600	149 900
2 000	192 100
3 000	297 700
3 500	350 400
4 000	403 200
Clamping force	270 kN
Oil pressure	min. 230 bar max. 250 bar
Oil volume	max. 40 cm ³
Thickness of brake disc W	30 mm
Weight	330 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Working conditions

- Ambient temperature: -20 °C / +60 °C
- Air humidity: <90%

Monitoring switch

- 240 VAC 1.5 A; 250 VDC 0.1 A
- Cable 5 x 0.75 mm², length 2 m, outer diameter 7.5 mm
- Protection type IP67

Options

- Hydraulic Power Unit
- Friction pads with wear indicator cables or sintered friction linings (for high temperatures)
- Corrosion-protected version
- Low temperature version
- Offshore certifications
- ATEX certifications for hazardous areas


Notes

- Eyebolts included
- **Fastening:**
8 screws M 24, class 8.8 with tightening torque 630 Nm ±10% μ 0.15 (not supplied)



Brake Caliper HS 145 FHM-270 R-V

RINGSPANN®

spring activated – hydraulically released

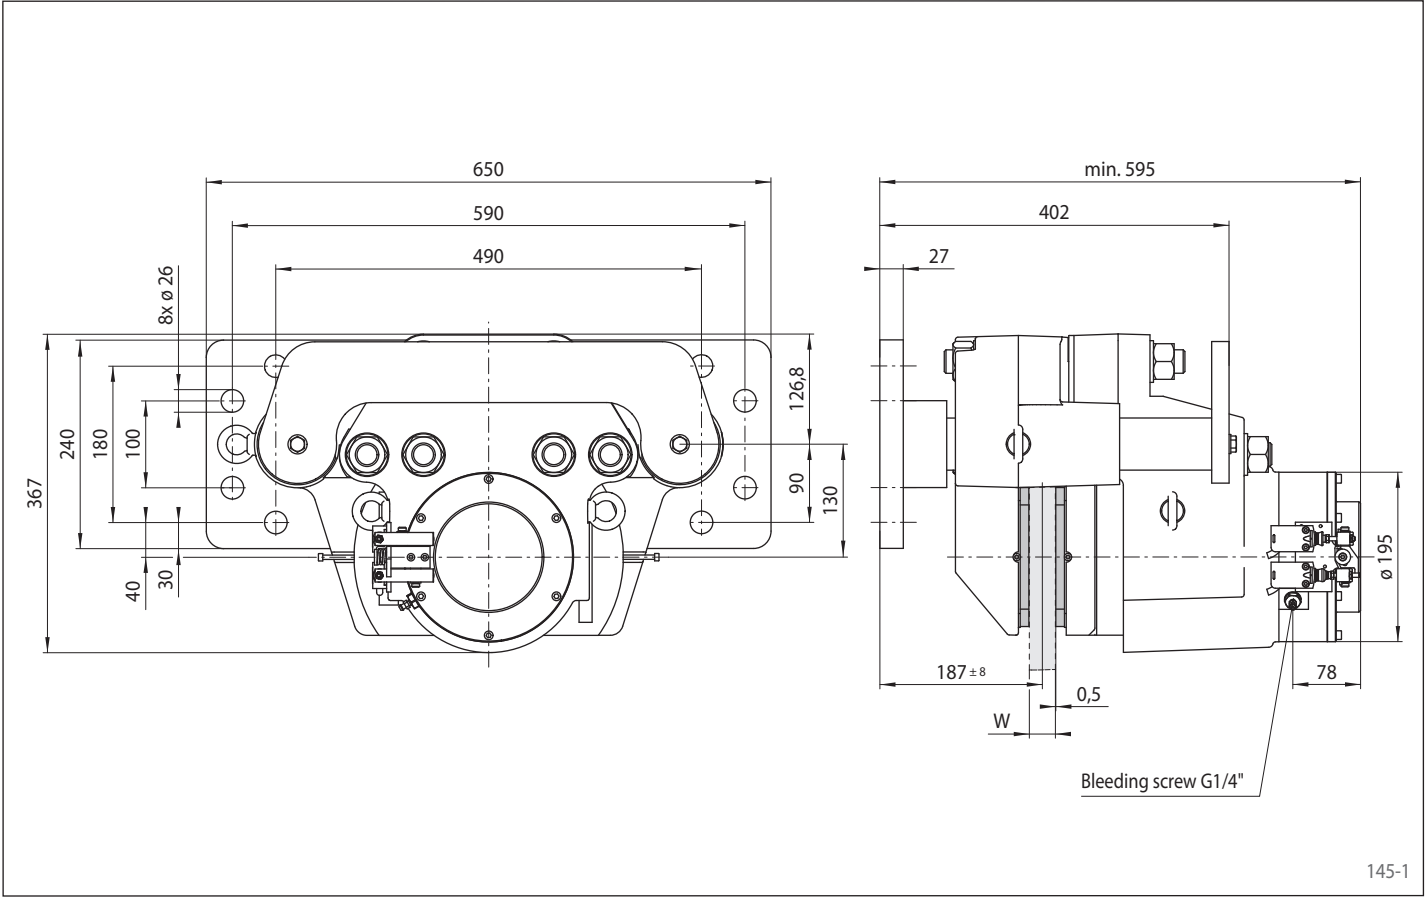


Mounting

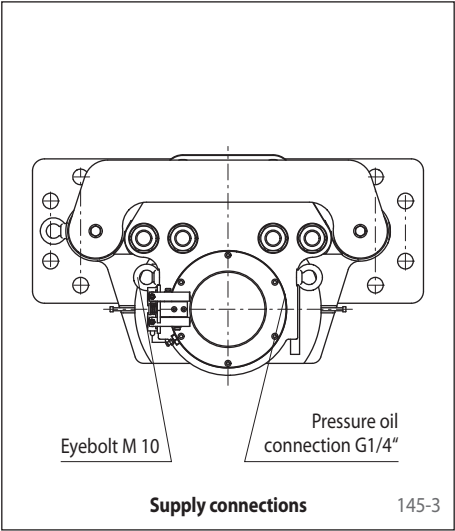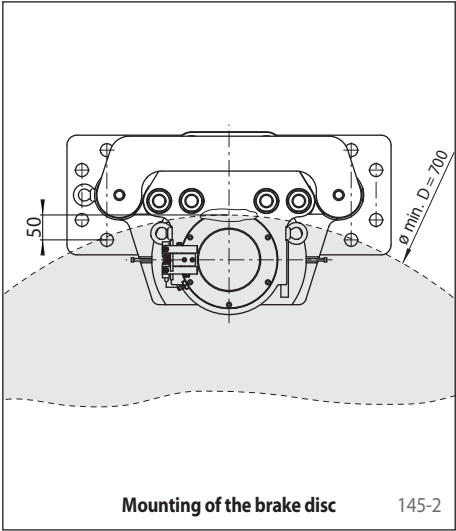

Brake Caliper HS 145 FHM-270 ... -H

spring activated – hydraulically released

RINGSPANN®

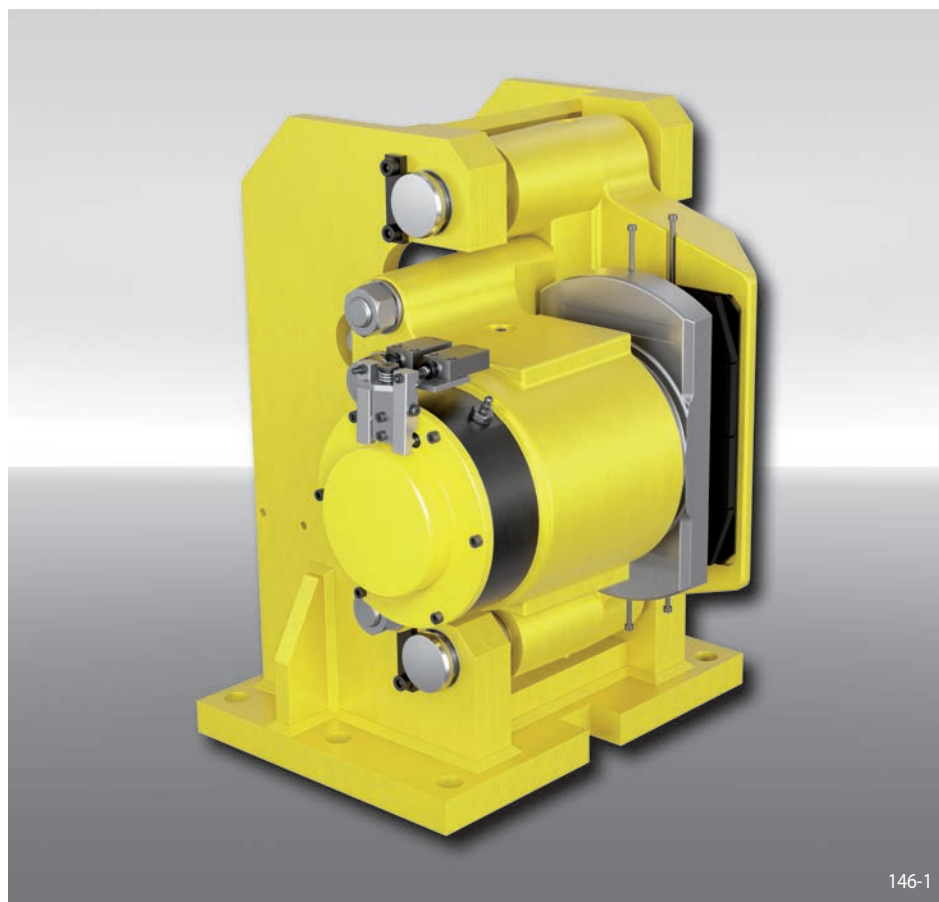

Features	Code
Brake Caliper	H
Floating caliper	S
Frame size 145	145
Spring activated	F
Hydraulically released	H
Manual adjustment to accommodate friction block wear	M
Max. clamping force 270 kN	270
Thruster mounted right or left available	R L
Mounting to the machine at right angles to the brake disc	H

Example for ordering

Brake Caliper HS 145 FHM, max. clamping force 270 kN, thruster mounted left, mounting to the machine at right angles to the brake disc

HS 145 FHM-270 L-H

Technical Data

Brake disc diameter	Braking torque
mm	Nm
700	54 900
800	65 400
1 000	86 600
1 250	112 900
1 600	149 900
2 000	192 100
3 000	297 700
3 500	350 400
4 000	403 200
Clamping force	270 kN
Oil pressure	min. 230 bar max. 250 bar
Oil volume	max. 40 cm ³
Thickness of brake disc W	30 mm
Weight	330 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Working conditions

- Ambient temperature: -20 °C / +60 °C
- Air humidity: <90%

Monitoring switch

- 240 VAC 1.5 A; 250 VDC 0.1 A
- Cable 5 x 0.75 mm², length 2 m, outer diameter 7.5 mm
- Protection type IP67

Optionen

- Integrated Hydraulic Power Unit
- Friction pads with wear indicator cables or sintered friction linings (for high temperatures)
- Corrosion-protected version
- Low temperature version
- Offshore certifications
- ATEX certifications for hazardous areas


Notes

- Eyebolts included
- **Fastening:**
6 screws M 24, class 8.8 with tightening torque 630 Nm ±10% μ 0.15 (not supplied)



Brake Caliper HS 145 FHM-270 ... -H

RINGSPANN®

spring activated – hydraulically released

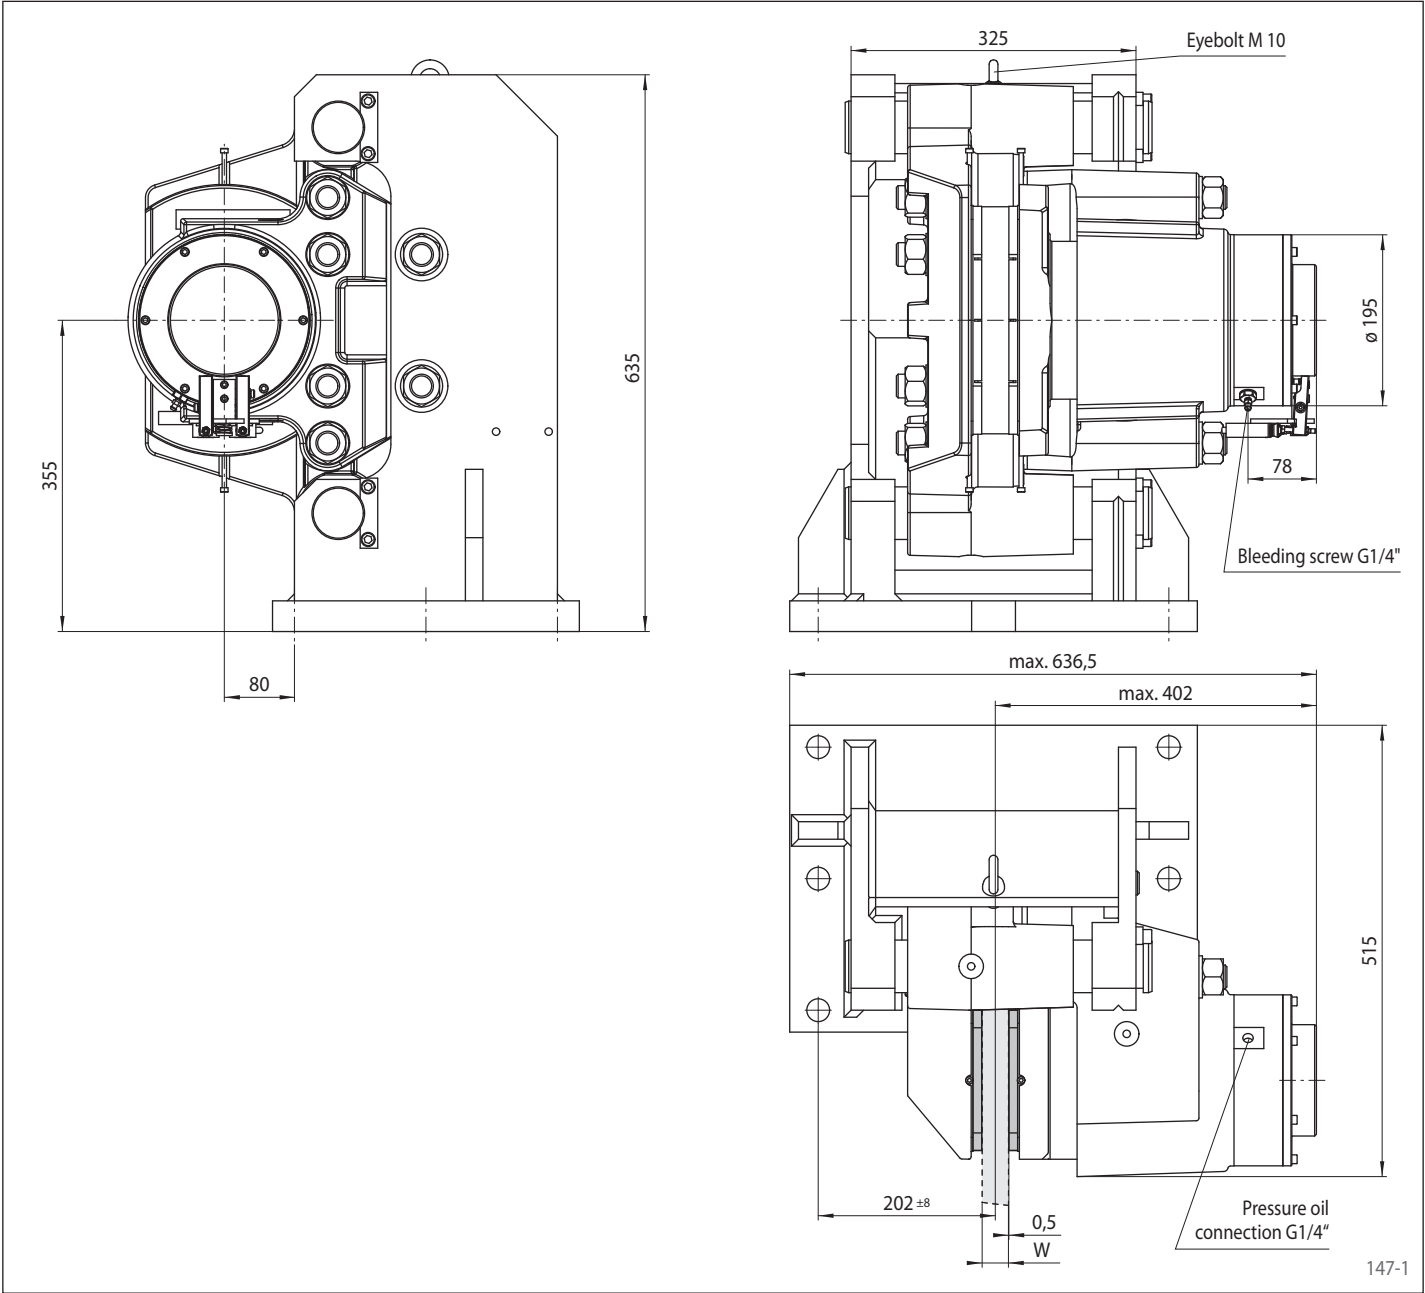

Mounting

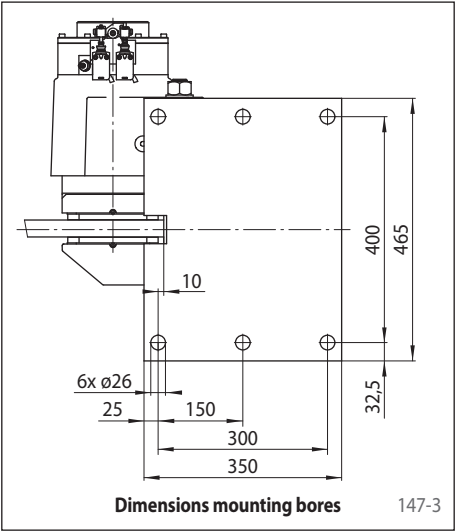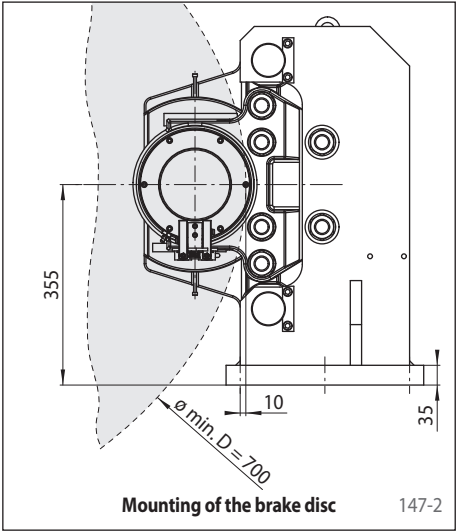

Brake Caliper HW 145 FHM

spring activated – hydraulically released

RINGSPANN®



Features

Features	Code
Brake Caliper	H
Standard	W
Frame size 145	145
Spring activated	F
Hydraulically released	H
Manual adjustment to accommodate friction block wear	M
Max. clamping force 270 kN	270

Example for ordering

Brake Caliper HW 145 FHM,
max. clamping force 270 kN:

HW 145 FHM-270

Technical Data

Brake disc diameter	Braking torque
mm	Nm
700	54 900
800	65 400
1 000	86 600
1 250	112 900
1 600	149 900
2 000	192 100
3 000	297 700
3 500	350 400
4 000	403 200
Clamping force	270 kN
Oil pressure	min. 230 bar max. 250 bar
Oil volume	max. 70 cm ³
Thickness of brake disc W	min. 25 mm
Weight	237 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Working conditions

- Ambient temperature: -20 °C / +60 °C
- Air humidity: <90%

Monitoring switch

- 240 VAC 1.5 A; 250 VDC 0.1 A
- Cable 5 x 0.75 mm², length 2 m, outer diameter 7.5 mm
- Protection type IP67

Options


- Friction pads with wear indicator cables or sintered friction linings (for high temperatures)
- Corrosion-protected version
- Low temperature version
- Offshore certifications
- ATEX certifications for hazardous areas

Notes




- Includes two pairs of ø 32_{g6} shear pins
- Eyebolts included
- **Fastening:**
6 screws M 27, class 10.9 with tightening torque 1 380 Nm ±10% μ 0.15 (not supplied)

Brake Caliper HW 145 FHM

spring activated – hydraulically released

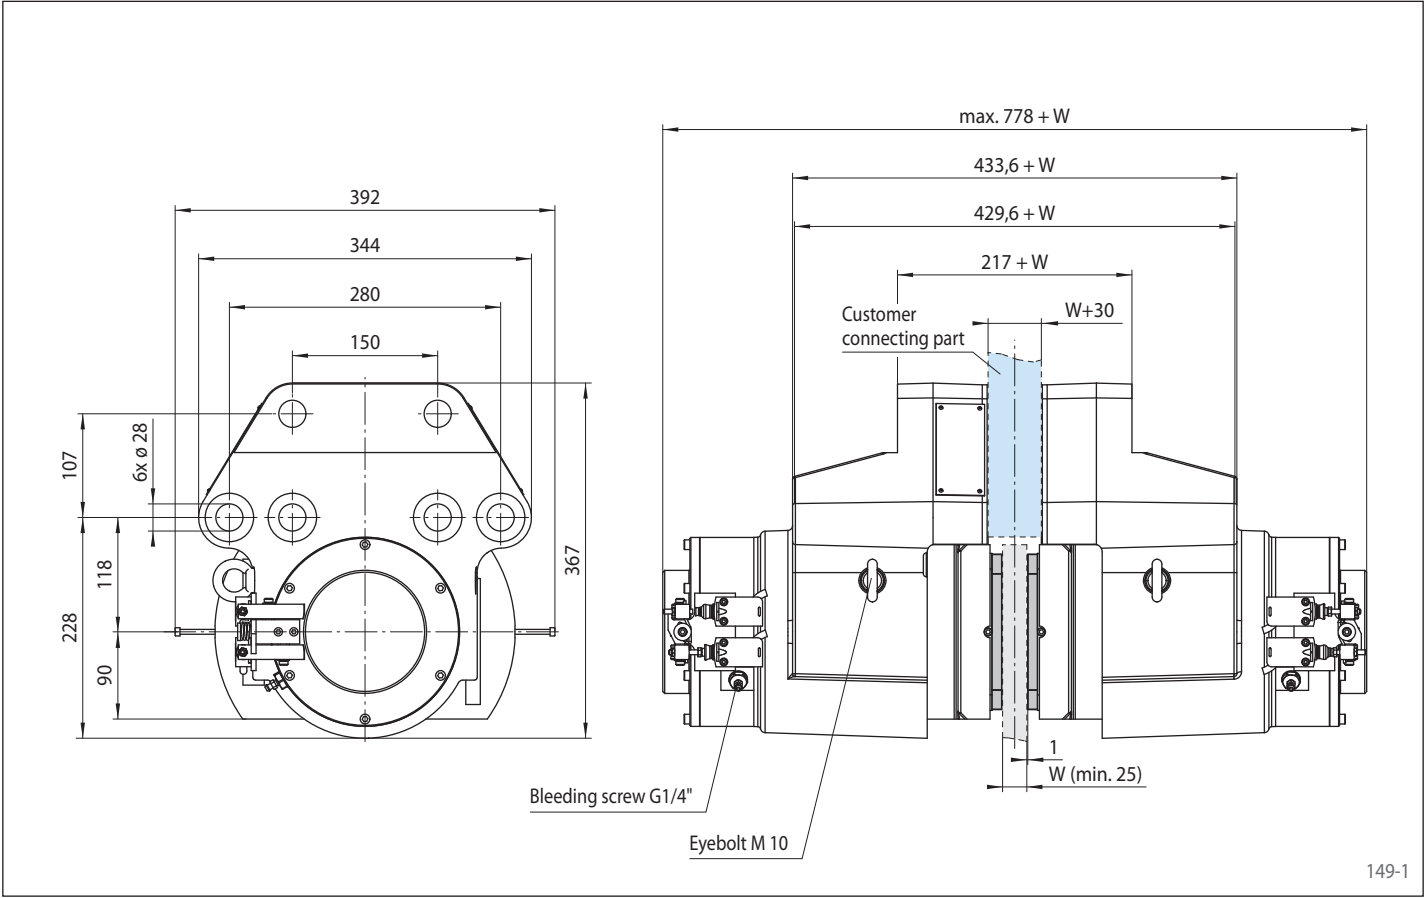


Mounting

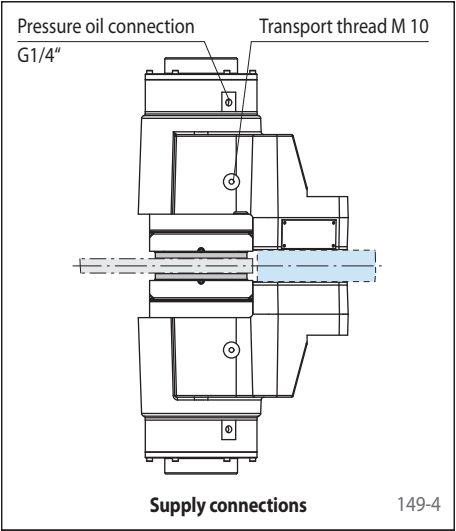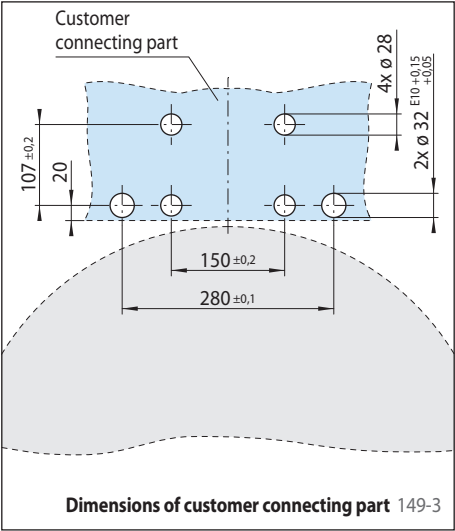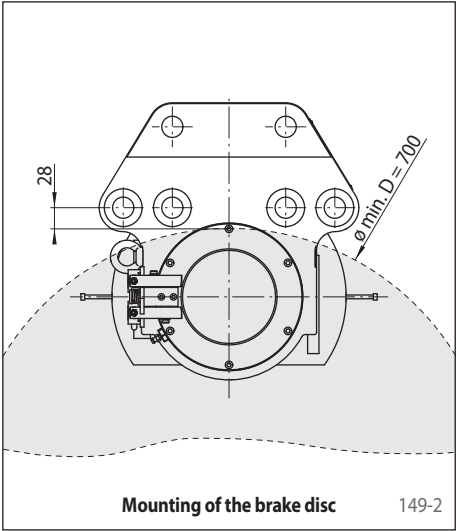

Brake Caliper HS 165 FHM-420 R-V

spring activated – hydraulically released

RINGSPANN®

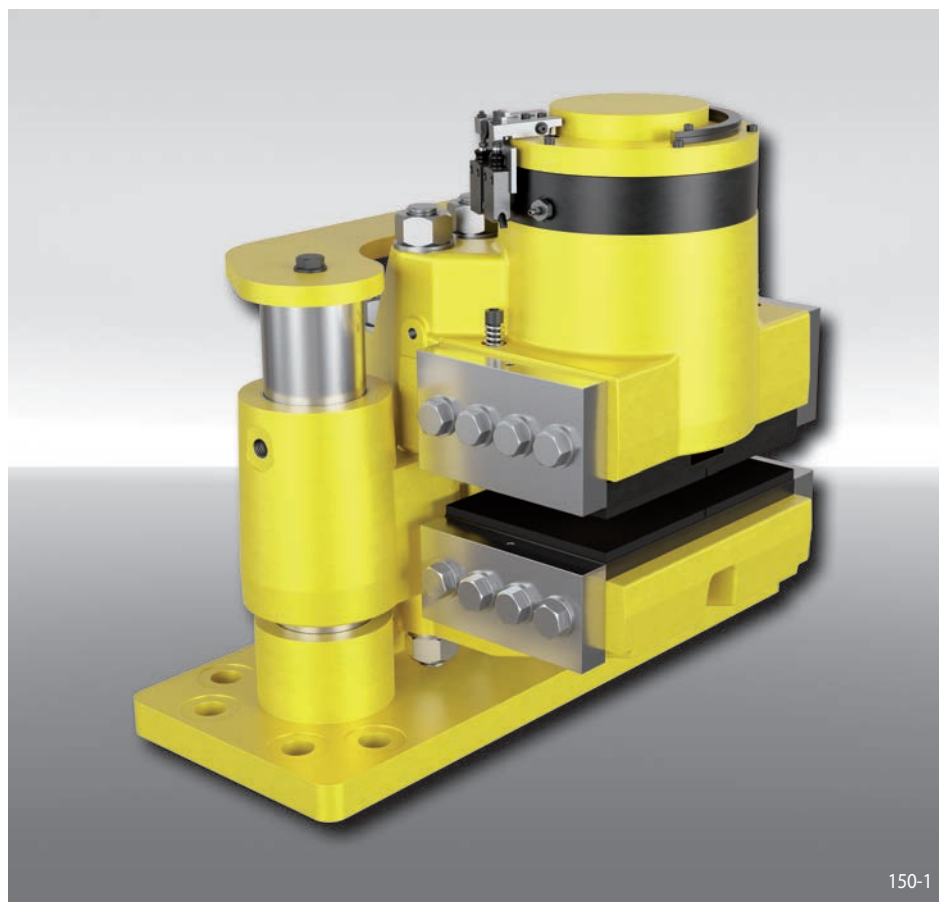

Features	Code
Brake Caliper	H
Floating caliper	S
Frame size 165	165
Spring activated	F
Hydraulically released	H
Manual adjustment to accommodate friction block wear	M
Max. clamping force 420 kN	420
Thruster mounted right available	R
Mounting to the machine parallel to the brake disc	V

Example for ordering

Brake Caliper HS 165 FHM, max. clamping force 420 kN, thruster mounted right, mounting to the machine parallel to the brake disc:

HS 165 FHM-420 R-V

Technical Data

Brake disc diameter	Braking torque
mm	Nm
800	97 700
1 000	131 000
1 250	172 700
1 600	231 000
2 000	297 700
3 000	464 300
3 500	547 700
4 000	631 000
Clamping force	420 kN
Oil pressure	min. 230 bar max. 250 bar
Oil volume	max. 70 cm ³
Thickness of brake disc W	30 mm
Weight	528 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Working conditions

- Ambient temperature: -20 °C / +60 °C
- Air humidity: <90%

Monitoring switch

- 240 VAC 1.5 A; 250 VDC 0.1 A
- Cable 5 x 0.75 mm², length 2 m, outer diameter 7.5 mm
- Protection type IP67

Optionen

- Hydraulic Power Unit
- Friction pads with wear indicator cables or sintered friction linings (for high temperatures)
- Corrosion-protected version
- Low temperature version
- Offshore certifications
- ATEX certifications for hazardous areas


Notes

- Eyebolts included
- **Fastening:**
8 screws M 30, class 8.8 with tightening torque 1 200 Nm ±10% μ 0.15 (not supplied)



Brake Caliper HS 165 FHM-420 R-V

RINGSPANN®

spring activated – hydraulically released

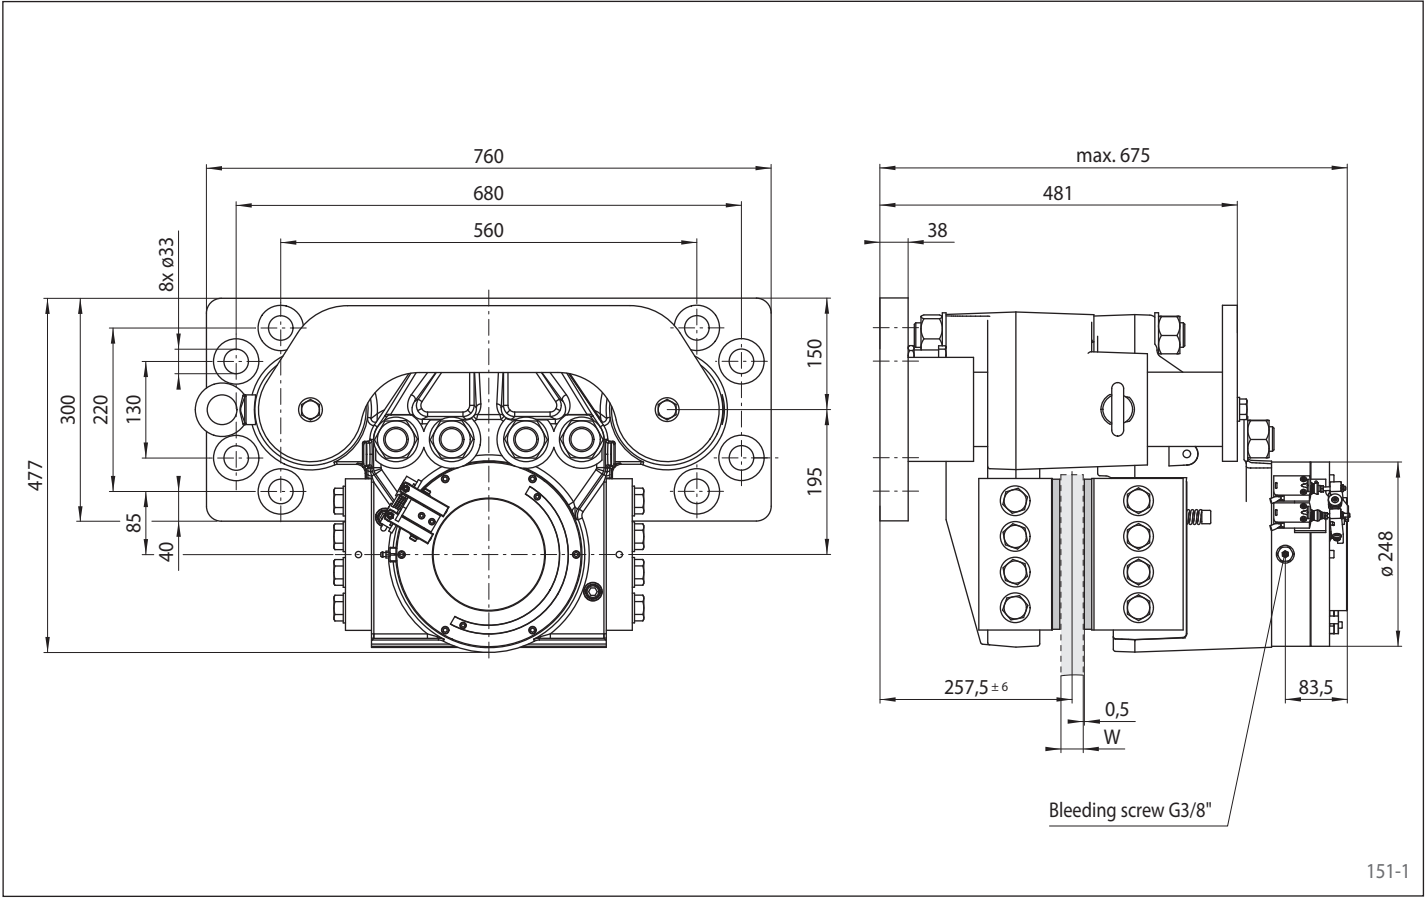

Mounting

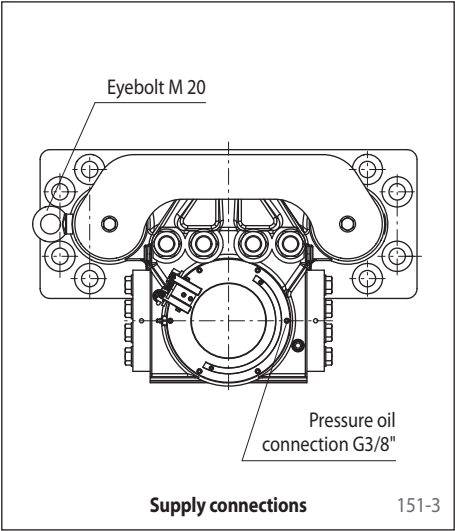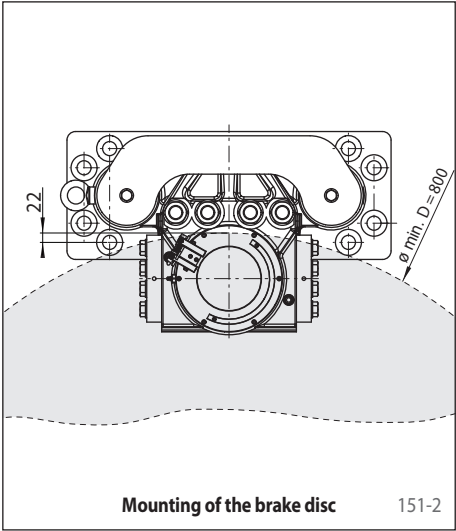

Brake Caliper HS 165 FHM-420 ... -H

spring activated – hydraulically released

RINGSPANN®



152-1

Features

Features	Code
Brake Caliper	H
Floating caliper	S
Frame size 165	165
Spring activated	F
Hydraulically released	H
Manual adjustment to accommodate friction block wear	M
Max. clamping force 420 kN	420
Thruster mounted right or left available	R L
Mounting to the machine at right angles to the brake disc	H

Example for ordering

Brake Caliper HS 165 FHM, max. clamping force 420 kN, thruster mounted left, mounting to the machine at right angles to the brake disc

HS 165 FHM-420 L-H

Technical Data

Brake disc diameter	Braking torque
mm	Nm
800	97 700
1 000	131 000
1 250	172 700
1 600	231 000
2 000	297 700
3 000	464 300
3 500	547 700
4 000	631 000
Clamping force	420 kN
Oil pressure	min. 230 bar max. 250 bar
Oil volume	max. 70 cm ³
Thickness of brake disc W	30 mm
Weight	625 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Working conditions

- Ambient temperature: -20 °C / +60 °C
- Air humidity: <90%

Monitoring switch

- 240 VAC 1.5 A; 250 VDC 0.1 A
- Cable 5 x 0.75 mm², length 2 m, outer diameter 7.5 mm
- Protection type IP67

Optionen

- Integrated Hydraulic Power Unit
- Friction pads with wear indicator cables or sintered friction linings (for high temperatures)
- Corrosion-protected version
- Low temperature version
- Offshore certifications
- ATEX certifications for hazardous areas


Notes

- Eyebolts included
- **Fastening:**
6 screws M 30, class 8.8 with tightening torque 1 200 Nm ±10% μ 0.15 (not supplied)



Brake Caliper HS 165 FHM-420 ... -H

RINGSPANN®

spring activated – hydraulically released

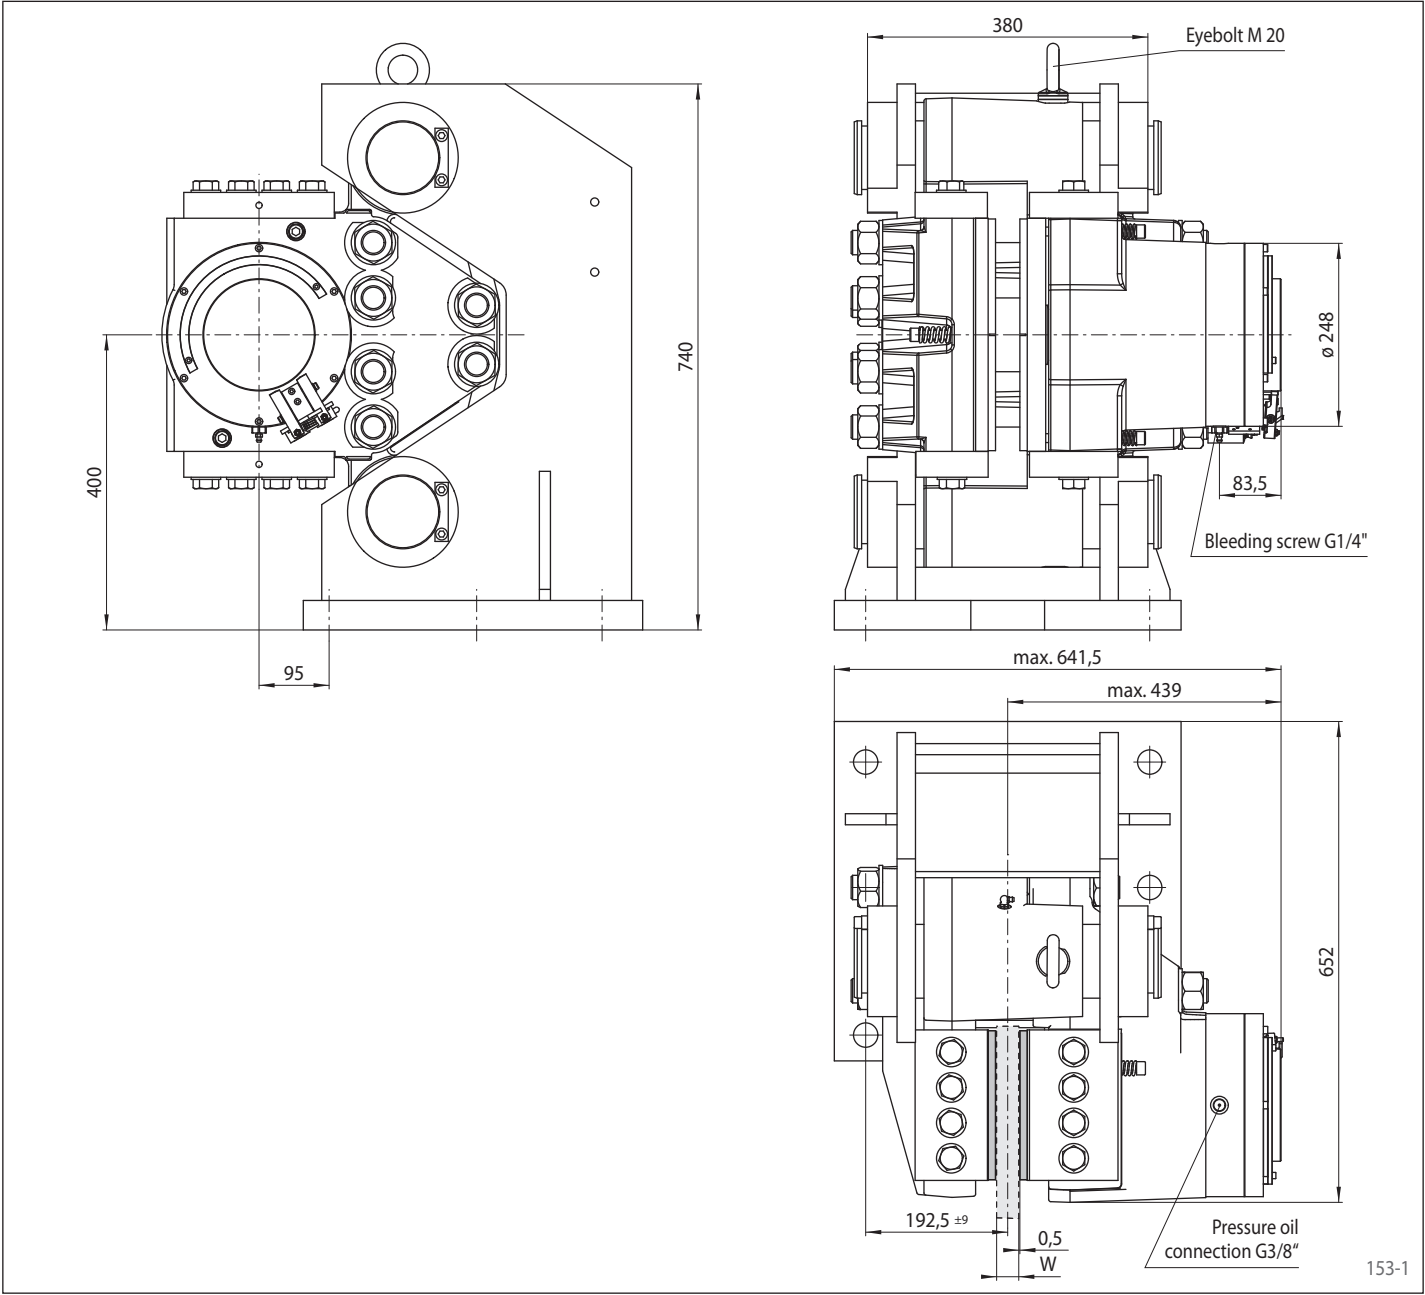


Mounting

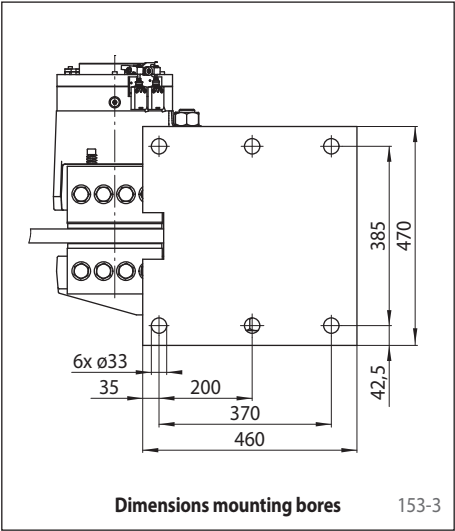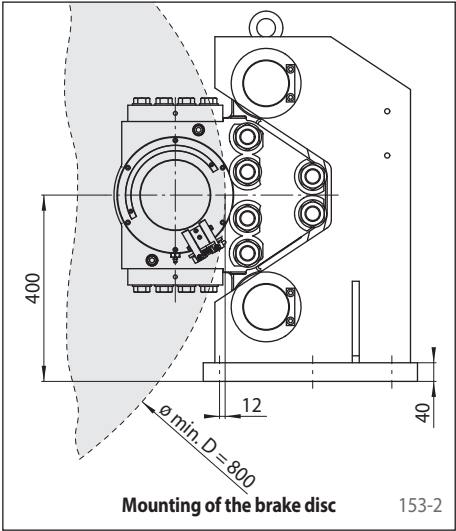

Brake Caliper HW 165 FHM

spring activated – hydraulically released

RINGSPANN®

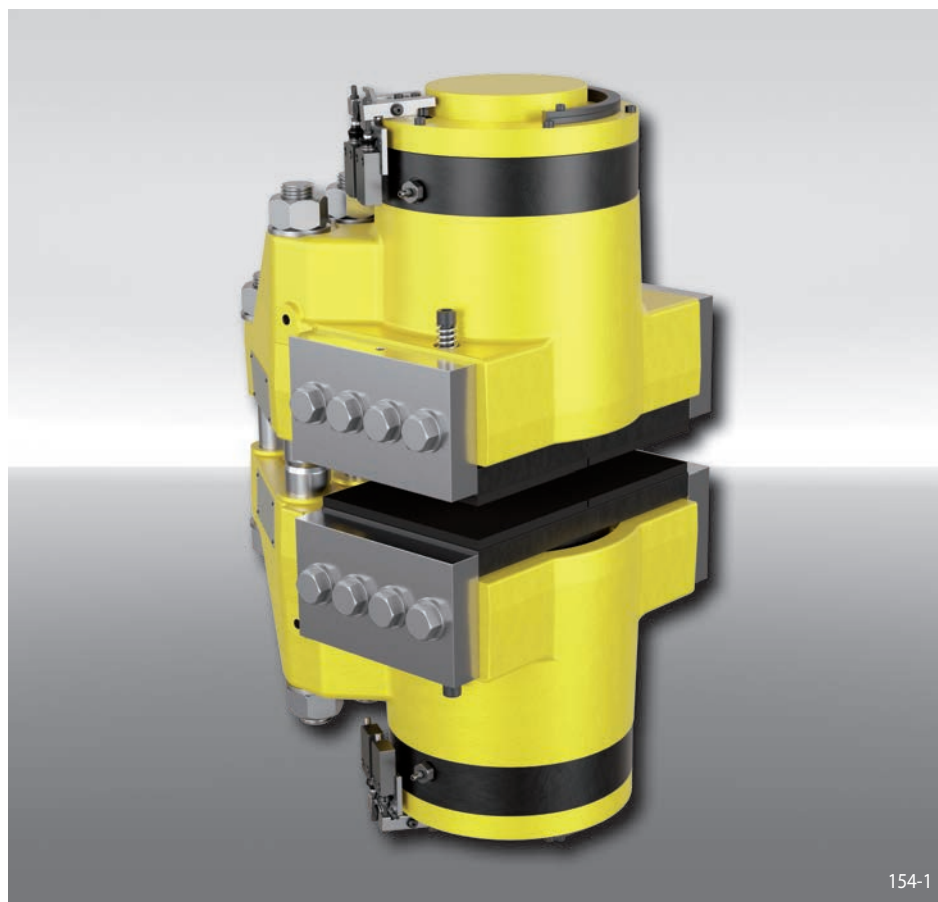

Features

Brake Caliper

Code

H

Standard

W

Frame size 165

165

Spring activated

F

Hydraulically released

H

Manual adjustment to
accommodate friction block wear

M

Max. clamping force 420 kN

420

Example for ordering

Brake Caliper HW 165 FHM,
max. clamping force 420 kN:

HW 165 FHM-420

Technical Data

Brake disc diameter	Braking torque
mm	Nm
800	97 700
1 000	131 000
1 250	172 700
1 600	231 000
2 000	297 700
3 000	464 300
3 500	547 700
4 000	631 000
Clamping force	420 kN
Oil pressure	min. 230 bar max. 250 bar
Oil volume	max. 120 cm ³
Thickness of brake disc W	min. 30 mm
Weight	425 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Working conditions

- Ambient temperature: -20 °C / +60 °C
- Air humidity: <90%

Monitoring switch

- 240 VAC 1.5 A; 250 VDC 0.1 A
- Cable 5 x 0.75 mm², length 2 m, outer diameter 7.5 mm
- Protection type IP67

Options


- Friction pads with wear indicator cables or sintered friction linings (for high temperatures)
- Corrosion-protected version
- Low temperature version
- Offshore certifications
- ATEX certifications for hazardous areas

Notes




- Includes two pairs of ø 46_{g6} shear pins
- Eyebolts included
- **Fastening:**
6 screws M 33, , class 10.9 with tightening torque 1 950 Nm ±5% μ 0.10 (not supplied)

Brake Caliper HW 165 FHM

spring activated – hydraulically released

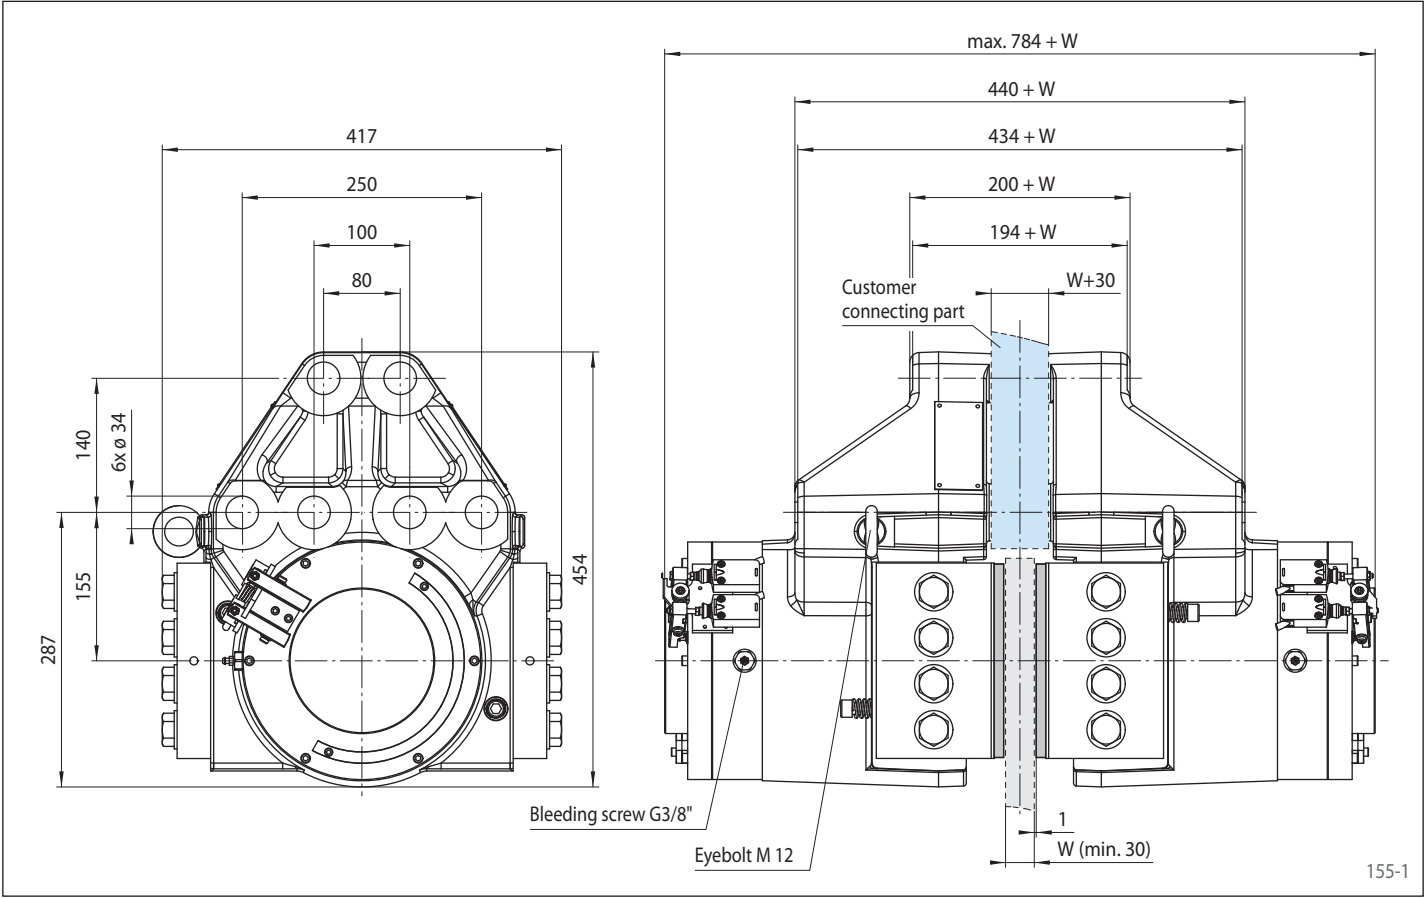


Mounting

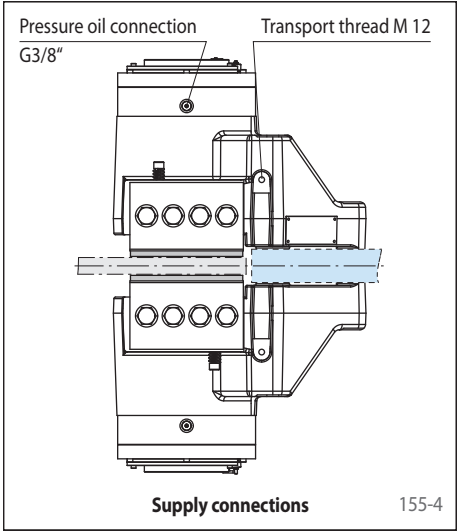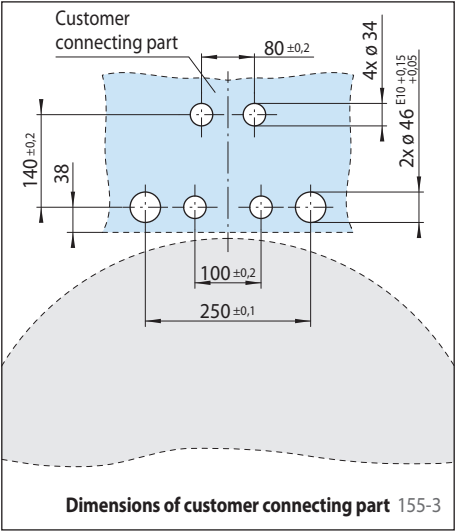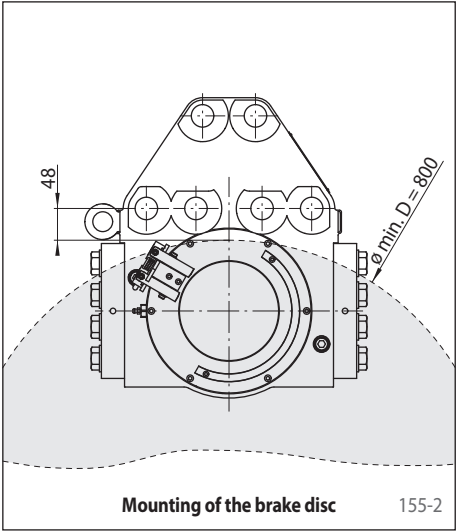

Brake Caliper HS 215 FHM-560 R-V

spring activated – hydraulically released

RINGSPANN®

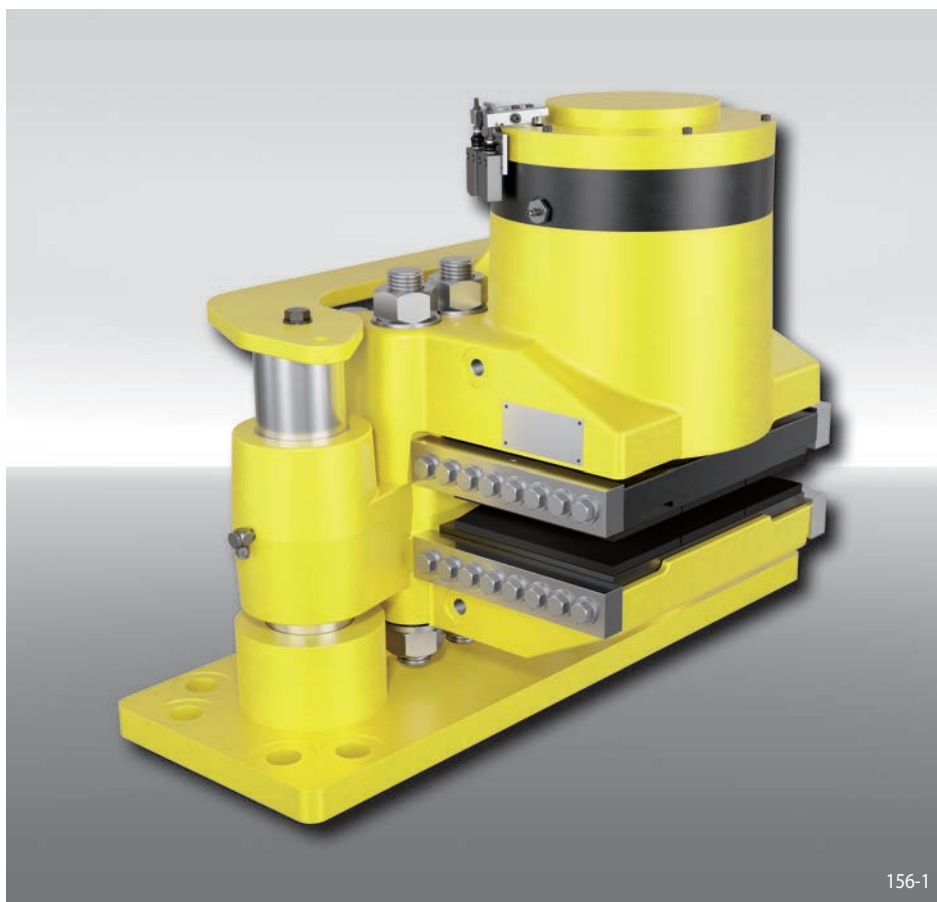

Features	Code
Brake Caliper	H
Floating caliper	S
Frame size 215	215
Spring activated	F
Hydraulically released	H
Manual adjustment to accommodate friction block wear	M
Max. clamping force 560 kN	560
Thruster mounted right available	R
Mounting to the machine parallel to the brake disc	V

Example for ordering

Brake Caliper HS 215 FHM, max. clamping force 560 kN, thruster mounted right, mounting to the machine parallel to the brake disc:

HS 215 FHM-560 R-V

Technical Data

Brake disc diameter	Braking torque
mm	Nm
1 000	164 400
1 250	220 000
1 600	297 800
2 000	386 700
3 000	608 900
3 500	720 000
4 000	831 100
Clamping force	560 kN
Oil pressure	min. 230 bar max. 250 bar
Oil volume	max. 150 cm ³
Thickness of brake disc W	30 mm
Weight	880 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Working conditions

- Ambient temperature: -20 °C / +60 °C
- Air humidity: <90%

Monitoring switch

- 240 VAC 1.5 A; 250 VDC 0.1 A
- Cable 5 x 0.75 mm², length 2 m, outer diameter 7.5 mm
- Protection type IP67

Optionen

- Hydraulic Power Unit
- Friction pads with wear indicator cables or sintered friction linings (for high temperatures)
- Corrosion-protected version
- Low temperature version
- Offshore certifications
- ATEX certifications for hazardous areas


Notes

- Eyebolts included
- **Fastening:**
8 screws M 36, class 8.8 with tightening torque 2 200 Nm ±10% μ 0.15 (not supplied)



Brake Caliper HS 215 FHM-560 R-V

RINGSPANN®

spring activated – hydraulically released

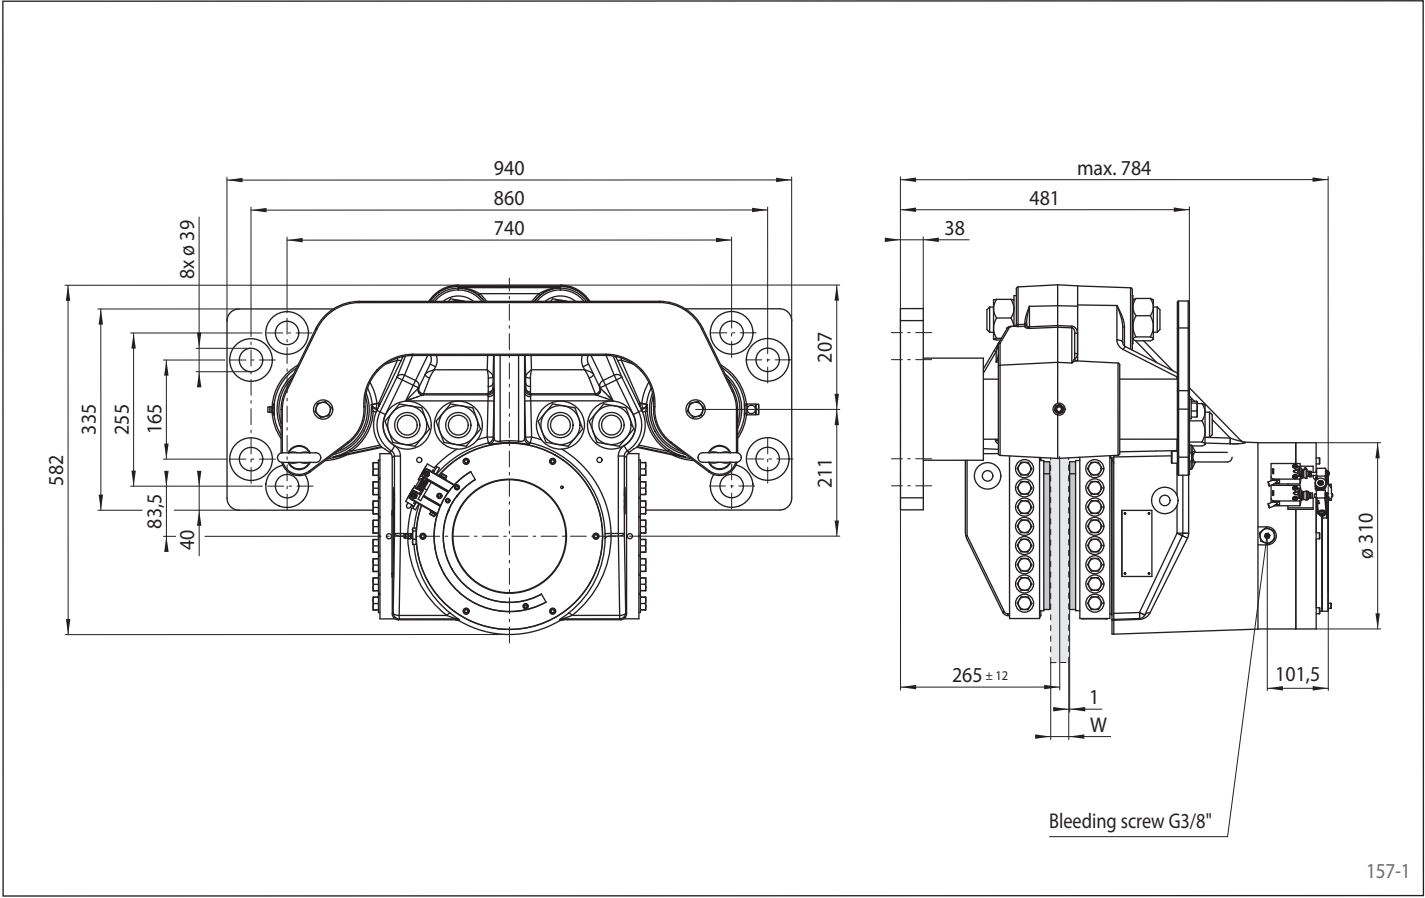


Mounting

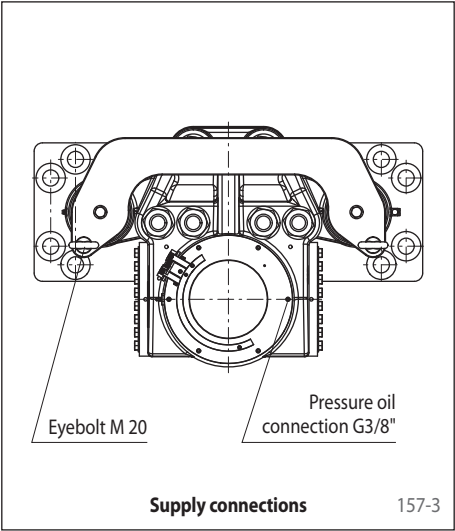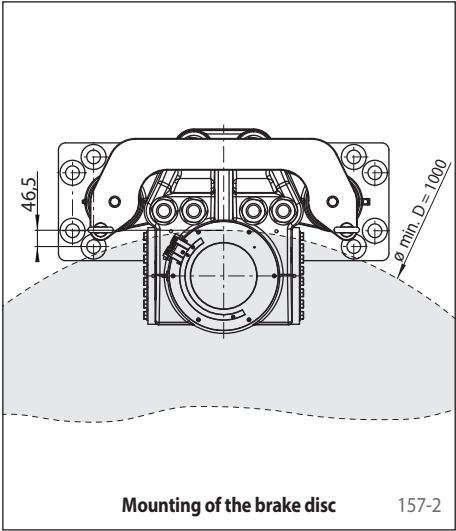

Brake Caliper HS 215 FHM-560 ... -H

spring activated – hydraulically released

RINGSPANN®

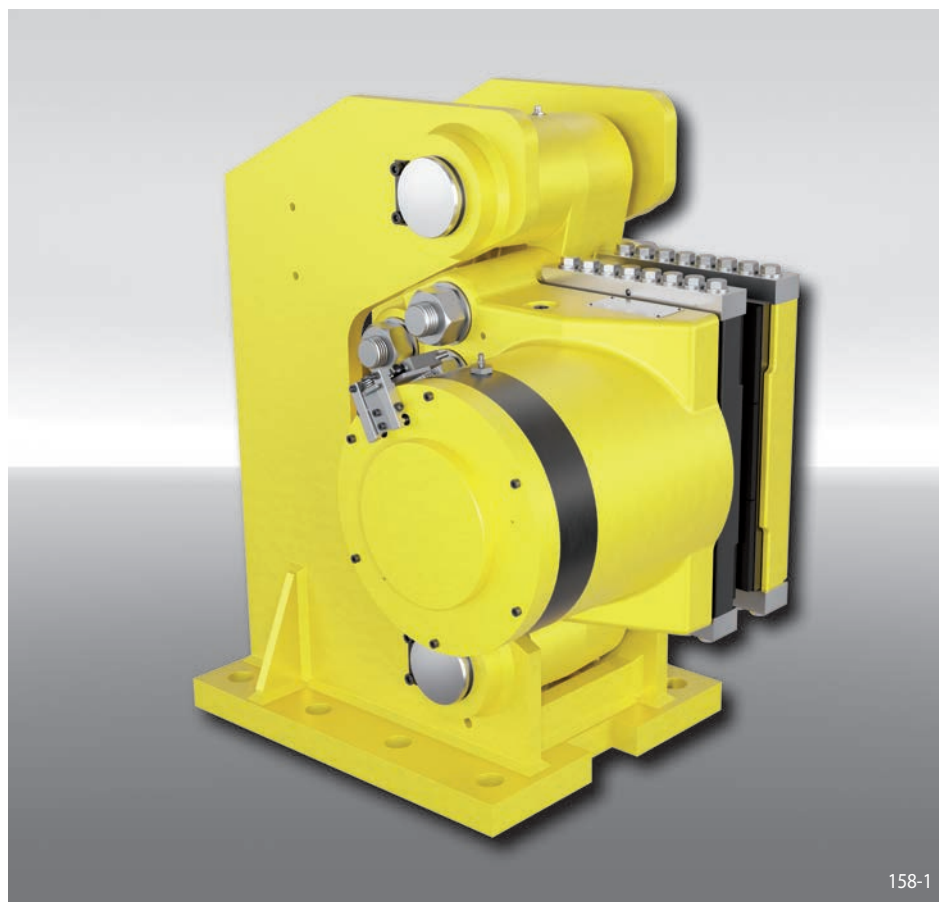

Features

Features	Code
Brake Caliper	H
Floating caliper	S
Frame size 215	215
Spring activated	F
Hydraulically released	H
Manual adjustment to accommodate friction block wear	M
Max. clamping force 560 kN	560
Thruster mounted right or left available	R L
Mounting to the machine at right angles to the brake disc	H

Example for ordering

Brake Caliper HS 215 FHM, max. clamping force 560 kN, thruster mounted left, mounting to the machine at right angles to the brake disc

HS 215 FHM-560 L-H

Technical Data

Brake disc diameter	Braking torque
mm	Nm
1 000	164 400
1 250	220 000
1 600	297 800
2 000	386 700
3 000	608 900
3 500	720 000
4 000	831 100
Clamping force	560 kN
Oil pressure	min. 230 bar max. 250 bar
Oil volume	max. 150 cm ³
Thickness of brake disc W	30 mm
Weight	880 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Working conditions

- Ambient temperature: -20 °C / +60 °C
- Air humidity: <90%

Monitoring switch

- 240 VAC 1.5 A; 250 VDC 0.1 A
- Cable 5 x 0.75 mm², length 2 m, outer diameter 7.5 mm
- Protection type IP67

Optionen

- Integrated Hydraulic Power Unit
- Friction pads with wear indicator cables or sintered friction linings (for high temperatures)
- Corrosion-protected version
- Low temperature version
- Offshore certifications
- ATEX certifications for hazardous areas


Notes

- Eyebolts included
- **Fastening:**
8 screws M 36, class 8.8 with tightening torque 2 200 Nm ±10% μ 0.15 (not supplied)



Brake Caliper HS 215 FHM-560 ... -H

RINGSPANN®

spring activated – hydraulically released

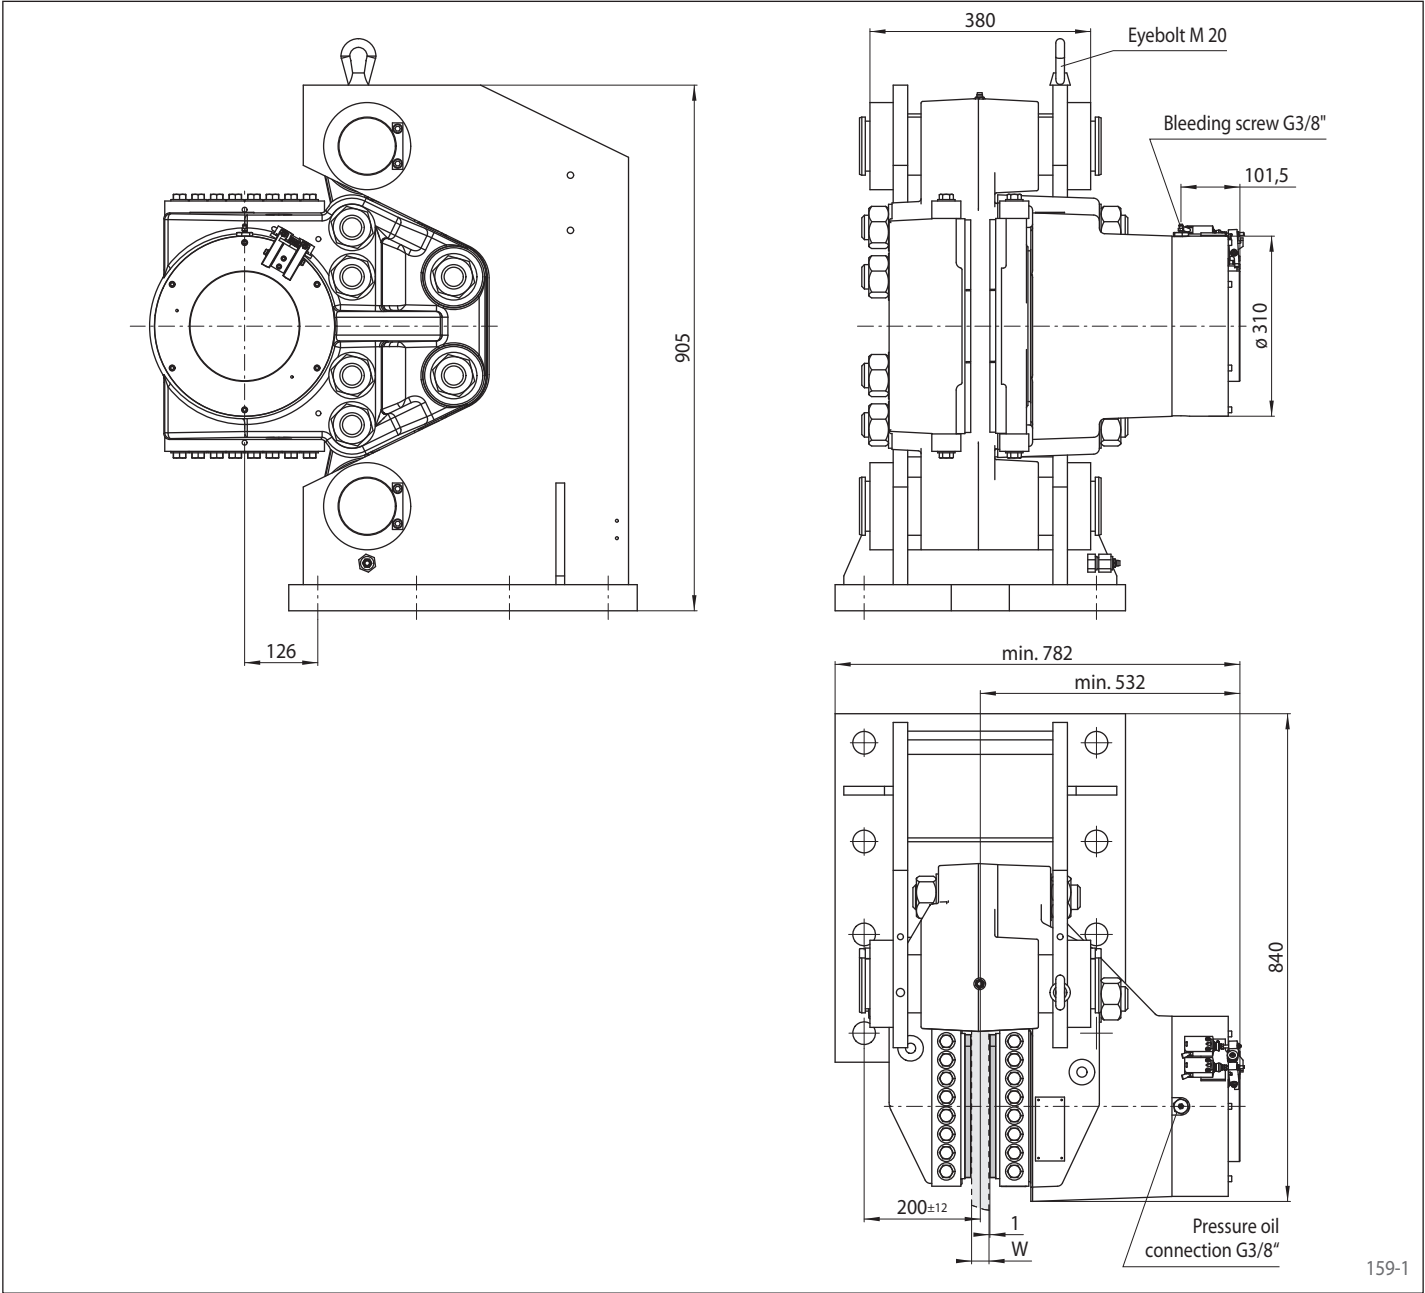


Mounting

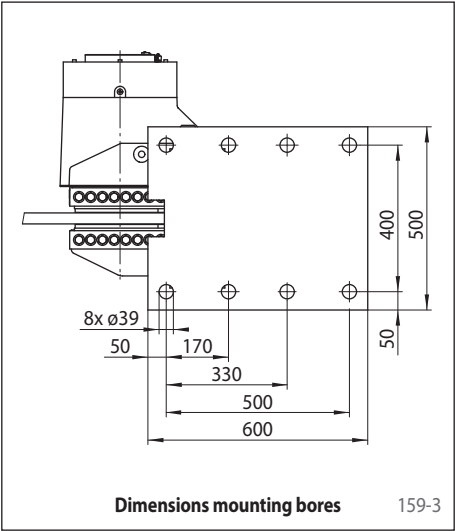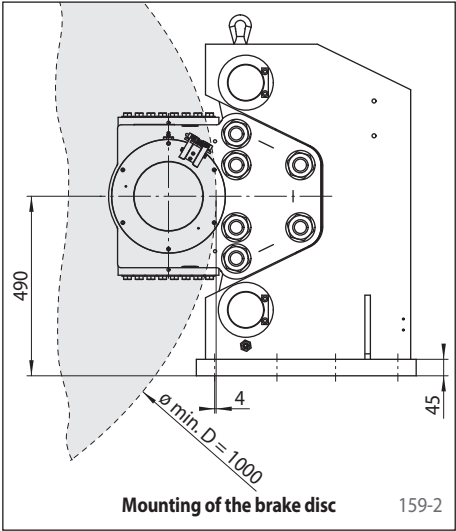

Brake Caliper HW 215 FHM

spring activated – hydraulically released

RINGSPANN®

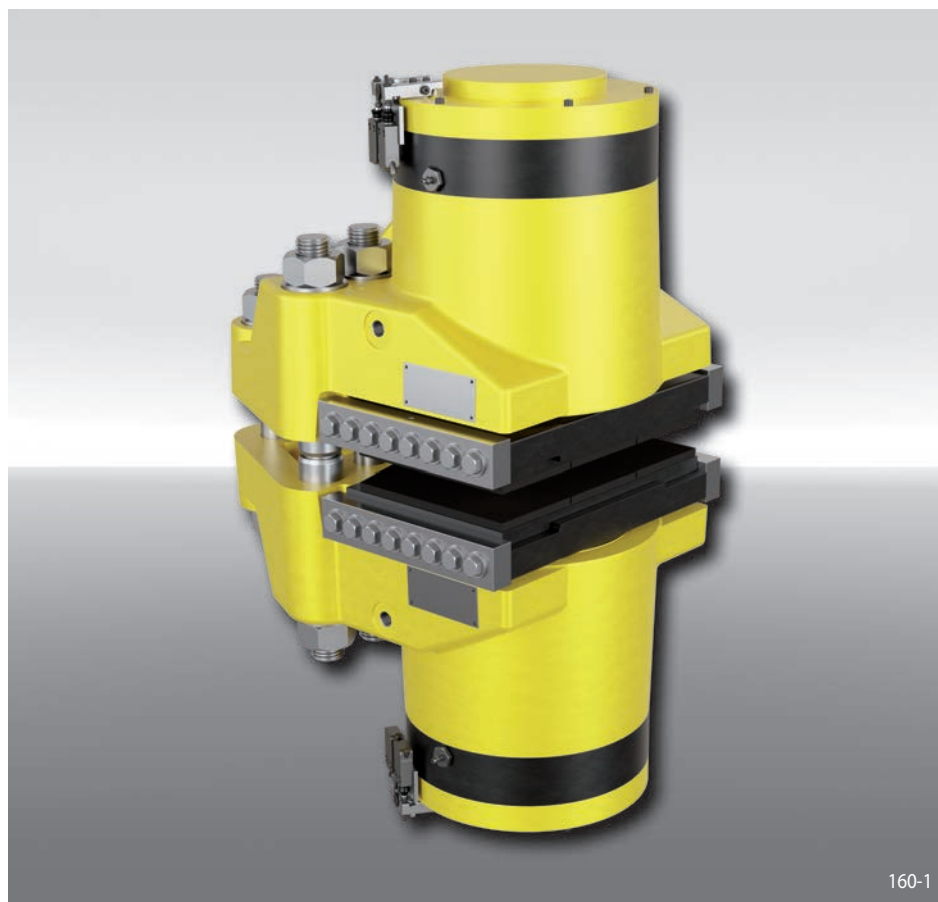

Features

	Code
Brake Caliper	H
Standard	W
Frame size 215	215
Spring activated	F
Hydraulically released	H
Manual adjustment to accommodate friction block wear	M
Max. clamping force 560 kN	560

Example for ordering

Brake Caliper HW 215 FHM,
max. clamping force 560 kN:

HW 215 FHM-560

Technical Data

Brake disc diameter	Braking torque
mm	Nm
1 000	164 400
1 250	220 000
1 600	297 800
2 000	386 700
3 000	608 900
3 500	720 000
4 000	831 100
Clamping force	560 kN
Oil pressure	min. 230 bar max. 250 bar
Oil volume	max. 270 cm ³
Thickness of brake disc W	min. 30 mm
Weight	650 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Working conditions

- Ambient temperature: -20 °C / +60 °C
- Air humidity: <90%

Monitoring switch



- 240 VAC 1.5 A; 250 VDC 0.1 A
- Cable 5 x 0.75 mm², length 2 m, outer diameter 7.5 mm
- Protection type IP67

Options

- Friction pads with wear indicator cables or sintered friction linings (for high temperatures)
- Corrosion-protected version
- Low temperature version
- Offshore certifications
- ATEX certifications for hazardous areas


Notes

- Includes two pairs of ø 55_{g6} shear pins
- Eyebolts included
- **Fastening:**
6 screws M 42, class 10.9 with tightening torque 4 100 Nm ±5% μ 0.10 (not supplied)

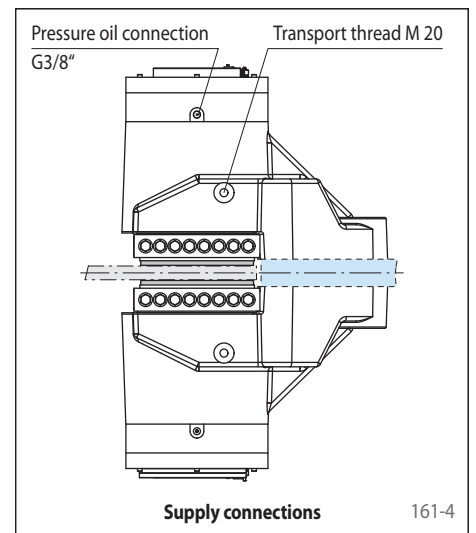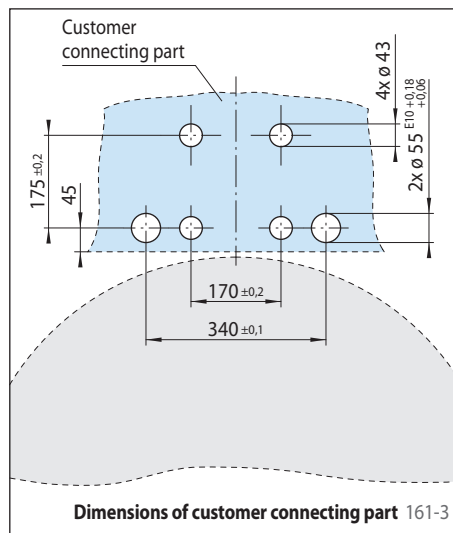

Brake Caliper HI 180 HUK

hydraulically activated – non-releasing
as yaw brake in wind turbines

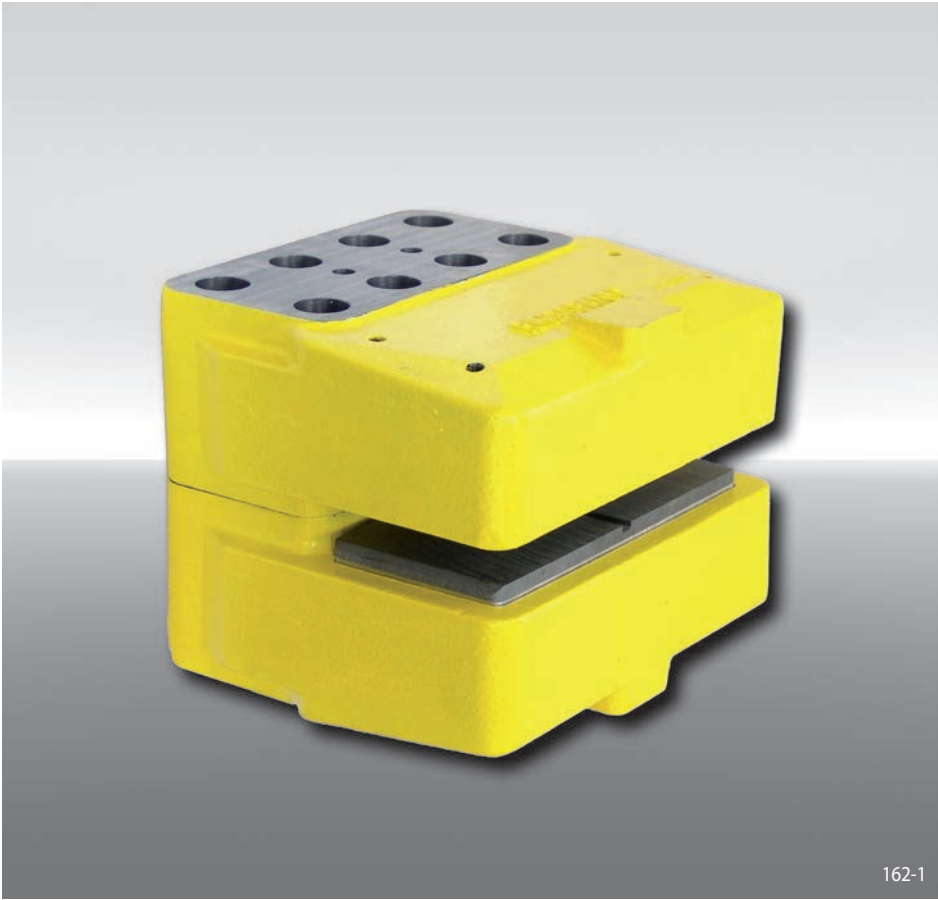


Features	Code
Brake Caliper	H
With inside-mounted brake pads	I
With piston diameter 2 x 90 mm	180
Hydraulically activated	H
Non-releasing	U
No adjustment to accommodate friction block wear	K
Max. clamping force 200 kN	200

Example for ordering

Brake Caliper HI 180 HUK,
max. clamping force 200 kN:

HI 180 HUK - 200

Technical Data

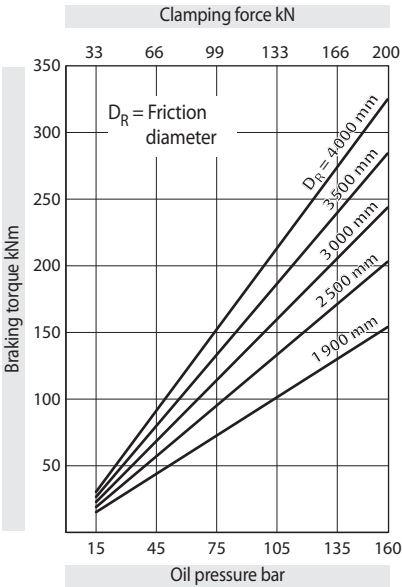

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

- Oil pressure: min. 15 bar
max. 160 bar
- Oil volume: max. 190 cm³
- Weight: ca. 65 kg

Other features

- High safety against leakage
- Painted with surface coating class C4-L according to ISO 12944
- For brake disc thickness W = 30 mm; larger brake disc thicknesses can be achieved with the use of a spacer installed by the customer


Accessories

- Optional painting with surface coating class C4-H or C5M-H (offshore) according to ISO 12944

Brake Caliper HI 180 HUK




RINGSPANN®

hydraulically activated – non-releasing
as yaw brake in wind turbines

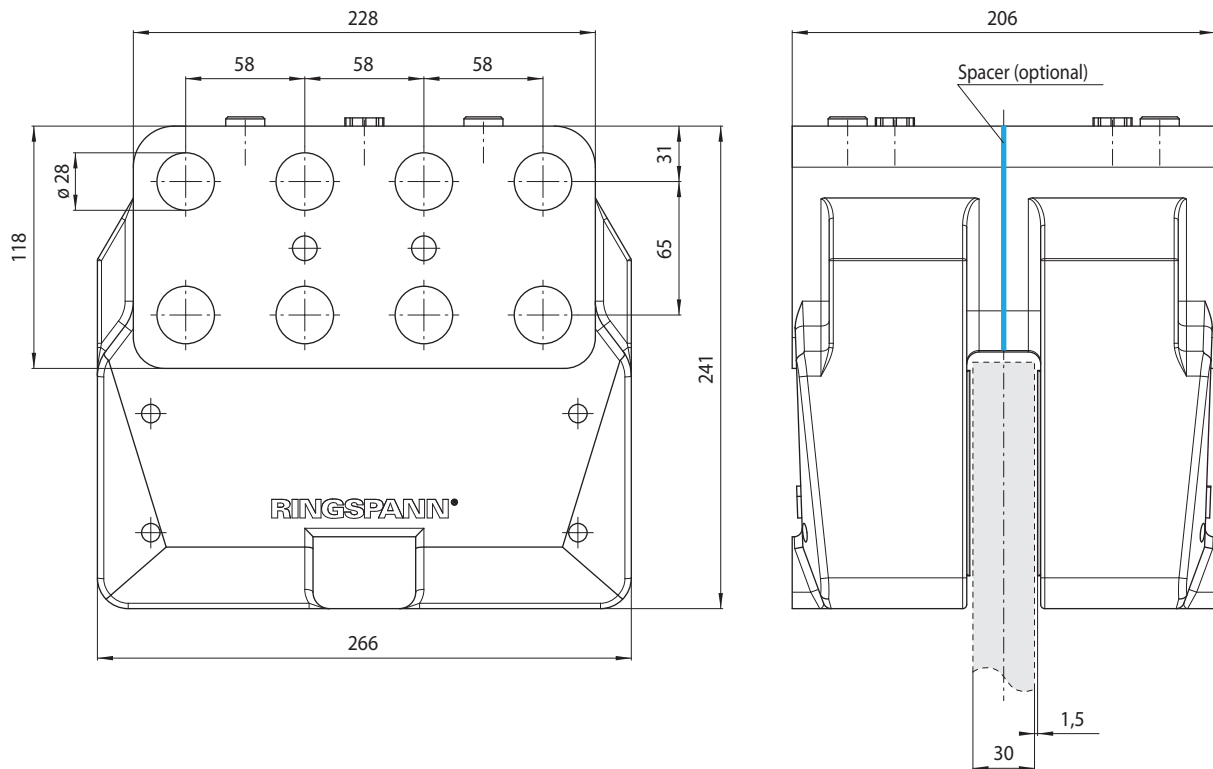

163-1

Mounting

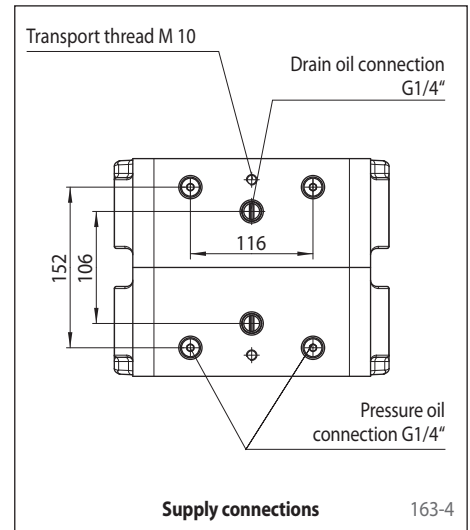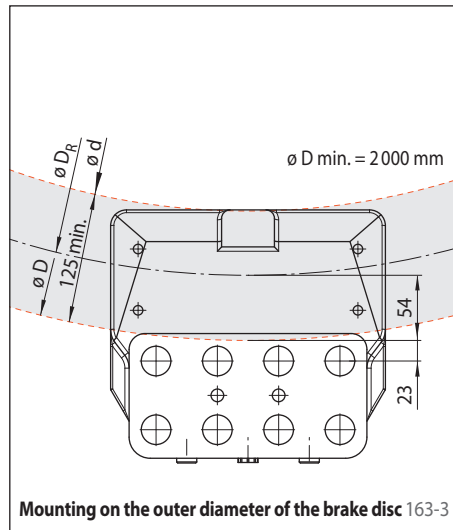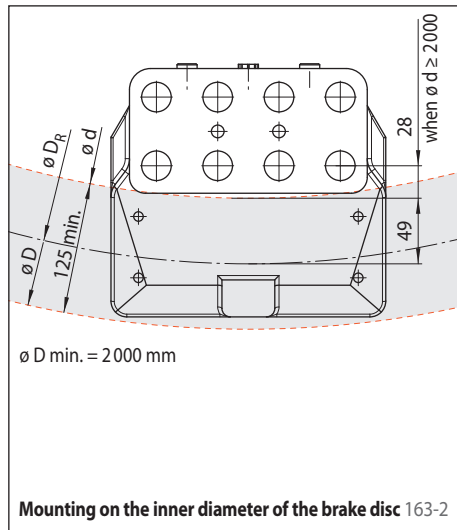

Calculation of the friction diameter

Mounting on the inner diameter of the brake disc:

$$D_R = d + (2 \cdot 49 \text{ mm})$$

(when $d \geq 2000 \text{ mm}$)

Mounting on the outer diameter of the brake disc:

$$D_R = D - (2 \cdot 54 \text{ mm})$$

Calculation of the braking torque

$$M_B = \frac{D_R}{0,786} \cdot p \cdot \mu$$

Formula symbols

- M_B = Braking torque [Nm]
- D = Outer diameter brake disc [mm]
- d = Inner diameter brake disc [mm]
- D_R = Friction diameter [mm]
- p = Oil pressure [bar]
- μ = Friction coefficient

Brake Caliper HW 180 HUK

hydraulically activated – non-releasing
as yaw brake in wind turbines




Features	Code
Brake Caliper	H
Standard	W
With piston diameter 2 x 90 mm	180
Hydraulically activated	H
Non-releasing	U
No adjustment to accommodate friction block wear	K
Max. clamping force 200 kN	200

Example for ordering

Brake Caliper HW 180 HUK,
max. clamping force 200 kN:

HW 180 HUK - 200

Technical Data

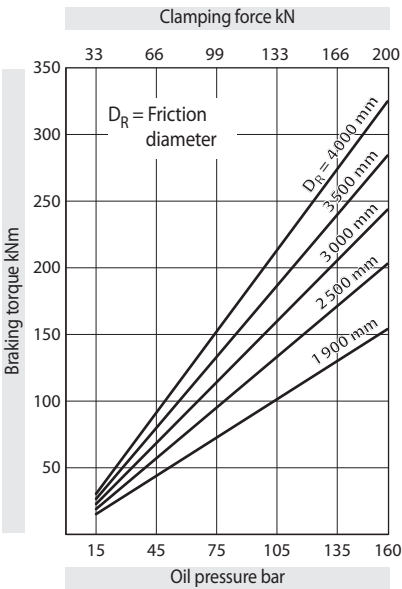

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

- Oil pressure: min. 15 bar
max. 160 bar
- Oil volume: max. 190 cm³
- Weight: ca. 65 kg

Other features

- High safety against leakage
- Easy change of friction blocks
- Painted with surface coating class C4-L according to ISO 12944
- For brake disc thickness $W = 30\text{ mm}$; larger brake disc thicknesses can be achieved with the use of a spacer installed by the customer


Accessories

- Optional painting with surface coating class C4-H or C5M-H (offshore) according to ISO 12944

Brake Caliper HW 180 HUK




RINGSPANN®

hydraulically activated – non-releasing
as yaw brake in wind turbines

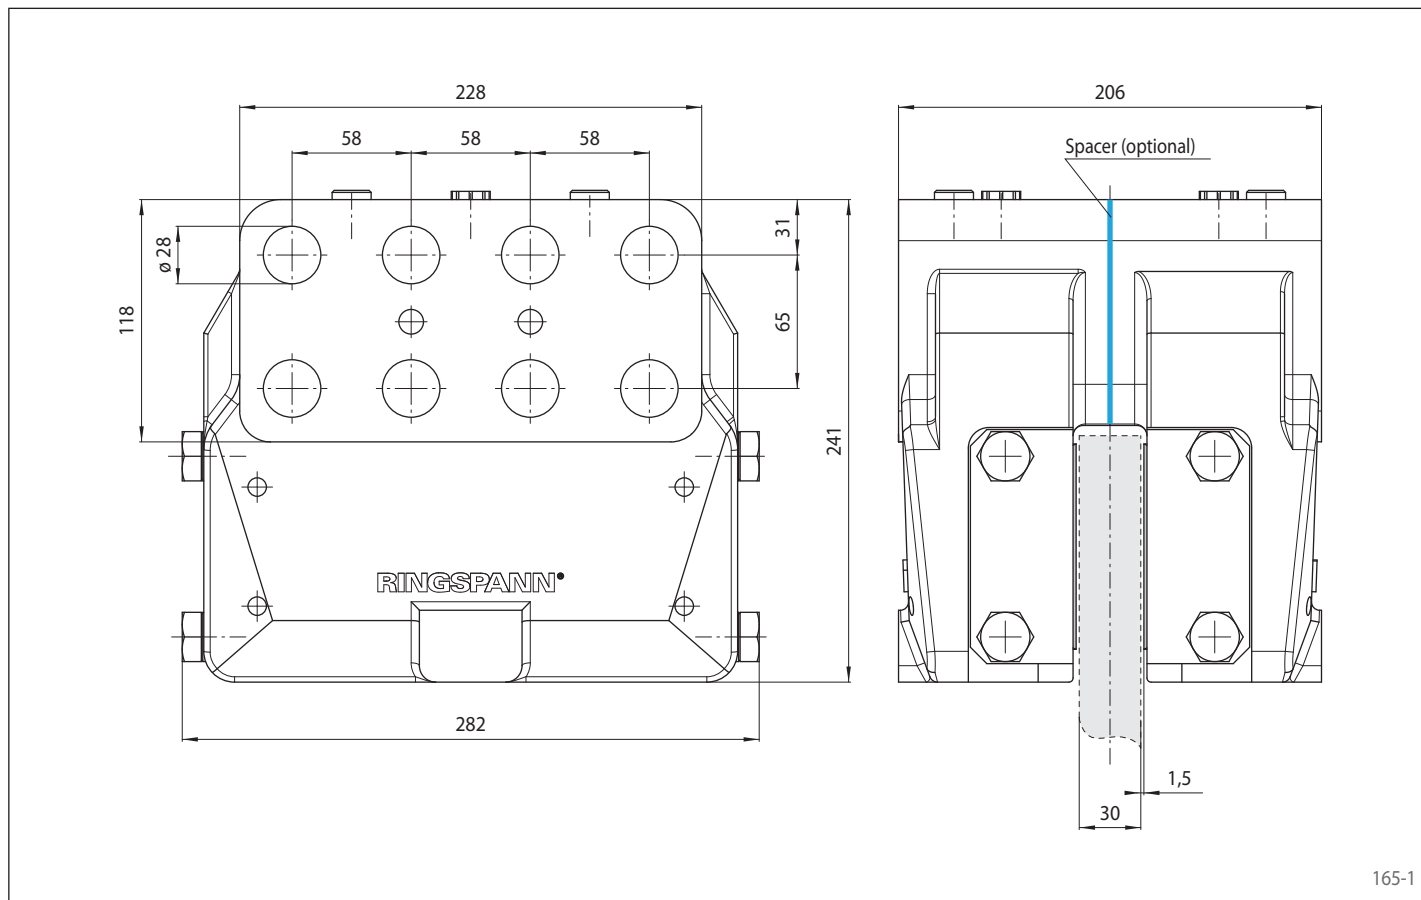

165-1

Mounting

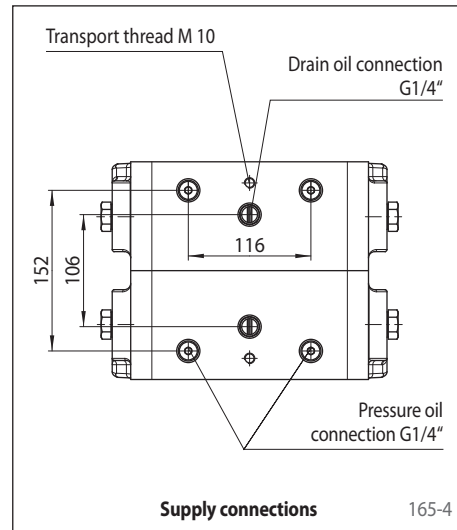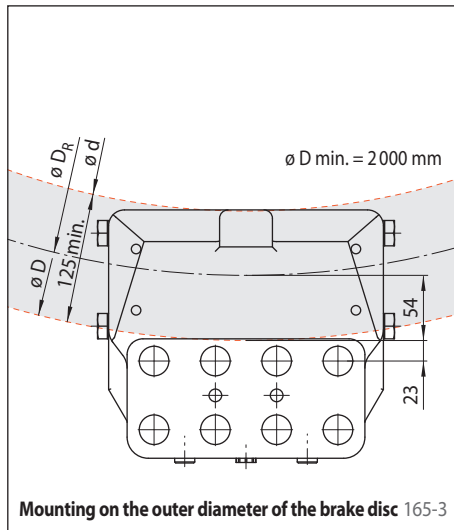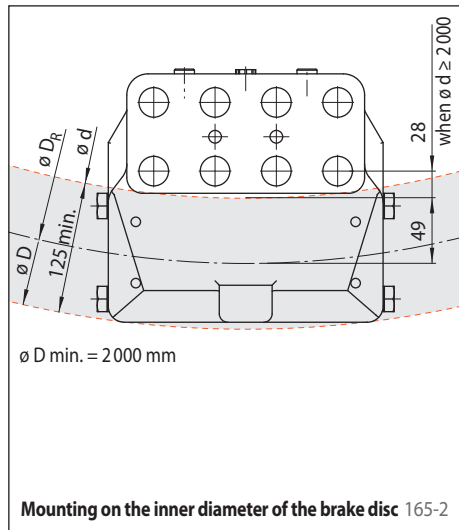

Calculation of the friction diameter

Mounting on the inner diameter of the brake disc:

$$D_R = d + (2 \cdot 49 \text{ mm})$$

(when $d \geq 2000 \text{ mm}$)

Mounting on the outer diameter of the brake disc:

$$D_R = D - (2 \cdot 54 \text{ mm})$$

Calculation of the braking torque


$$M_B = \frac{D_R}{0,786} \cdot p \cdot \mu$$

Formula symbols


- M_B = Braking torque [Nm]
- D = Outer diameter brake disc [mm]
- d = Inner diameter brake disc [mm]
- D_R = Friction diameter [mm]
- p = Oil pressure [bar]
- μ = Friction coefficient

Brake Caliper HW 040 HFA

hydraulically activated – spring released

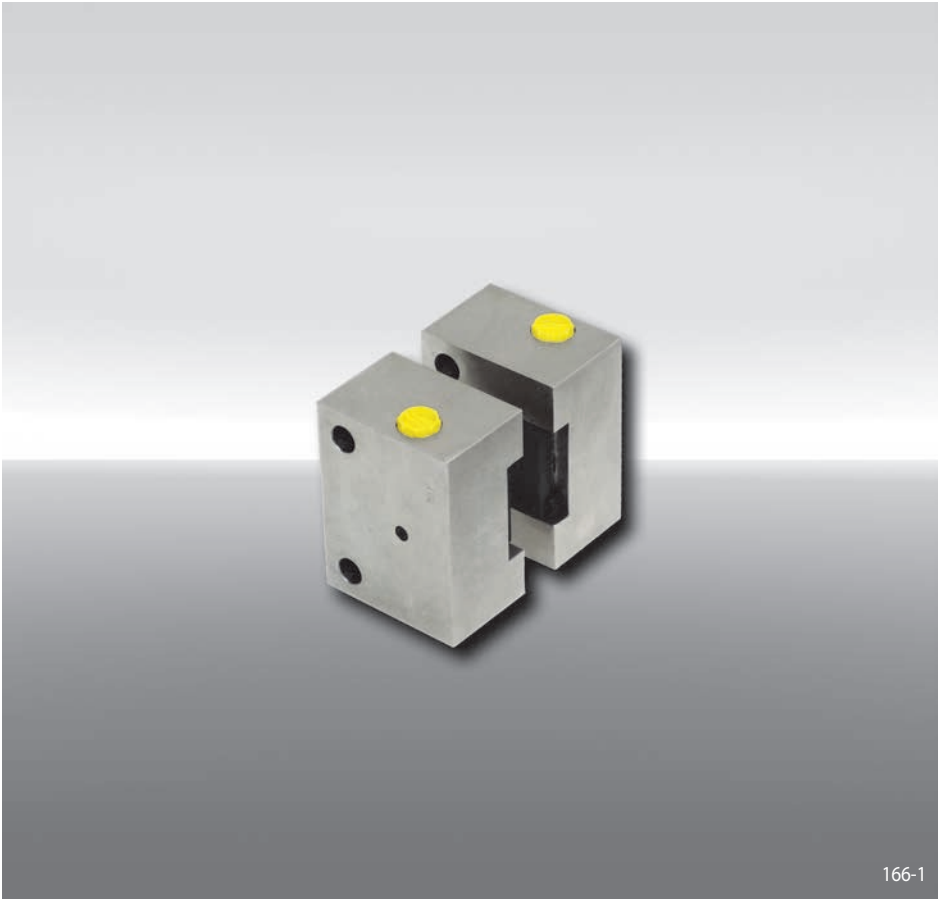


166-1

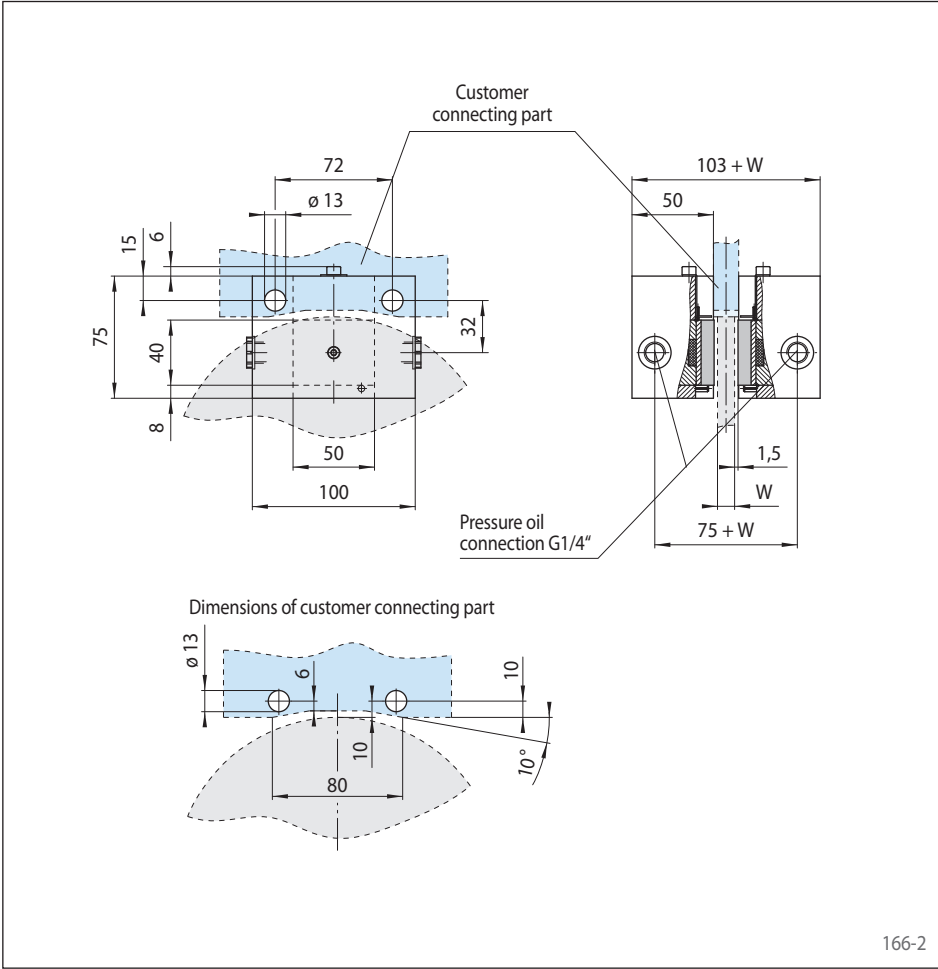

166-2

Features	Code
Brake Caliper	H
Standard	W
With piston diameter 40 mm	040
Hydraulically activated	H
Spring released	F
Automatic adjustment to accommodate friction block wear	A
Max. clamping force 11 kN	011
Example for ordering Brake Caliper HW 040 HFA, max. clamping force 11 kN: HW 040 HFA - 011	

Technical Data

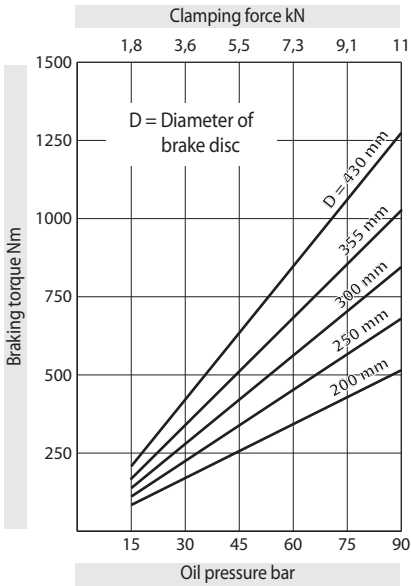

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,3.


Oil pressure:	min. 5 bar max. 90 bar
Oil volume:	max. 20 cm ³
Weight:	5,5 kg

Other features


- The thickness of the customer connecting part results from the thickness of the brake disc W plus 3 mm

Brake Caliper HW 063 HFA

hydraulically activated – spring released

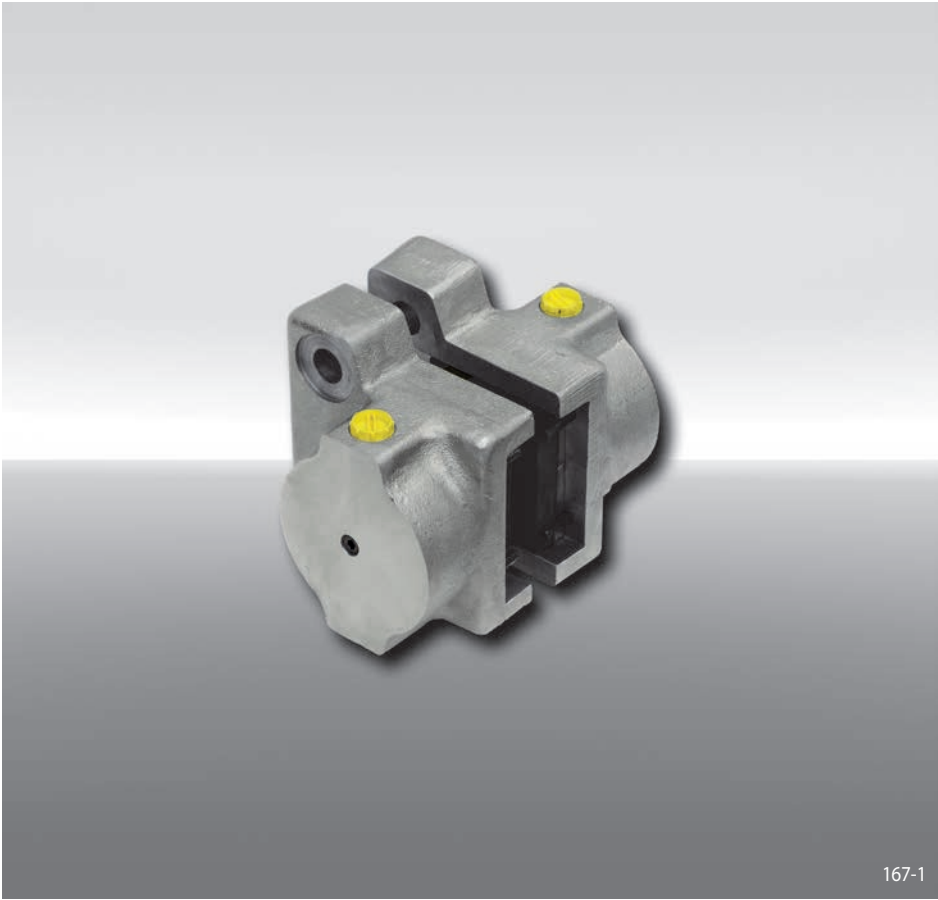

167-1

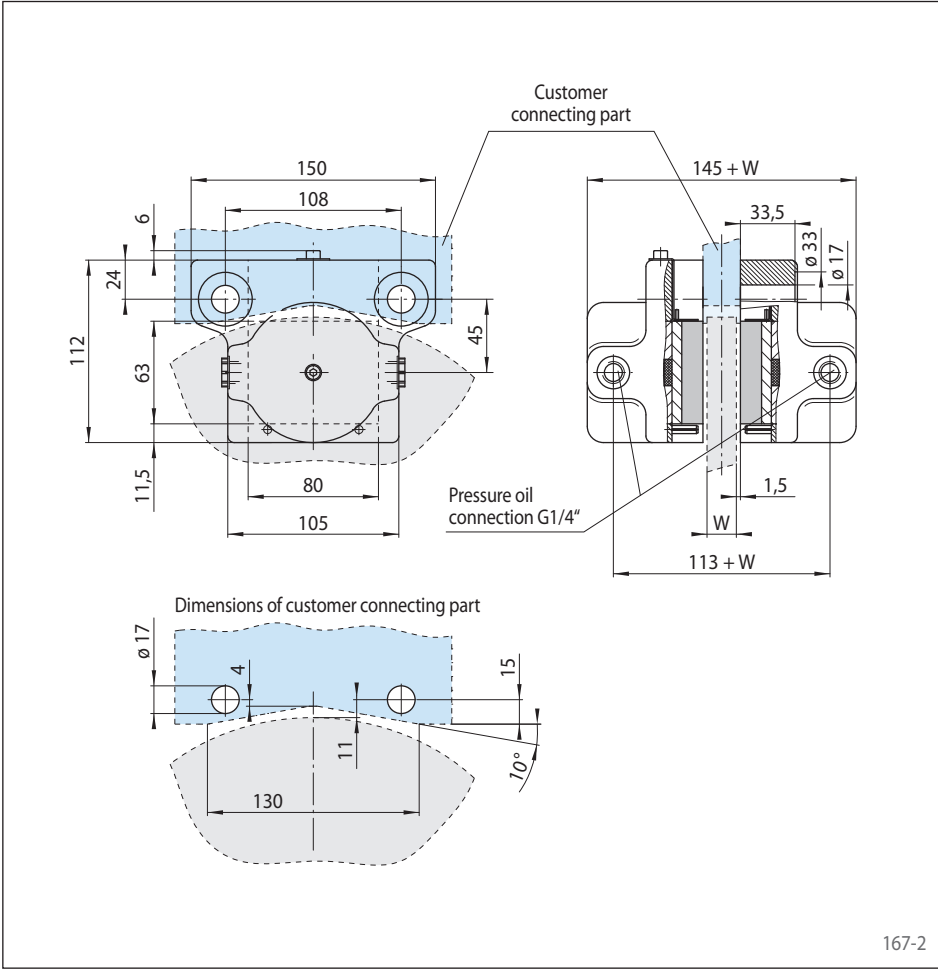

167-2


Features	Code
Brake Caliper	H
Standard	W
With piston diameter 63 mm	063
Hydraulically activated	H
Spring released	F
Automatic adjustment to accommodate friction block wear	A
Max. clamping force 28 kN	028

Example for ordering

Brake Caliper HW 063 HFA,
max. clamping force 28 kN:

HW 063 HFA - 028

Technical Data

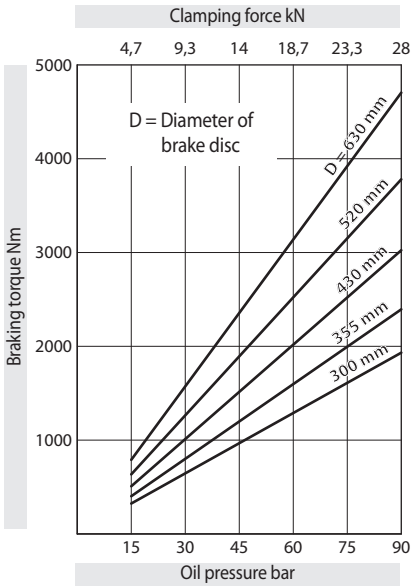

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,3.

Oil pressure: min. 5 bar
max. 90 bar

Oil volume: max. 78 cm³


Weight: 8 kg

Other features

- The thickness of the customer connecting part results from the thickness of the brake disc W plus 3 mm

Brake Caliper HS 075 HFK

hydraulically activated – spring released

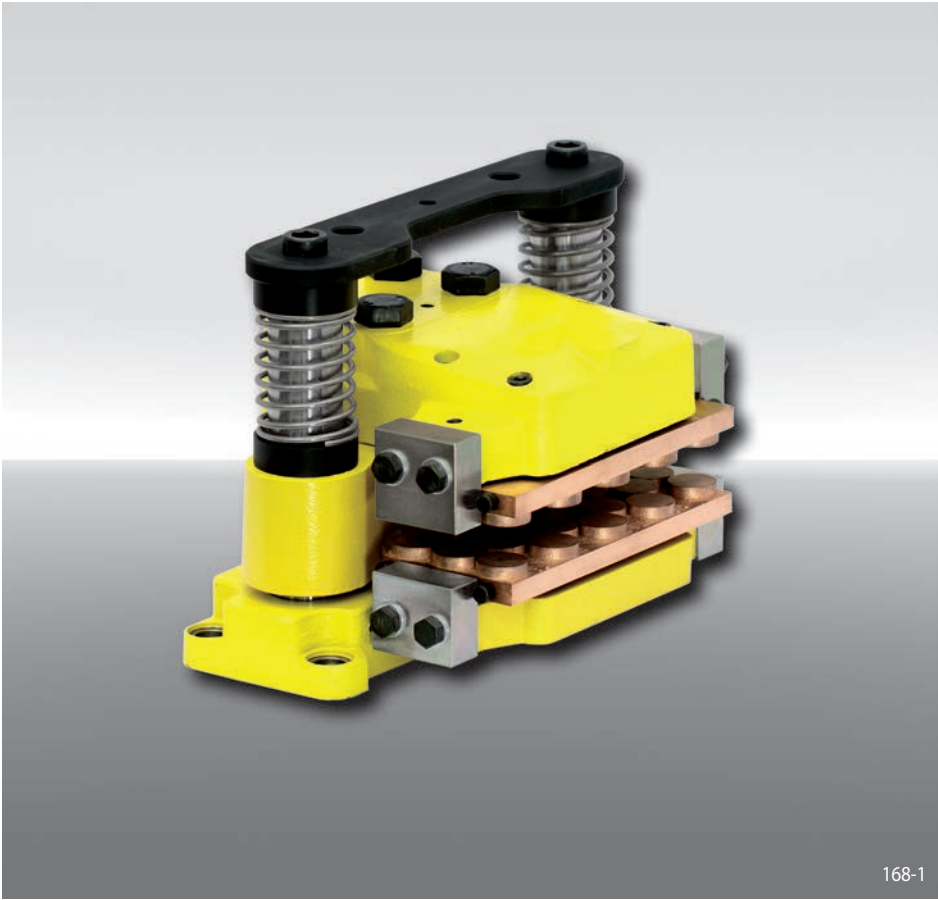


Features	Code
Brake Caliper	H
Floating caliper	S
With piston diameter 75 mm	075
Hydraulically activated	H
Spring released	F
No adjustment to accommodate friction block wear	K
Max. clamping force 55 kN	055

Example for ordering

Brake Caliper HS 075 HFK,
max. clamping force 55 kN:

HS 075 HFK - 055

Technical Data

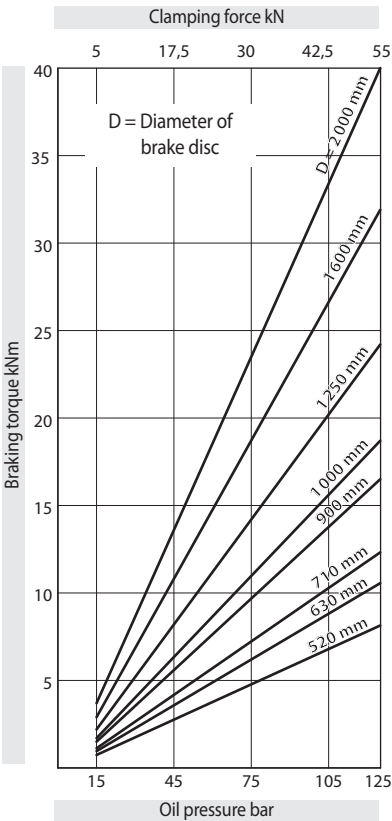

Oil pressure: min. 15 bar
max. 125 bar

Oil volume: max. 70 cm³

Weight: ca. 80 kg

Other features

- High safety against leakage
- Easy change of friction blocks
- Painted with surface coating class C4-L according to ISO 12944
- For brake disc thickness W = 20 mm; brake disc thicknesses of up to 40 mm can be achieved with the use of a spacer installed by the customer


Accessories

- Inductive proximity switch for "brake released" operating status
- Inductive proximity switch for brake pad wear control
- Optional painting with surface coating class C4-H or C5M-H (offshore) according to ISO 12944




The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

Brake Caliper HS 075 HFK

hydraulically activated – spring released

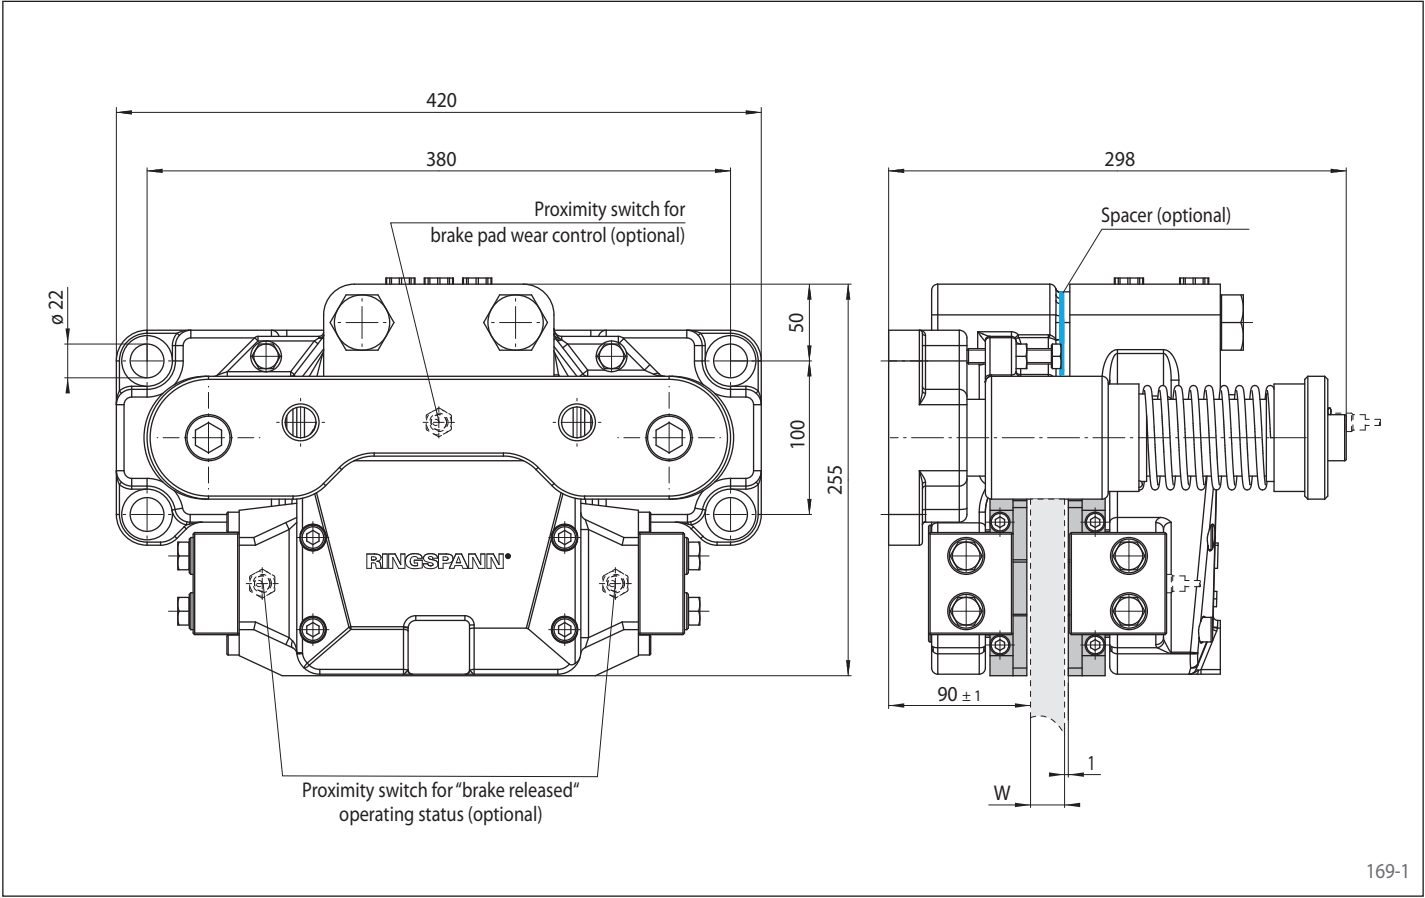


Mounting

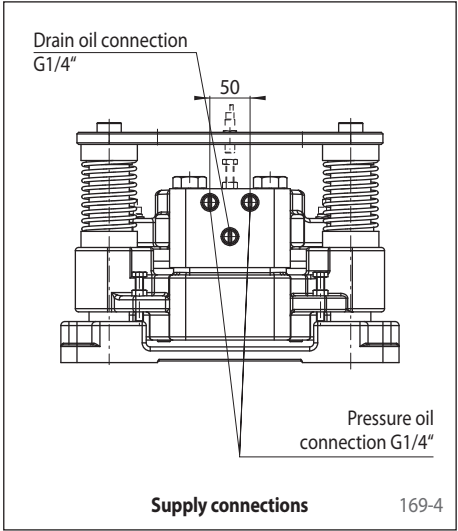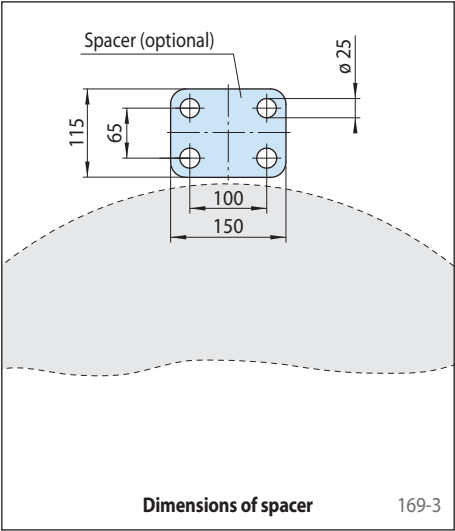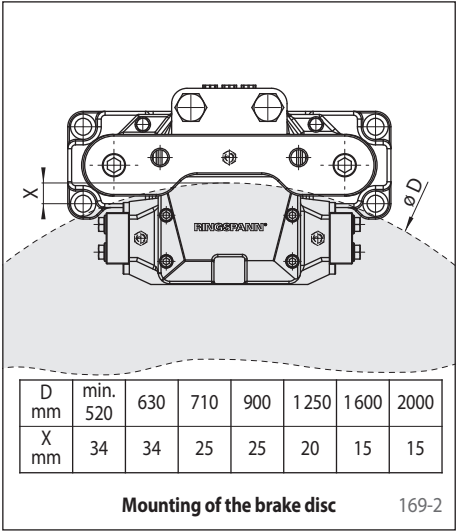


Brake Caliper HW 075 HFK

hydraulically activated – spring released

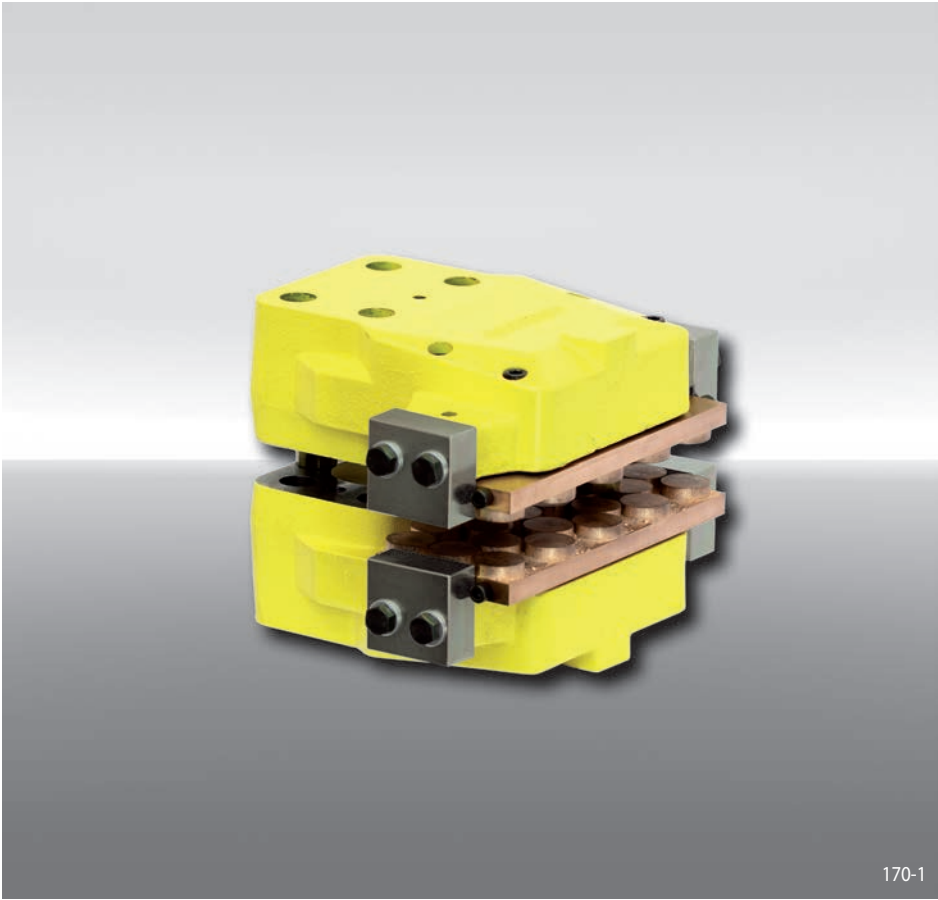

Features	Code
Brake Caliper	H
Standard	W
With piston diameter 75 mm	075
Hydraulically activated	H
Spring released	F
No adjustment to accommodate friction block wear	K
Max. clamping force 55 kN	055
Example for ordering	
Brake Caliper HW 075 HFK, max. clamping force 55 kN:	
HW 075 HFK - 055	

Technical Data

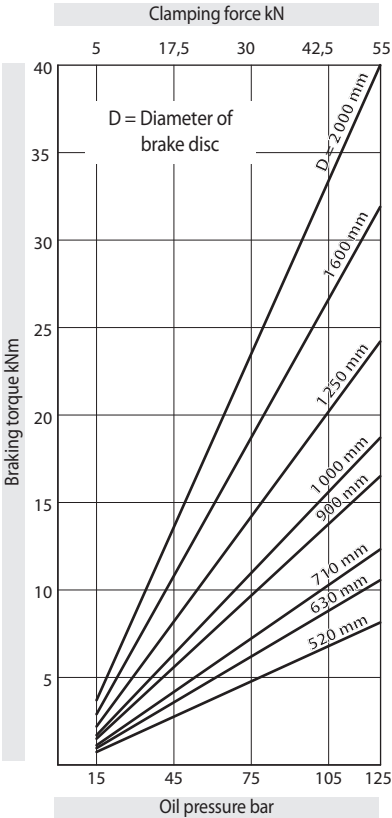

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

Oil pressure: min. 15 bar
max. 125 bar

Oil volume: max. 75 cm³

Weight: ca. 60 kg

Other features

- High safety against leakage
- Easy change of friction blocks
- Painted with surface coating class C4-L according to ISO 12944
- The thickness of the customer connecting part results from the thickness of the brake disc W plus 3 mm


Accessories

- Inductive proximity switch for "brake released" operating status
- Optional painting with surface coating class C4-H or C5M-H (offshore) according to ISO 12944




Brake Caliper HW 075 HFK

RINGSPANN®

hydraulically activated – spring released

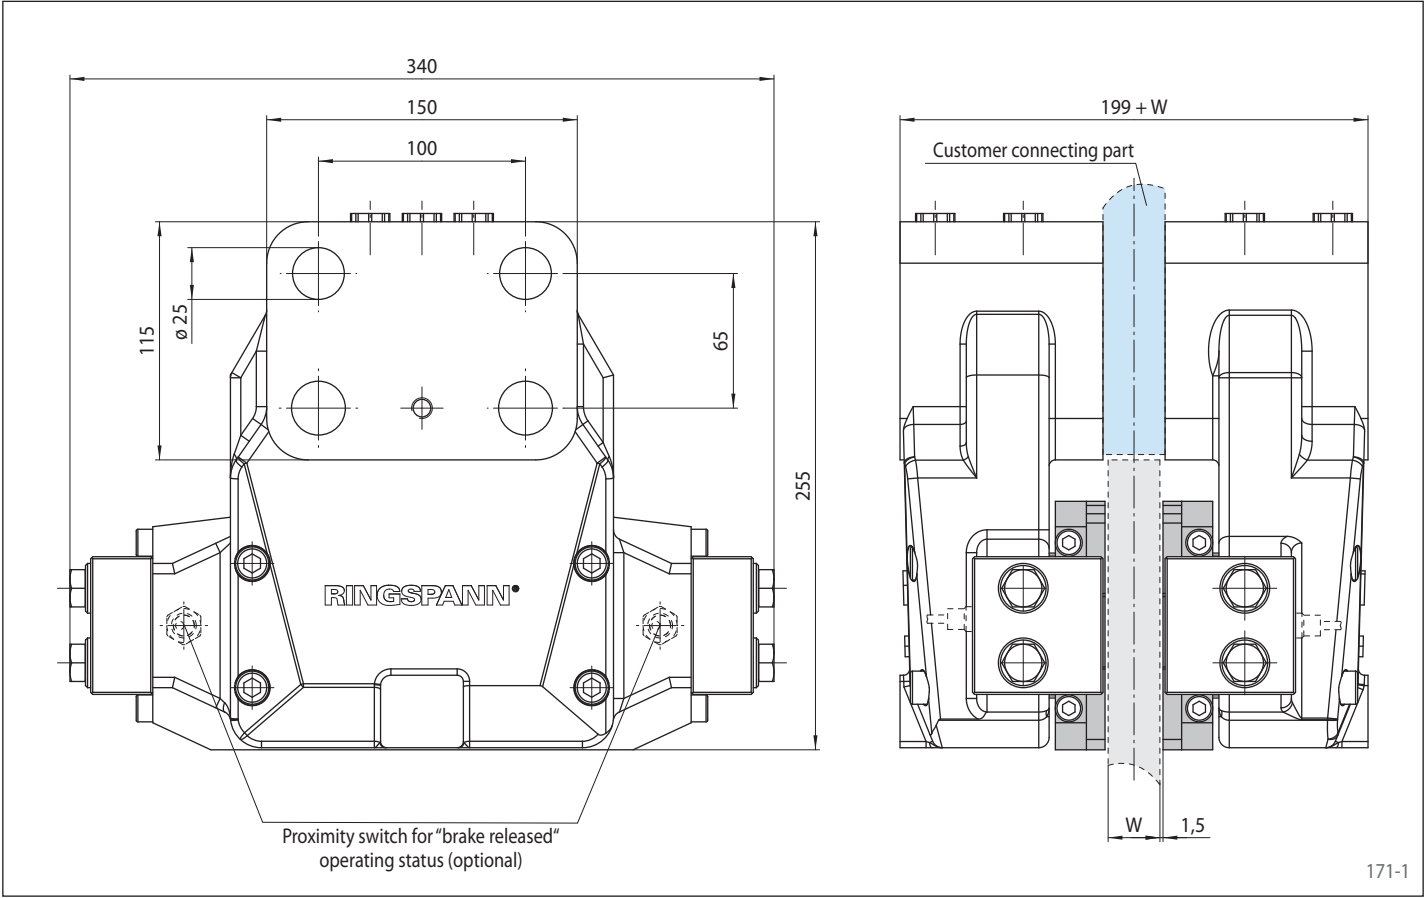


Mounting

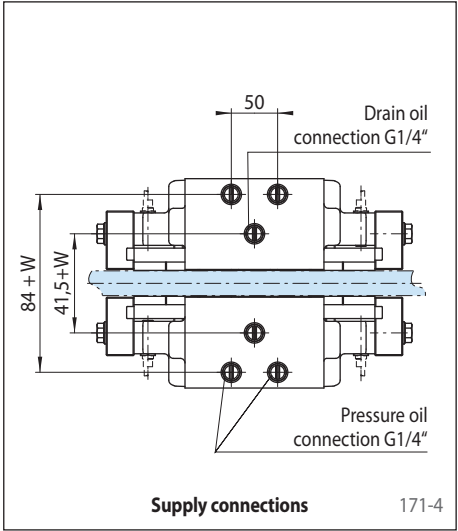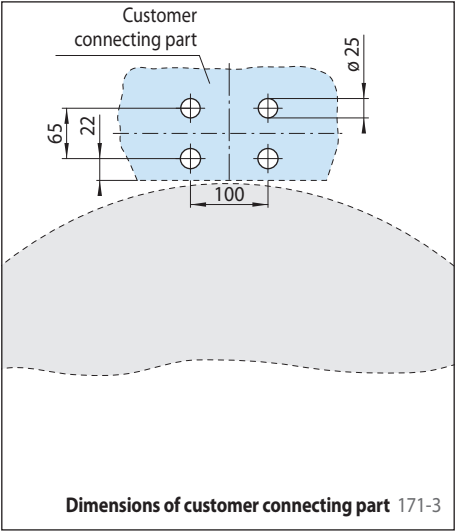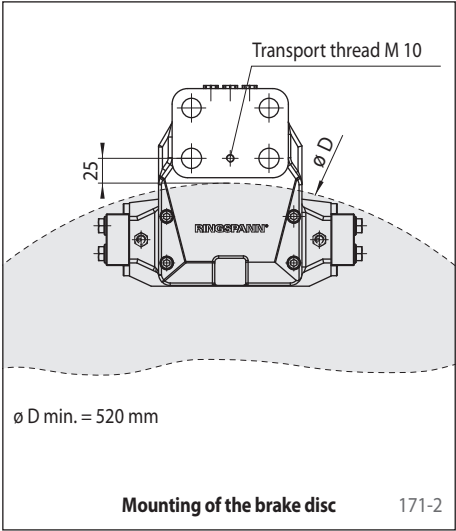

Brake Caliper HW 100 HFA

hydraulically activated – spring released

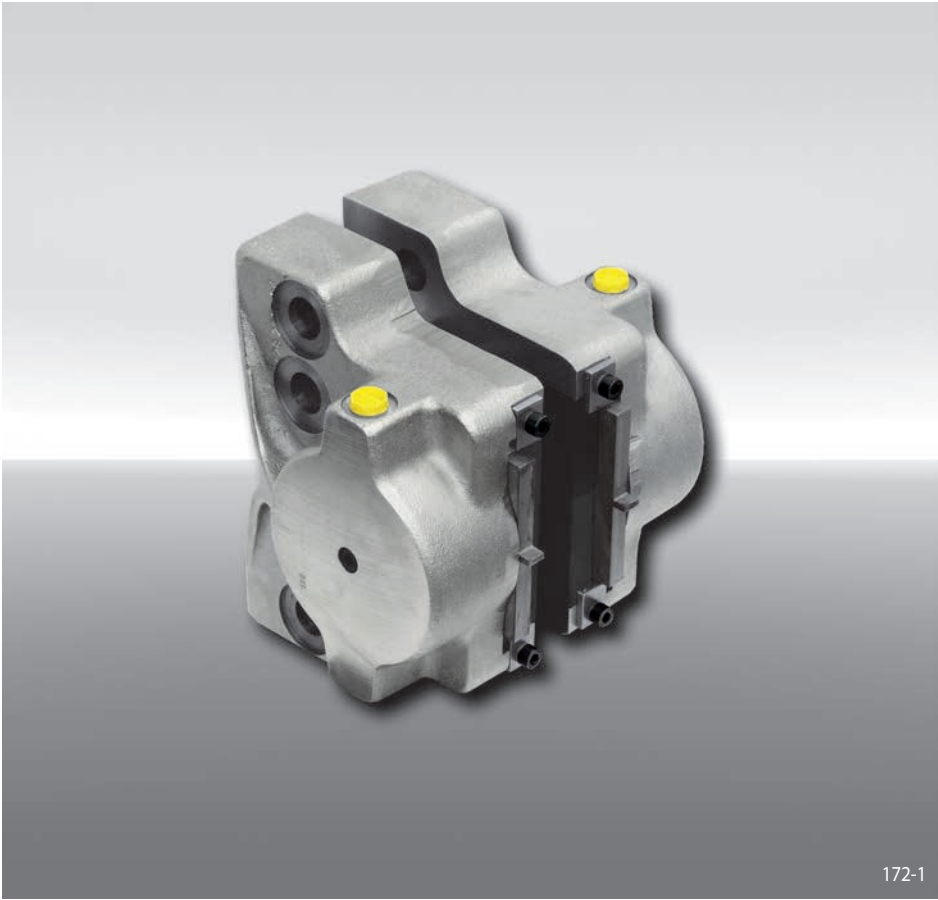


Features	Code
Brake Caliper	H
Standard	W
With piston diameter 100 mm	100
Hydraulically activated	H
Spring released	F
Automatic adjustment to accommodate friction block wear	A
Max. clamping force 70 kN	070

Example for ordering

Brake Caliper HW 100 HFA,
max. clamping force 70 kN:

HW 100 HFA - 070

Technical Data

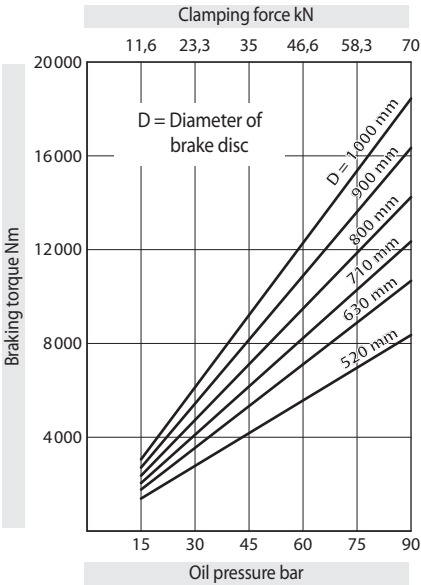

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0.3.

Oil pressure: min. 5 bar
max. 90 bar

Oil volume: max. 298 cm³



Weight: 30 kg

Other features

- The thickness of the customer connecting part results from the thickness of the brake disc W plus 3 mm


Brake Caliper HW 100 HFA

hydraulically activated – spring released

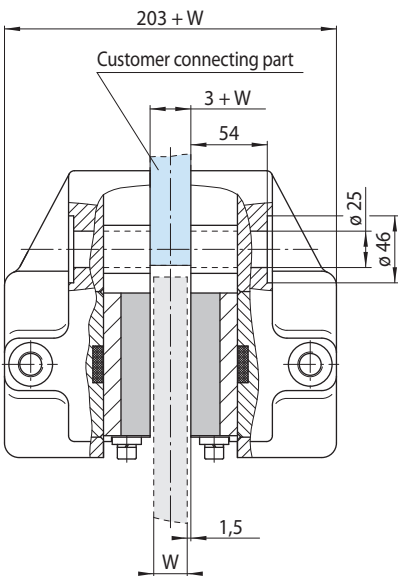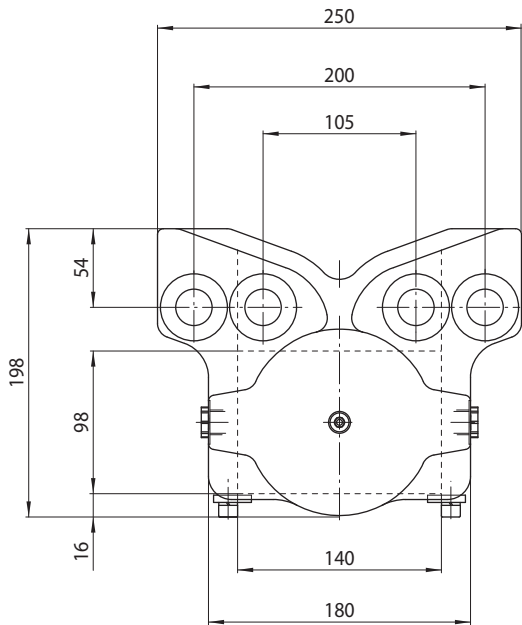


173-1

Mounting

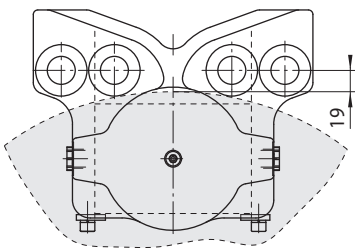


Mounting of the brake disc

173-2

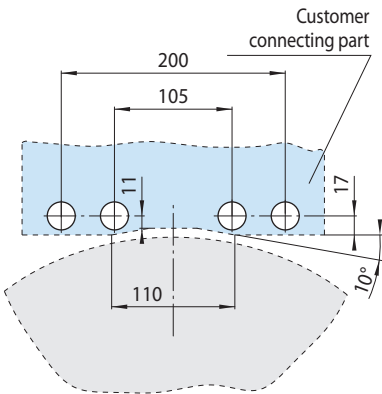

Dimensions of customer connecting part

173-3

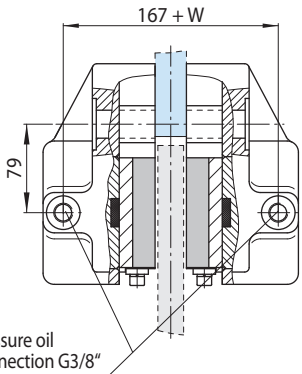


Supply connections

173-4

Brake Caliper HS 120 HFK

hydraulically activated – spring released
for wind turbines or conveyor systems

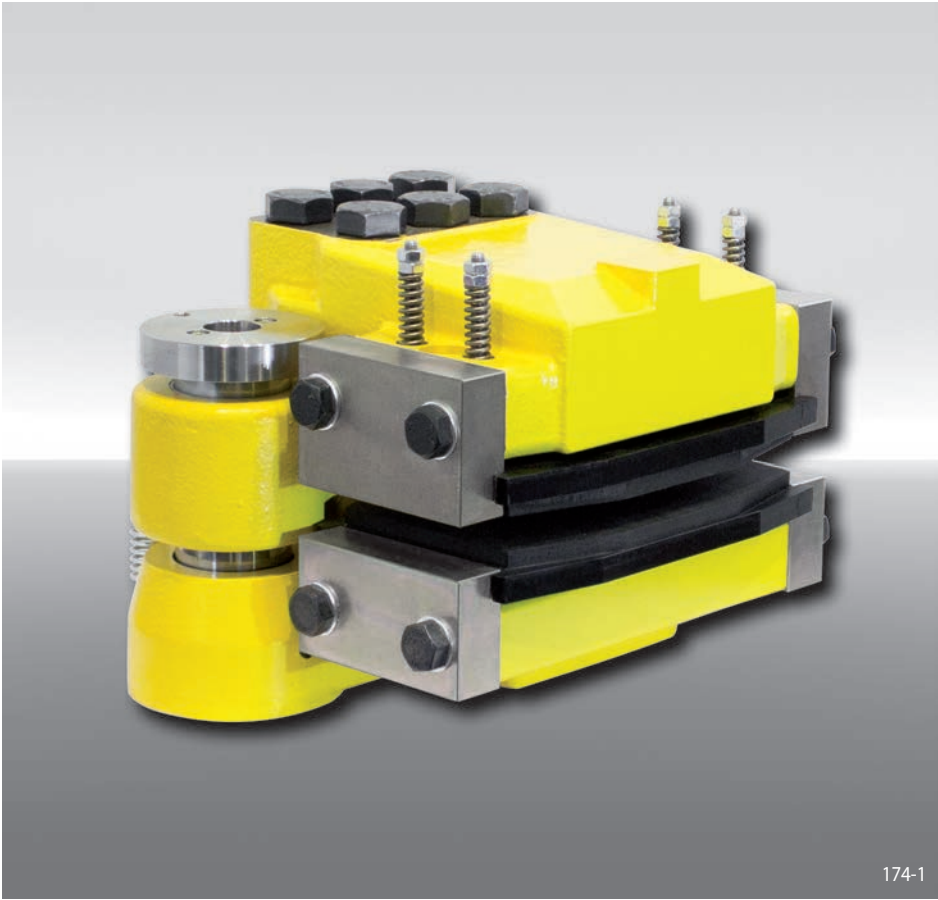


Features	Code
Brake Caliper	H
Floating caliper	S
With piston diameter 120 mm	120
Hydraulically activated	H
Spring released	F
No adjustment to accommodate friction block wear	K
Max. clamping force 130 kN	130

Example for ordering

Brake Caliper HS 120 HFK,
max. clamping force 130 kN:

HS 120 HFK - 130

Technical Data

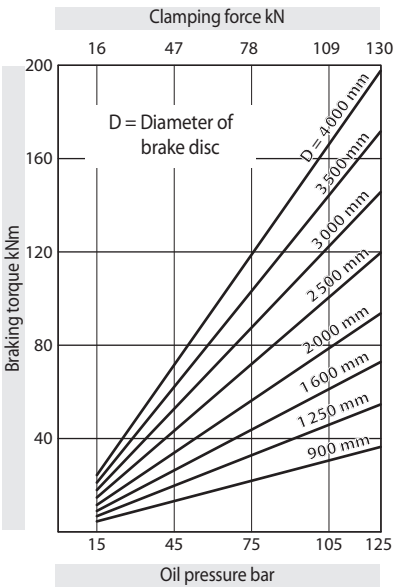

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

- Oil pressure: min. 15 bar
max. 125 bar
- Oil volume: max. 203 cm³
- Weight: ca. 195 kg

Other features

- High safety against leakage
- Easy change of friction blocks
- Painted with surface coating class C4-L according to ISO 12944
- For brake disc thickness W = 20 mm; brake disc thicknesses of up to 40 mm can be achieved with the use of a spacer installed by the customer


Accessories

- Inductive proximity switch for “brake released” operating status
- Inductive proximity switch for brake pad wear control
- Optional painting with surface coating class C4-H or C5M-H (offshore) according to ISO 12944




Brake Caliper HS 120 HFK



hydraulically activated – spring released
for wind turbines or conveyor systems

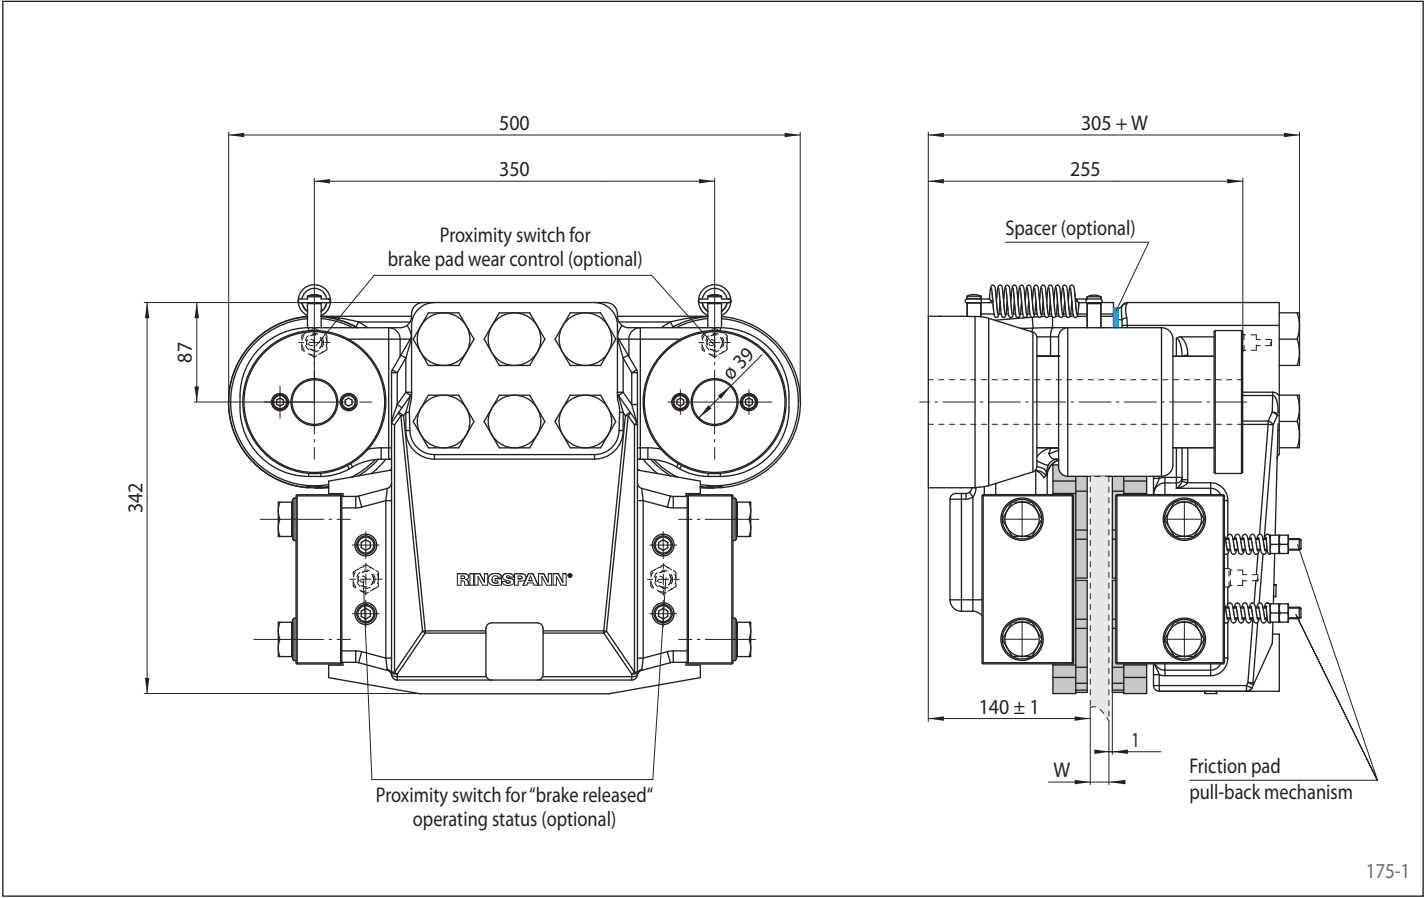


Mounting

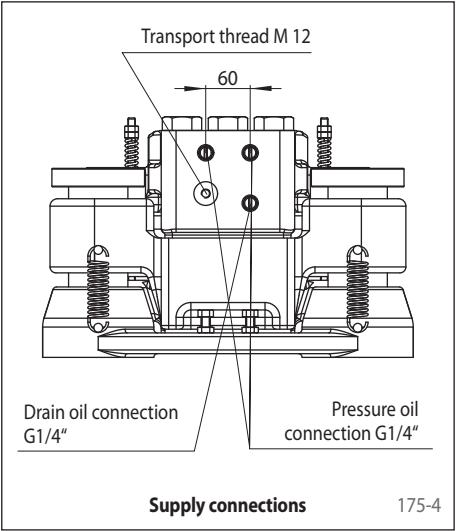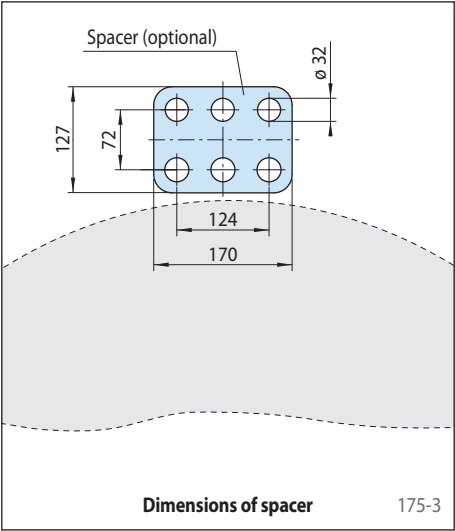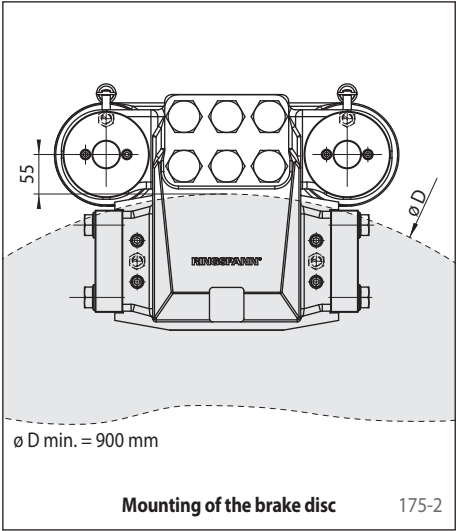

Brake Caliper HW 120 HFK

hydraulically activated – spring released

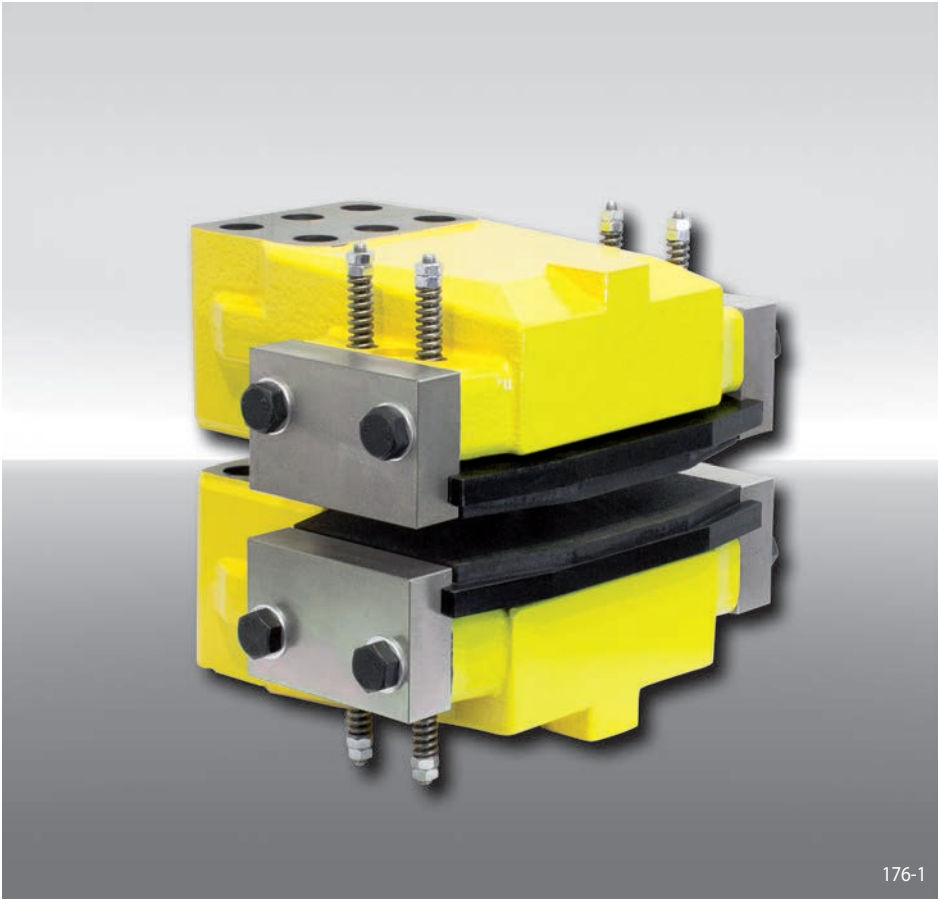


Features	Code
Brake Caliper	H
Standard	W
With piston diameter 120 mm	120
Hydraulically activated	H
Spring released	F
No adjustment to accommodate friction block wear	K
Max. clamping force 130 kN	130

Example for ordering

Brake Caliper HW 120 HFK,
max. clamping force 130 kN:

HW 120 HFK - 130

Technical Data

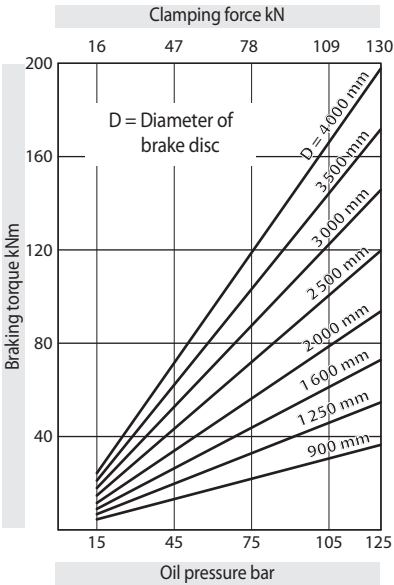

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

- Oil pressure: min. 15 bar
max. 125 bar
- Oil volume: max. 214 cm³
- Weight: ca. 146 kg

Other features

- High safety against leakage
- Easy change of friction blocks
- Painted with surface coating class C4-L according to ISO 12944
- The thickness of the customer connecting part results from the thickness of the brake disc W plus 3 mm


Accessories

- Inductive proximity switch for "brake released" operating status
- Optional painting with surface coating class C4-H or C5M-H (offshore) according to ISO 12944




Brake Caliper HW 120 HFK

RINGSPANN®

hydraulically activated – spring released

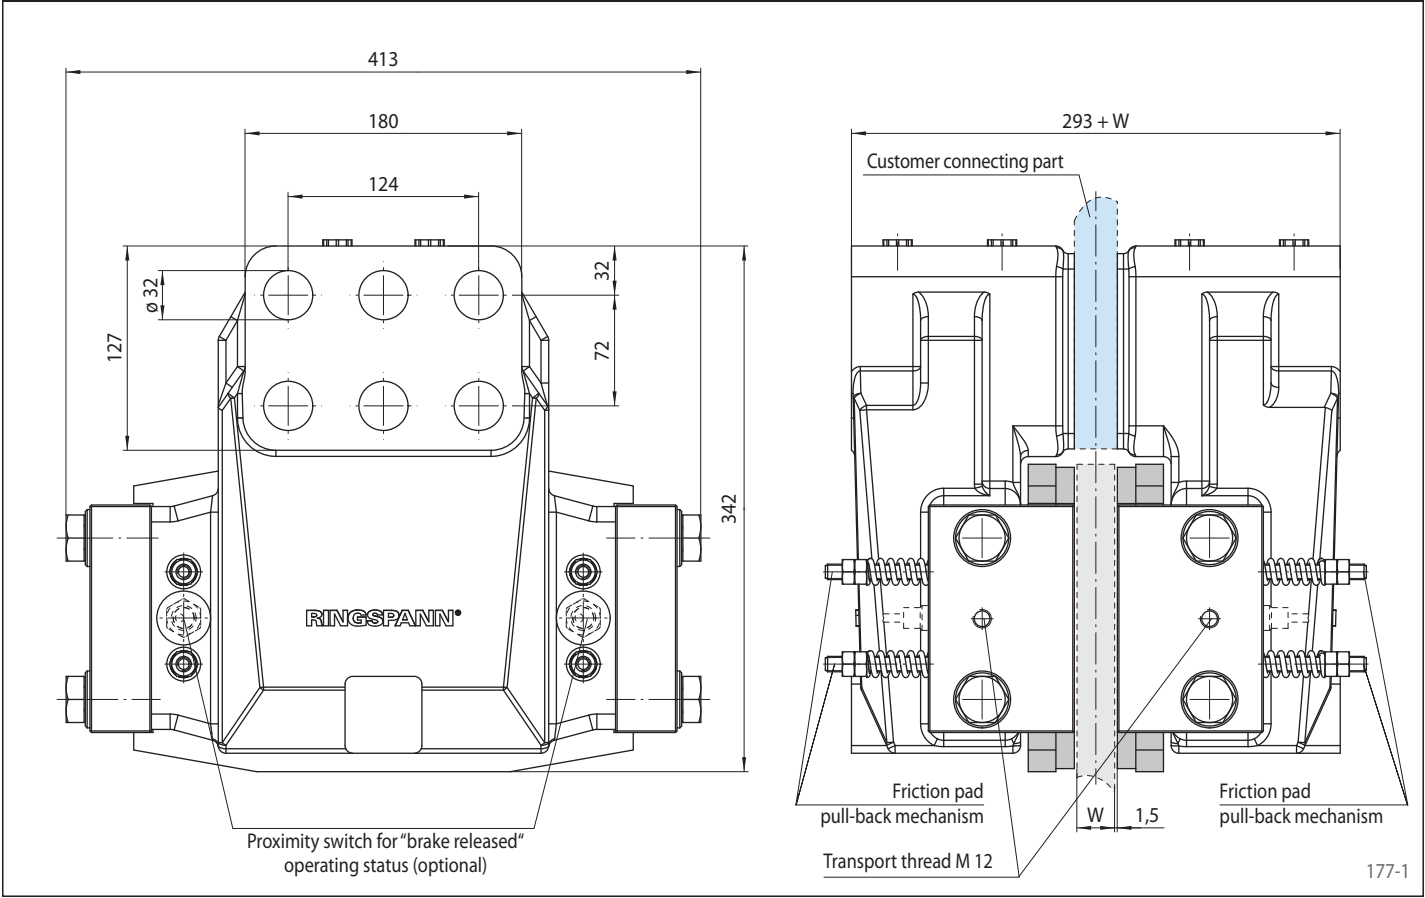


Mounting

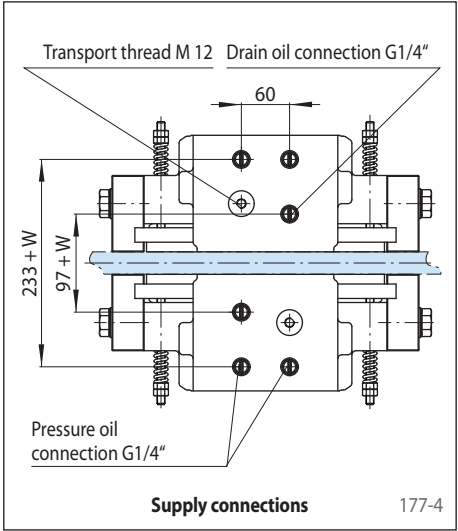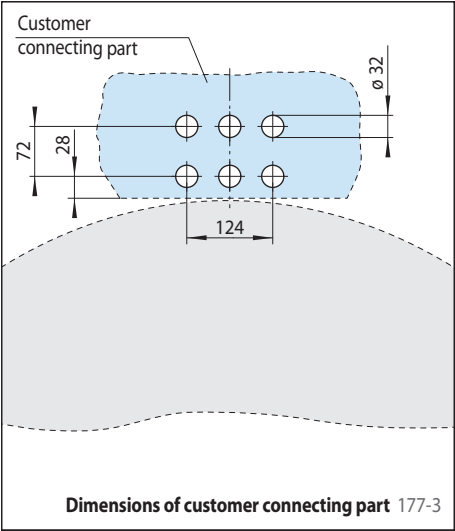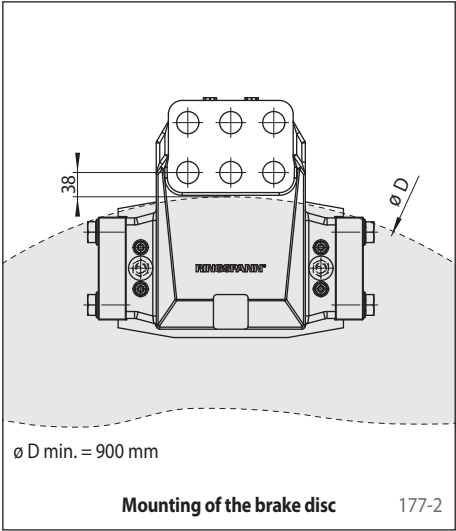

Brake Caliper HW 180 HFA

hydraulically activated – spring released

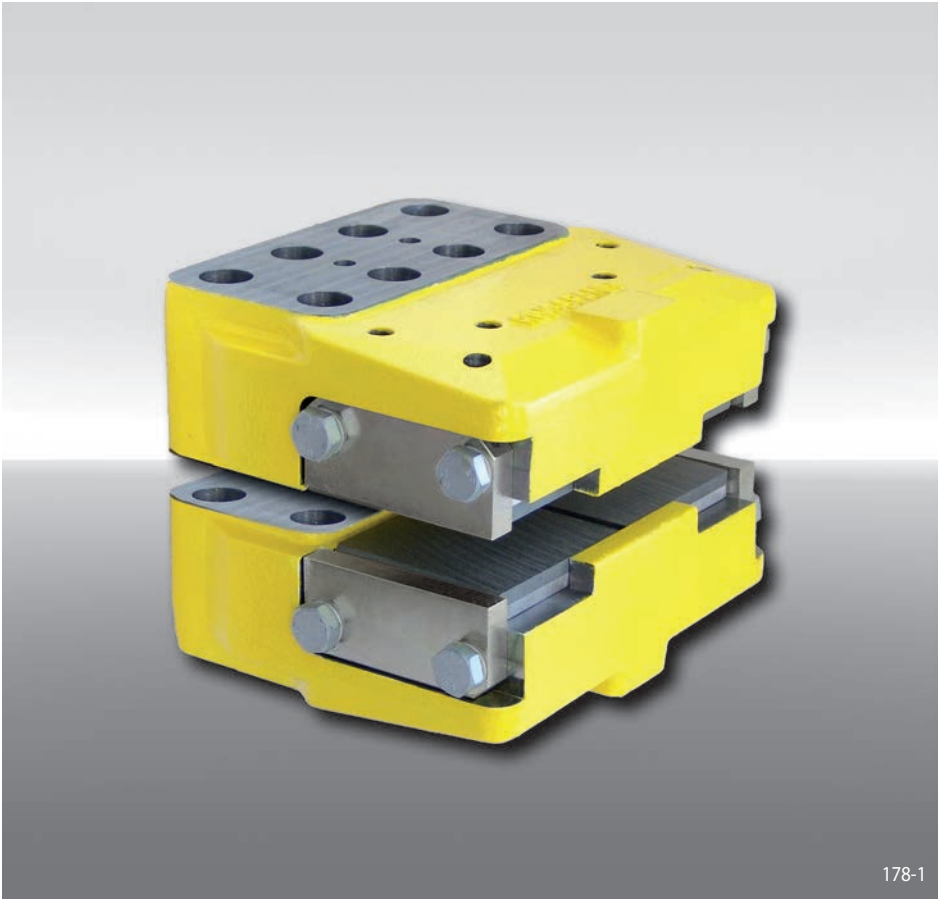


Features	Code
Brake Caliper	H
Standard	W
With piston diameter 2 x 90 mm	180
Hydraulically activated	H
Spring released	F
Automatic adjustment to accommodate friction block wear	A
Max. clamping force 200 kN	200

Example for ordering

Brake Caliper HW 180 HFA,
max. clamping force 200 kN:

HW 180 HFA - 200

Technical Data

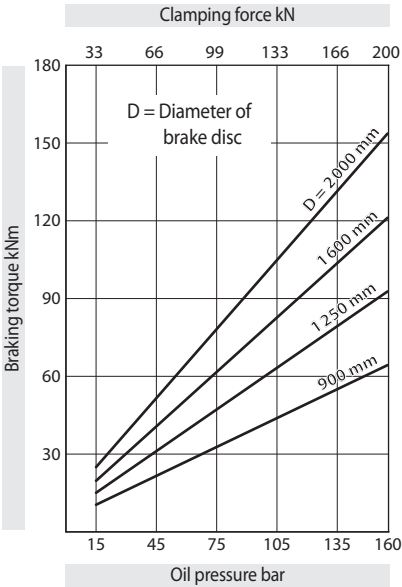

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

- Oil pressure: min. 15 bar
max. 160 bar
- Oil volume: max. 190 cm³
- Weight: ca. 65 kg

Other features


- High safety against leakage
- Painted with surface coating class C4-L according to ISO 12944
- The thickness of the customer connecting part results from the thickness of the brake disc W

Accessories




- Optional painting with surface coating class C4-H or C5M-H (offshore) according to ISO 12944

Brake Caliper HW 180 HFA

hydraulically activated – spring released

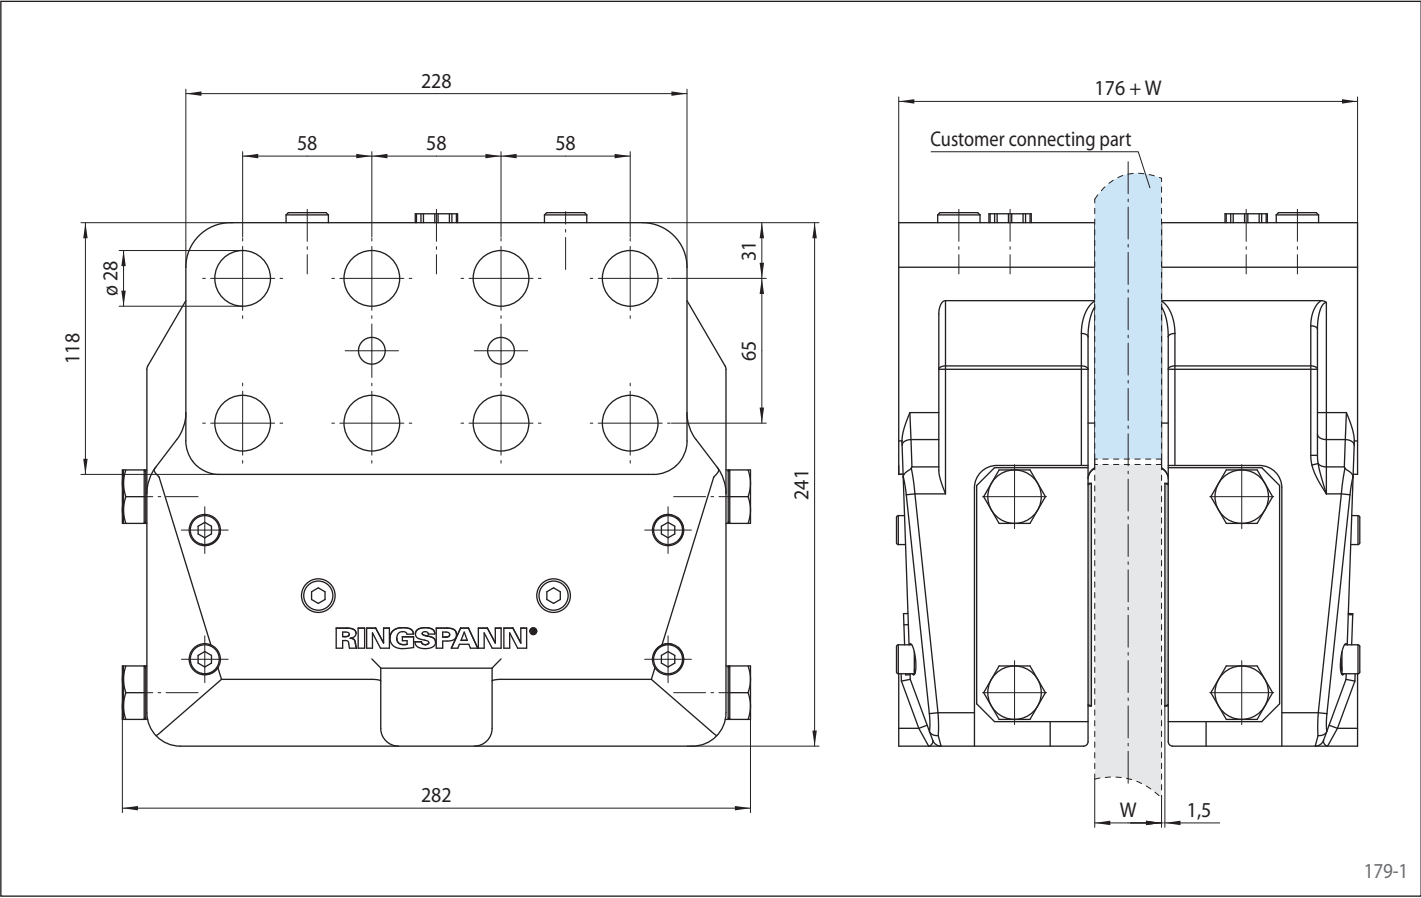

Mounting

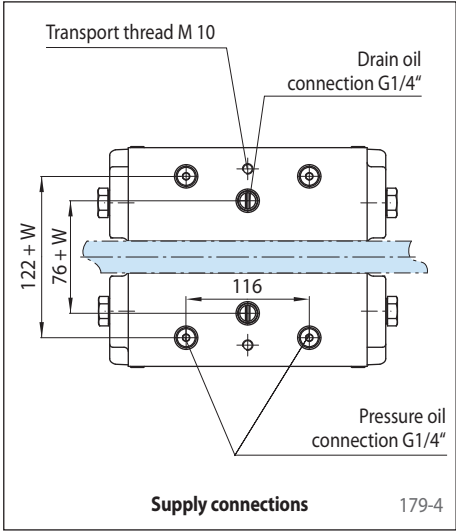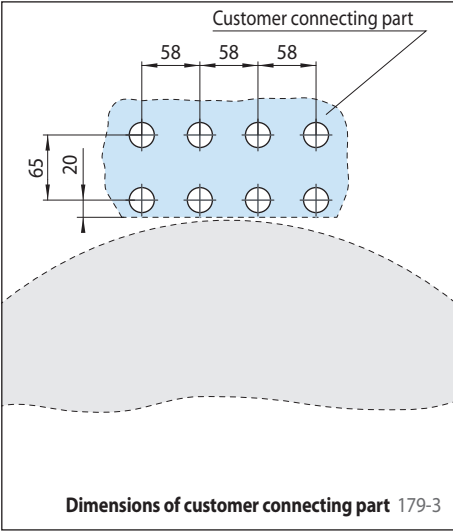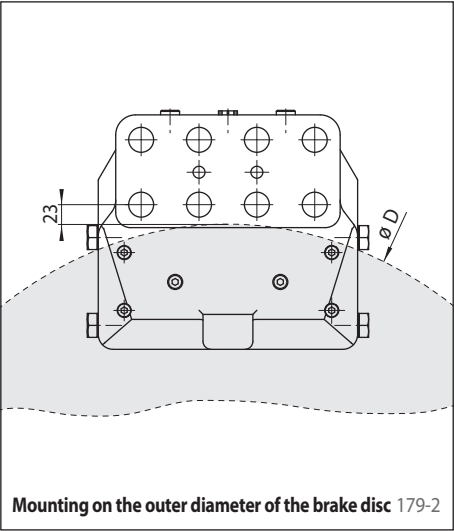



Features

Brake Disc

Code

B

Form

F

B

S

Size of Brake Discs
according to table

0125
to
1000

Thickness of brake disc (Standard)

12
25

Bore diameter
according to table

014
to
220

Form pre drilled,
finished bore without keyway,
finished bore with keyway

V

F

B

Example for ordering

Brake Disc BF with a size of Brake Disc 200 mm, thickness of brake disc 12,5 mm and bore diameter 40 mm in Form F:

BF 0200/12 - 040 F


Technical Data

Size	Thickness of brake disc	Max. speed	Form F Inertia moment	Form B Inertia moment	Form S*		
D mm	W mm	$n_{\max.}$ min^{-1}	J kgm^2	J kgm^2	Clamping diameter d mm	J kgm^2	Max. braking torque $M_{\max.}$ Nm
125	12,5	14500	0,0022	0,0023	-	-	-
150	12,5	12100	0,0045	0,0047	-	-	-
200	12,5	9100	0,0141	0,0146	-	-	-
250	12,5	7300	0,0345	0,0380	-	-	-
300	12,5	6000	0,0720	0,0800	80	0,078	950
355	12,5 / 25	5100	0,140 / 0,270	0,162 / 0,243	-	-	-
430	12,5 / 25	4200	0,302 / 0,596	0,352 / 0,638	90	0,305	1500
					140	0,405	3750
					160	0,646	6000
520	12,5 / 25	3500	0,646 / 1,273	0,790 / 1,380	140	0,752	3750
					160	0,990	6000
					200	1,431	9500
630	25	2900	2,780	3,130	-	-	-
710	25	2600	4,490	5,090	-	-	-
800	25	2300	7,240	8,420	-	-	-
900	25	2000	11,59	13,70	-	-	-
1000	25	1800	17,70	21,30	-	-	-

* Only available in thickness of brake disc W = 12,5 mm

Features

- Optimized for use with RINGSPANN Brakes
- Cast material for best heat absorption
- Ready to install versions are available
- Variants with finished bore, keyway or shrink disc
- Disc diameter ranging from 125 mm to 1000 mm
- The Brake Disc are made from EN 1563 EN-GJS500-7 (GGG-50 after DIN 1693)
- Other sizes of Brake Discs are available on request

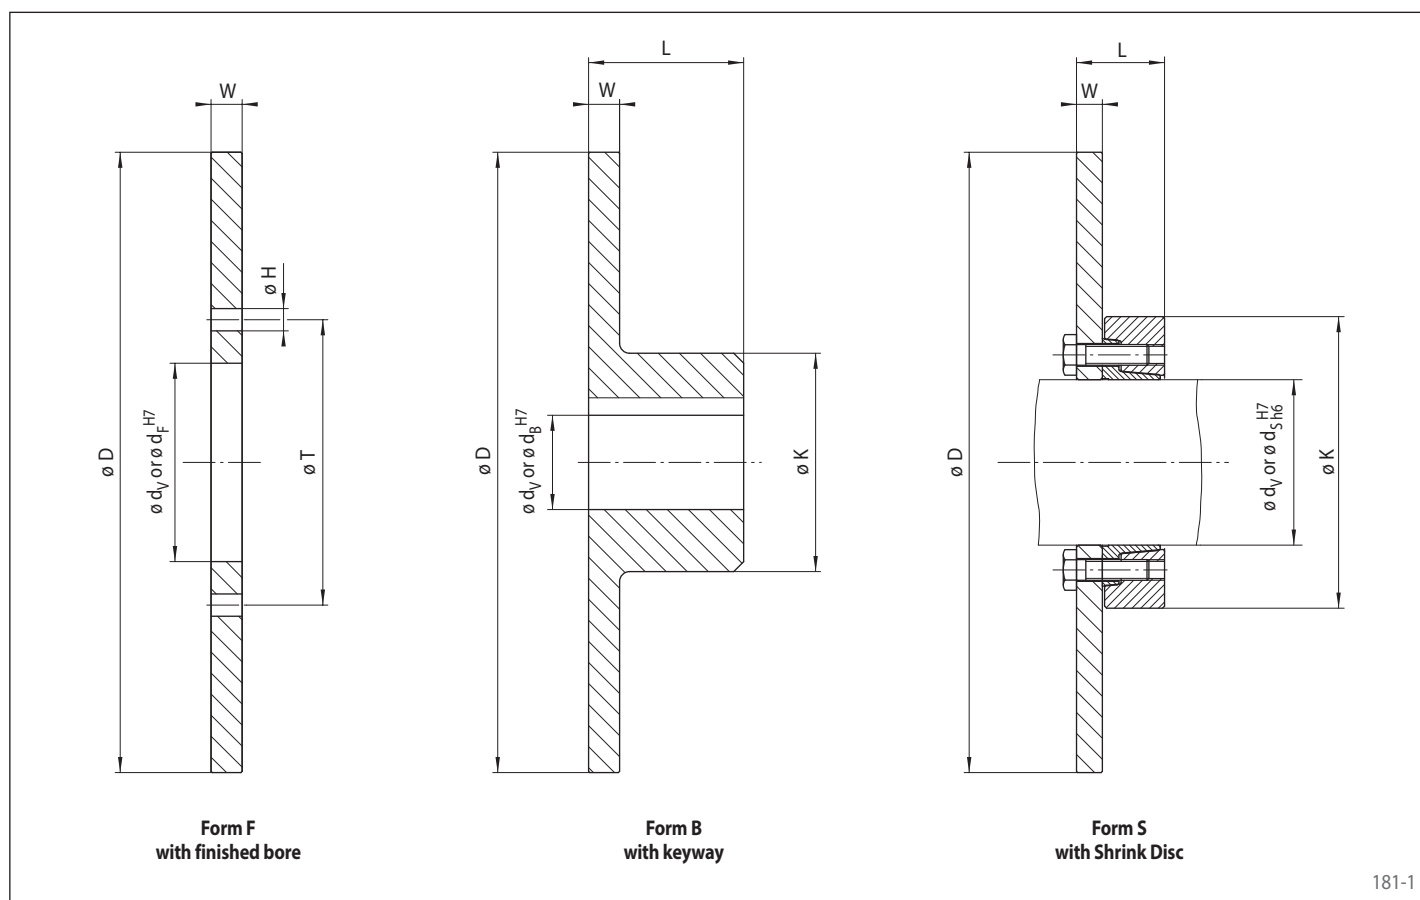

Dimensions

Size	Thickness of brake disc	Pre drilled	Form F				Form B			Form S		
D mm	W mm	d _V mm	Finished bore d _F mm	H mm	T mm	Z*	Max. finished bore d _B ** mm	L mm	K mm	Clamping diameter d _S mm	L*** mm	K mm
125	12,5	-	40	9	56	4	32	37,5	50	-	-	-
150	12,5	-	50	9	66	4	40	42,5	60	-	-	-
200	12,5	-	63	11	83	8	45	52,5	65	-	-	-
250	12,5	-	80	11	100	8	70	62,5	100	-	-	-
300	12,5	-	100	14	122	8	80	72,5	120	80	46,5	141
355	12,5 / 25	-	110	14	132	10	100	82,5	145	-	-	-
430	12,5 / 25	50	125	14	147	12	115	97,5	170	90	52,5	155
										140	74,5	230
										160	84,5	290
										140	74,5	230
520	12,5 / 25	50	160	14	182	16	140	117,5	210	160	84,5	290
										200	101,5	340
										-	-	-
630	25	75	-	-	-	-	155	150	250	-	-	-
710	25	95	-	-	-	-	180	165	280	-	-	-
800	25	95	-	-	-	-	200	185	320	-	-	-
900	25	120	-	-	-	-	210	205	360	-	-	-
1000	25	120	-	-	-	-	220	225	400	-	-	-

* Z = Number of holes øH pitch circle øT • ** Keyway according to DIN 6885, page 1 • *** At unclamped state

Brake Discs Form S

The following apply to the shaft:


- Yield strength $R_e \geq 360 \text{ N/mm}^2$
- E-module ca. 206 kN/mm^2

Surfaces

Average surface roughness at the contact surfaces of the shaft $R_a \leq 3,2 \mu\text{m}$.


Dimensioning

Please refer to the technical points on page 183 when dimensioning the brake disc size.

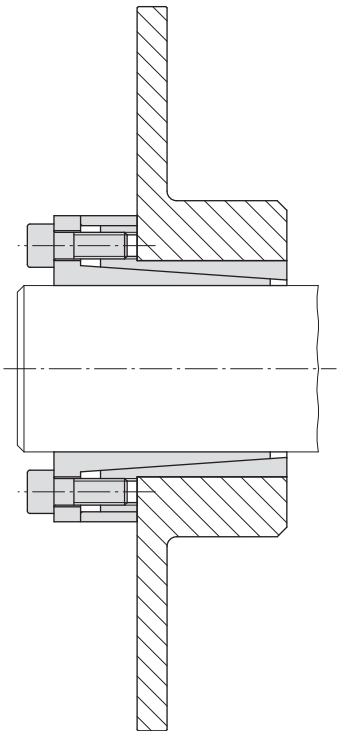

Cone Clamping Element RLK 110
with Brake Disc Form B

182-1

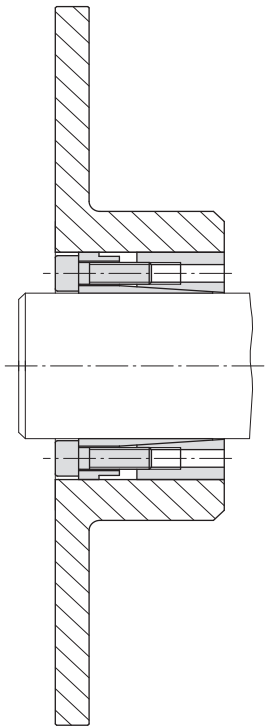

Cone Clamping Element RLK 130
with Brake Disc Form B

182-2

Brake Discs

Verification of Heat Absorption

Permissible Braking Action with Single Braking Operation

Extreme braking processes should be checked to ensure that the brake disc will not reach 300° C when absorbing the braking energy. The braking time in this case should not exceed 10 seconds.

As an example, you can see in the table the braking energy a brake disc can absorb together with a brake size 020/025/030 without exceeding 300° C. We recommend that this additional calculation be carried out in the case of indexing operations. The absorbed energy

for the deceleration of rotating masses in this case is:

W_B = (J_red * (n_1^2 - n_2^2)) / 182,5

Ensure that:

W_BSzul ≥ W_B

The table is valid for brake disc material GJS-500, brake sizes 020/025/030 with standard friction pads, a maximum brake disc temperature of 300° C and ambient temperature of 20° C.

D mm	W _{BSzul} W = 12,5 mm Nm	W _{BSzul} W = 25 mm Nm
125	120 000	-
150	170 000	-
200	260 000	-
250	350 000	-
300	450 000	-
355	550 000	1 090 000
430	690 000	1 370 000
520	850 000	1 700 000
630	-	2 110 000
710	-	2 410 000
800	-	2 740 000
900	-	3 110 000
1 000	-	3 480 000

Verification of Heat Dissipation

The transmissible brake power of the disc according to the diagram on this page applies to the types of braking operation described below:

P_BSzul ≥ P_B


Braking with low frequency z ≤ 40 per hour

If „z“ actuations occur within one hour, then the brake power capacity required is as follows:

P_B = (M_B * (n_1 - n_2)) / (6,88 * 10^7) * z * t_B

Braking with high frequency z > 40 per hour

For such cases we would ask you to enclose with your enquiry exact details of the time slope of speed and braking torque, as well as the completed questionnaire on page 198. We will check the design of the brake disc in respect of the heat dissipation.

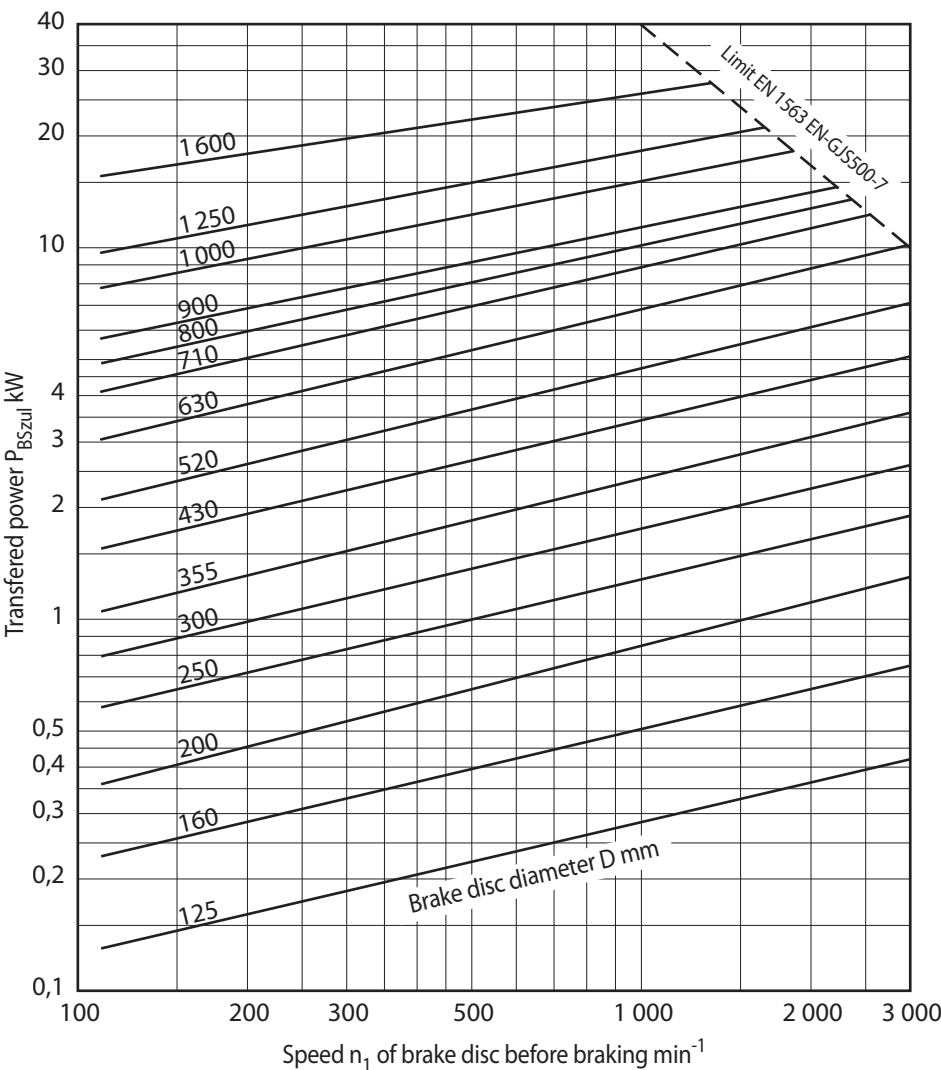

Formula symbols

- J_{red} [kg m²] Reduced inertia moment
- M_B [Nm] Required braking torque
- n₁ [min⁻¹] Speed before braking
- n₂ [min⁻¹] Speed after braking
- P_B [kW] Brake power generated by application, average with one braking cycle
- P_{BSzul} [kW] Brake power capacity of brake
- t_B [s] Braking time
- W [mm] Thickness of brake disc
- W_B [Nm] Braking energy generated by application
- W_{BSzul} [Nm] Braking energy capacity of the disc brake
- z [h⁻¹] Number of braking cycles per hour

The transferred power is based on a maximum disc temperature of 300° C applicable to thickness of brake disc of up to 25 mm and an ambient temperature of 20° C.

RCS® Pull Cable and RCS® Hand Brake Lever

RCS® Pull Cable


RCS® Pull Cable for Brake Calipers DV 020 FKM and DH 020 FKM as well as DV 020 MKM and DH 020 MKM are available in variable cable lengths.

Cable ends are designed for attachment to Brake Calipers or RCS® Hand Brake Lever B 50452.

Features

- Slide ease
- Stainless steel inner member wrap
- Suitable for small bending radii
- Galvanized steel elements
- Stainless steel drawbar

An extensive product range of RCS® Remote Control Systems can be found in the "RCS® Remote Control Systems" catalogue.

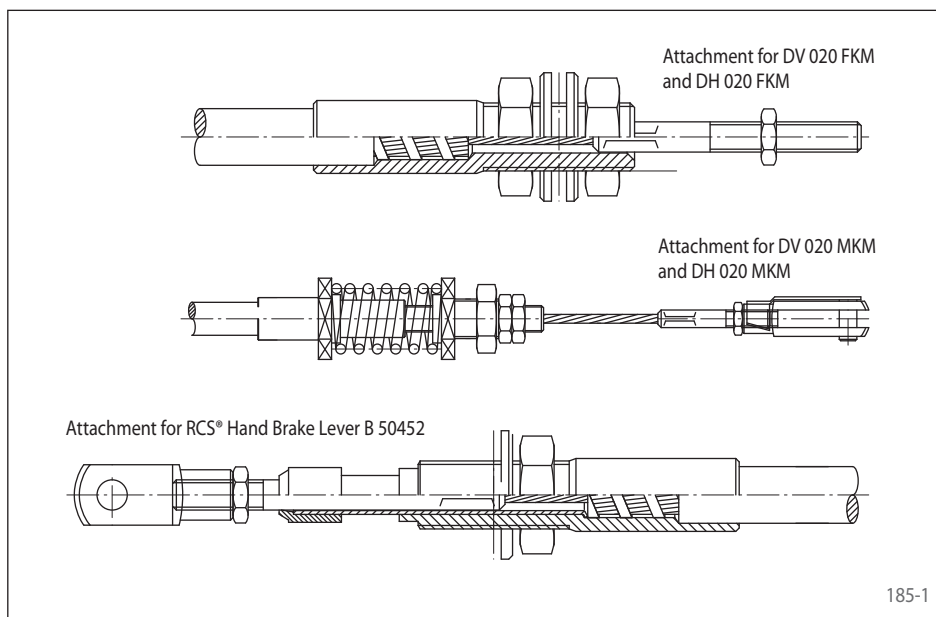

RCS® Hand Brake Lever B 50452


The RCS® Hand Brake Lever B 50452 is used to operate Brake Calipers DV 020 FKM and DH 020 FKM as well as DV 020 MKM and DH 020 MKM in connection with a RCS® Cable.

Article Number: 4561-000001-R50452

Features

- Two positions: "open" or "closed"
- Over center locking
- Friction Block Wear compensation
- Attachment for RCS® Pull Cables
- Optional with electric switch (Closer or Opener) available

An extensive product range of RCS® Remote Control Systems can be found in the "RCS® Remote Control Systems" catalogue.

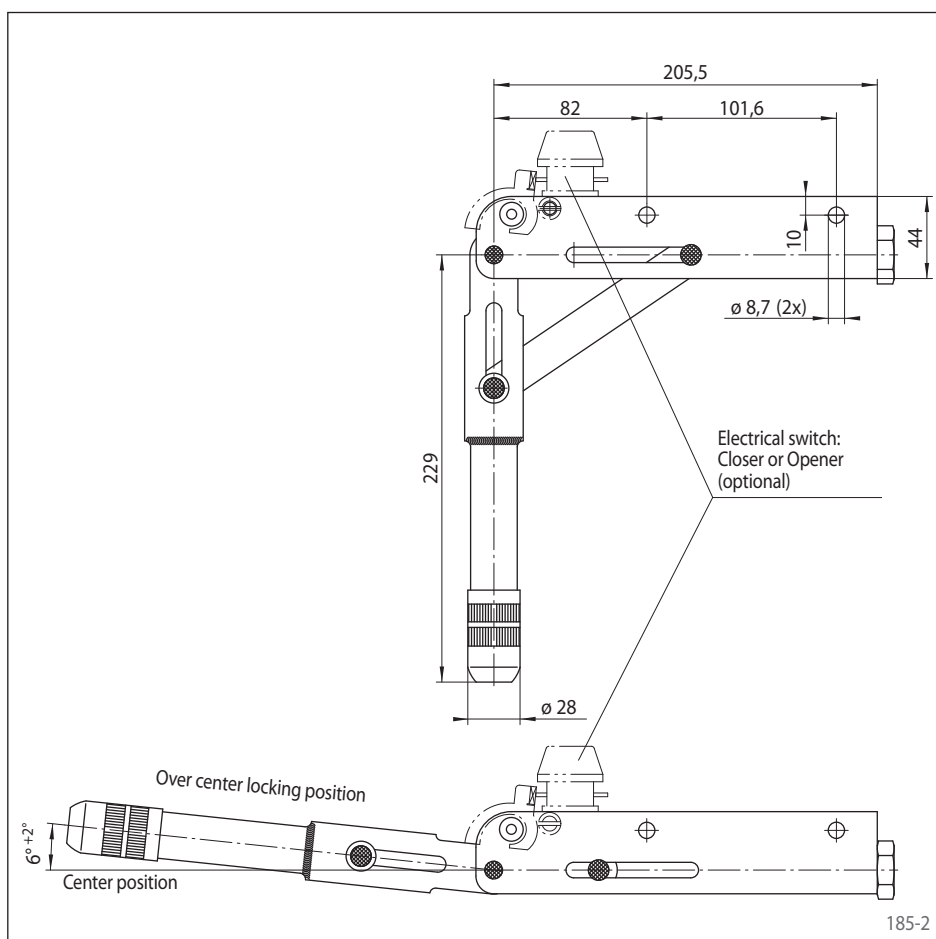

Control System BCS 600

For controlled braking ...

- with pre-set braking distance
- with pre-set deceleration
- with pre-set braking time

**We command
braking actions**



Belt conveyors in mining industry



For controlled braking ...

- with pre-set braking distance

Industrial Application

Brakes are used to stop declining conveyor belts in the mining industry. The brakes should prevent the belt from overshooting or rotating in the reverse direction. The load is not known at the time of braking and consequently the necessary braking torque is unknown.

Brake system requirements

The required braking force transferred onto the belt depends on

- the pre-set braking distance,
- the current load condition,
- the current environmental conditions
- and fluctuations in friction coefficient between pad and disc caused by temperature variations during braking.

Elevator car drive for underground mining


Industrial Application

The deceleration of elevator cars has to comply with certain regulations. Oscillations in longitudinal direction should be avoided. The load at the time of braking is unknown and could lead to peak loads in the ropes as well as rope slipping on the drum.

Brake system requirements

The required braking force transferred onto the ropes depends on

- the permissible deceleration,
- load variations,
- the current environmental conditions
- and fluctuations by temperature variations during braking.

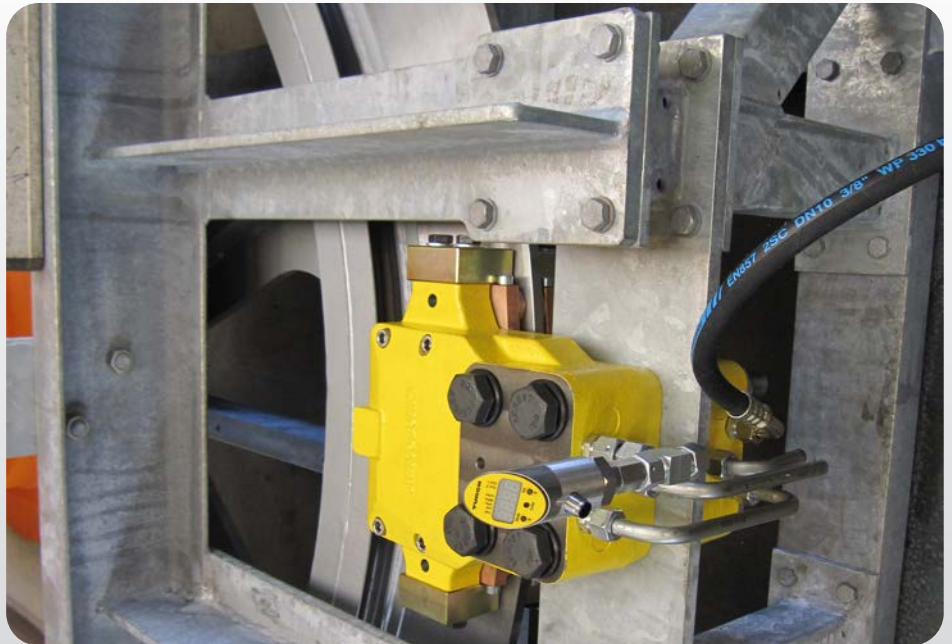

Source: Josef Wiegand GmbH & Co. KG

For controlled braking ...

- with pre-set deceleration

Escalators and moving walkways



Industrial Application

On escalators and moving walkways injuries can occur by stopping too quickly. Regulations prescribe a braking time of 2 - 3 seconds. The number of passengers on the escalator is not known at the time of braking and consequently the necessary braking torque is unknown.

Brake system requirements

The required braking force transferred onto the escalator depends on

- the pre-set braking time,
- the admissible deceleration for passenger transport,
- load variations,
- the current environmental conditions
- and fluctuations by temperature variations during braking.

For controlled braking ...

- with pre-set braking time

Short description

The Control System BCS 600 is a brake control system for hydraulically released or hydraulically activated brakes, based on adjustable hydraulic pressure.


Herewith, demanding braking actions (preset braking time, deceleration and braking distance) are performed reliably. At the same time the BCS 600 accomplishes important safety and monitoring functions. It consists of a control unit and a hydraulic power pack used in conjunction with brakes from the RINGSPANN product range.




Control braking actions

The standstill of the system will be reached independent of general conditions with, consistent braking either by


a pre-set braking distance

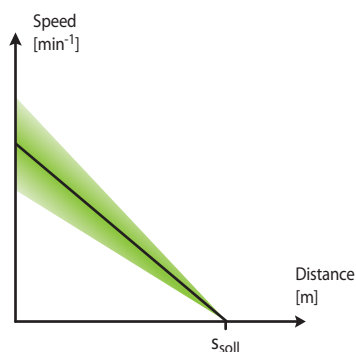


a pre-set deceleration



a pre-set braking time

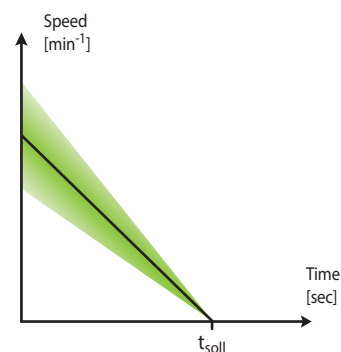

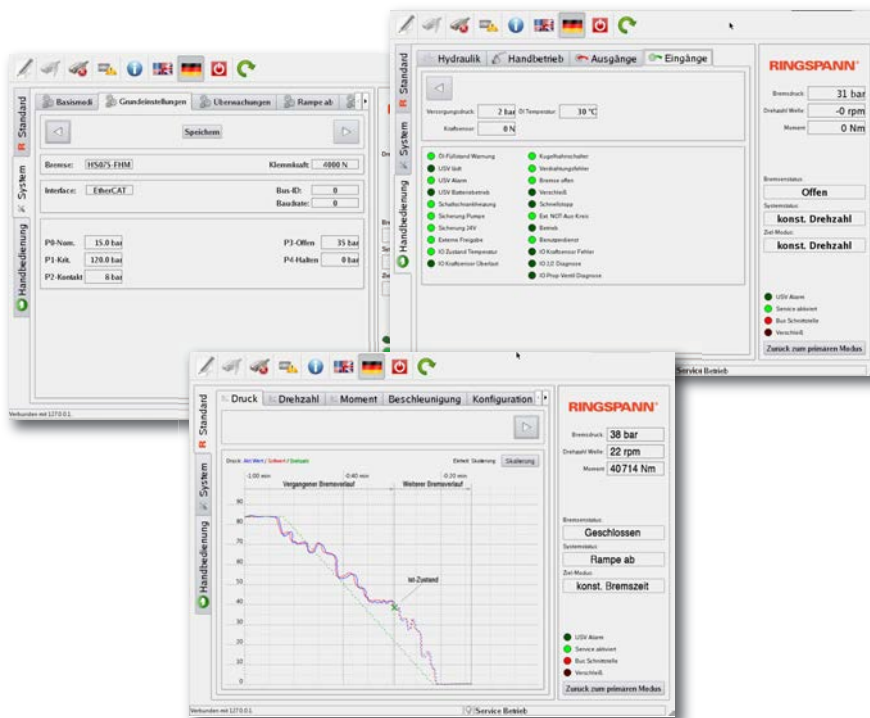

Touchpanel as graphical user interface

Features

- Fast reduction of the gap between disc and brake pad
- Continuous monitoring of rotational speed, hydraulic pressure, oil temperature and rotational direction
- Operation as a stand alone braking system is possible
- Periodically light braking to clean the brake disc
- Graphical visualization of the braking process in real time
- Redundant installation of a second braking system is possible (one supports the other if necessary)
- Retrofit or upgrade of outdated braking systems is possible
- Permanent logging of operating data and system events
- Spring pressure monitoring



Controller IPC

Technical specifications

- Large tank volume
- System pressure: up to 200 bar
- Supply voltage: 110 VAC-50/60 Hz, 230 VAC-50/60 Hz, 400 VAC-50/60 Hz
- Various sensors
- Ambient temperature (standard): -20° C ... +40° C
- Fieldbus interface:



Hydraulic powerpack

Options

- Hydraulic Accumulator
- Uninterruptible power supply (UPS)
- Remote maintenance via internet or UMTS
- Touch-Panel for data input and brake process visualization, directly on the Brake Control System
- "Cold Climate Version" (-40° C)
- Monitoring of brake pad wear



Hydraulic Power Unit

- Compact design because of the cylindrical dimensions of the tank
- Optimized oil-connection of pressure side provided by two connection arranged at 90°
- Easy mounting because of two mounting possibilities; therefore, no complex mounting frames are required
- Inside and outside of the tank is oil-resistant powder-coated

Hydraulic Power Units can be made according to customers demand. Please fill out the "Questionnaire for selecting Brake Calipers" on page 198.



Pneumatic cabinet

Suitable for brakes up to size 035, configuration according to customers demand.

Pneumatic components include:

- Compressor with 5 liter pressure storage for an output range of 0,5 to 6,0 bar
- Filter regulator unit, including condensate separator
- Valve
- Electric power unit 230 V AC

Cabinet size W x H x D - 400 x 500 x 210 mm

Pneumatic Cabinets can be made according to customers demand. Please fill out the "Questionnaire for selecting Brake Calipers" on page 198.

Handwriting practice area with 20 horizontal lines.

Graph paper area with a grid of 20 columns and 20 rows.

Clamping Unit KE ... FHK

spring activated – hydraulically released



Features	Code
Clamping Unit	K
Standard	E
Sizes 32, 37, 42, 47, 57, 70, 90, 105, 140 or 160 are available	032 to 160
Spring activated	F
Hydraulically released	H
No wear adjustment	K
For piston rod diameter from 12 mm to 115 mm	012 to 115

Example for ordering

Clamping Unit KE 037 FHK with piston rod diameter 16 mm:

KE 037 FHK - 016

Description

The Clamping Unit KE ... FHK clamps and holds hydraulic cylinder drawbars with a calculated clamping force in both directions of movement.

The clamping force is generated via built-in disc springs. The Clamping Unit is released by hydraulic pressure.

The units are fitted to cylinders and other machine parts with a connecting flange by the customer.

Operation

During the working stroke of the hydraulic cylinder, pressure is exerted onto the Clamping Unit. Through this pressure the disc springs are compressed via the piston. In this position, the clamping discs are free of axial tension and thus allow the piston rod to move freely.

When the pressure on the Clamping Unit is removed, the force of the springs work fully onto the piston and therefore also on to the disc pack. The clamping discs translate the axial spring pressure into a radial force applied to the slotted clamping sleeve that is equal to at least five times the axial pressure. The clamping

sleeve transmits the radial clamping forces to the piston rod, thereby holding the piston rod firmly in place.

Each time the pressure falls – even when this was not planned – the Clamping Unit will respond immediately.

Application

The Clamping Unit secures the piston rod with precision against unintentional axial movements.
For example, on machines with cylinders or linear motors a certain position can be driven in one continuous movement. With the Clamping Unit this position can then be held mechanically with accuracy.
The accuracy of the safety Clamping Unit is independent of the size and the direction of the force on the piston rod up to the maximum

holding force indicated. No movement of the piston rod is required for the holding force to become effective; the clamping force is effective immediately and does not depend on outside forces. If it is necessary to brake the movement of the piston rod, the Clamping Unit would, when pressure falls, produce virtually without delay a constant friction force independent of time. The slowing down of the piston rod is therefore even and protects the decelerated components of the installation.


Features

- For continuous piston rod clamping
- Spring activated, hydraulically released
- Holding forces transmissible in both directions of movement
- No application of force (lifting) to the piston rod required for release

Clamping Unit KE ... FHK

spring activated – hydraulically released

RINGSPANN®

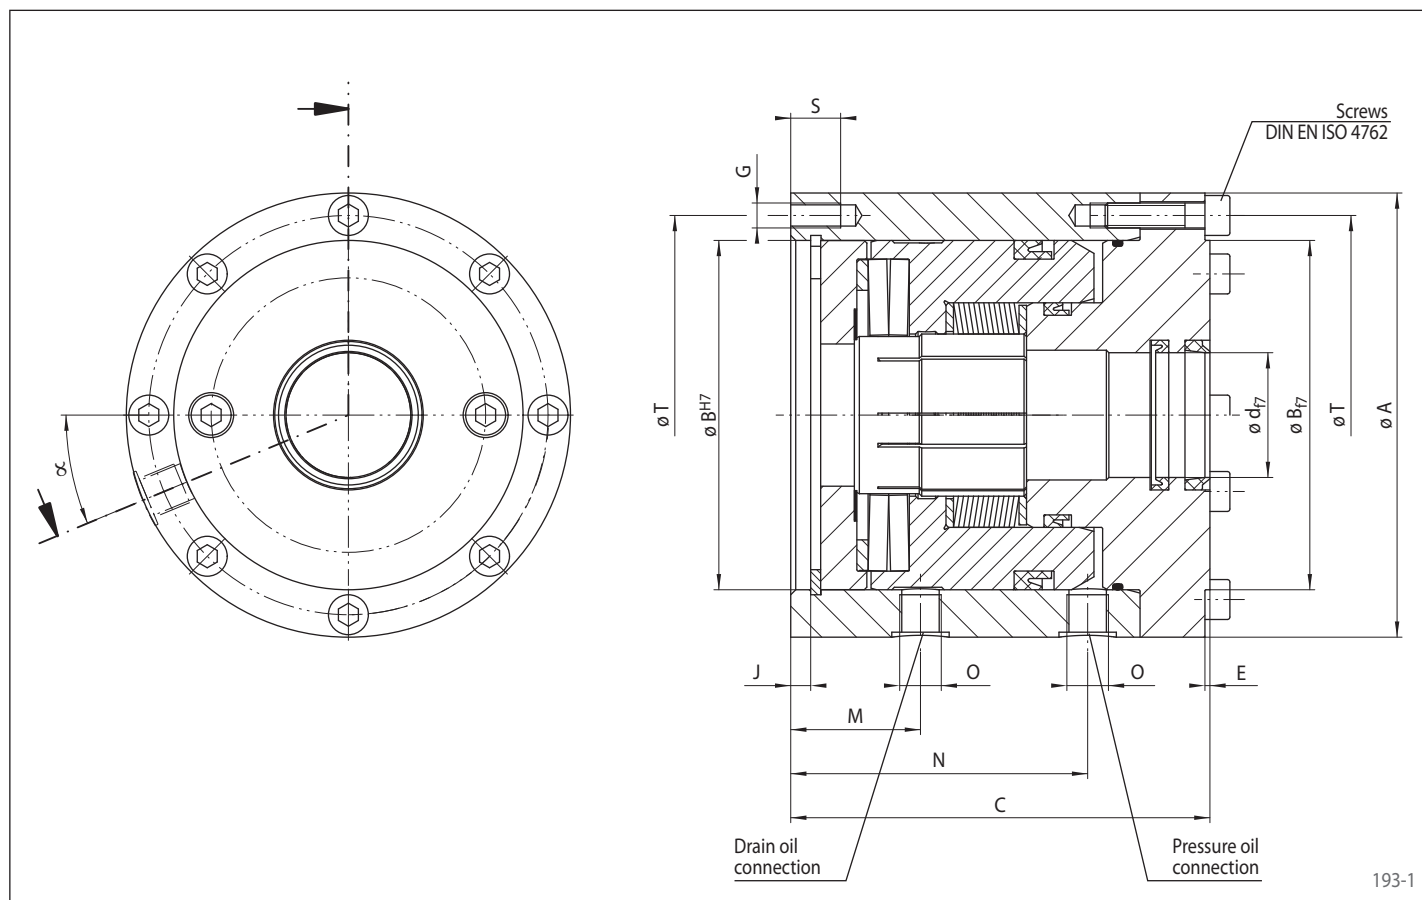

Size	Piston rod- ø d ¹⁾	Holding force F _H ²⁾	A	B	C	E	G	J	M	N	O	S	T	X ³⁾	Necess. release press.	Max. perm. press.	Oil vol. per stroke	α	Weight
	mm	N	mm	mm	mm	mm		mm	mm	mm		mm	mm		bar	bar	cm ³	Degree	kg
32	12	2500	72	48	76	2	M 5	5	26	54	R1/8"	9	60	4	57	120	1	22,5	2,1
37	14 16 18	5000	85	60	88	2	M 6	6	31	64	R1/8"	11	72	4	68	120	2	22,5	3,4
42	20 22	8000	100	68	100	2	M 6	6	34	72	R1/8"	11	85	4	82	120	2	22,5	5,3
47	25 28	12500	110	80	115	2	M 6	7	42	85	R1/8"	15	92	6	84	120	3	22,5	7,3
57	(30) 32 34 36	19000	130	95	130	2	M 8	7	48	96	R1/4"	16	112	6	88	120	5	22,5	11,5
70	40 45 50	30000	150	116	148	3	M 8	4	52	108	R1/4"	16	132	8	102	120	6	22,5	17,2
90	(55) 56 60	48000	178	140	168	3	M 10	8	52	119	R3/8"	20	160	8	108	160	13	22,5	27,2
105	63 70 80	68000	210	168	185	3	M 12	10	60	133	R3/8"	22	190	8	122	160	17	22,5	41,2
140	(85) 80 90	120000	273	220	230	3	M 14	12	75	172	R3/8"	25	250	12	115	160	39	15	86,9
160	100 110 (115)	200000	330	270	270	5	M 18	16	90	200	R3/8"	38	300	12	110	160	64	15	148,2

¹⁾ Diameter printed in bold to be preferred. Diameter line without () corresponds to DIN 24334.


²⁾ Please note recommendations on page 197.

³⁾ Number of tapped holes G or screws DIN EN ISO 4762 on pitch øT.

Clamping Unit KE ... FPK

spring activated – pneumatically released

RINGSPANN®

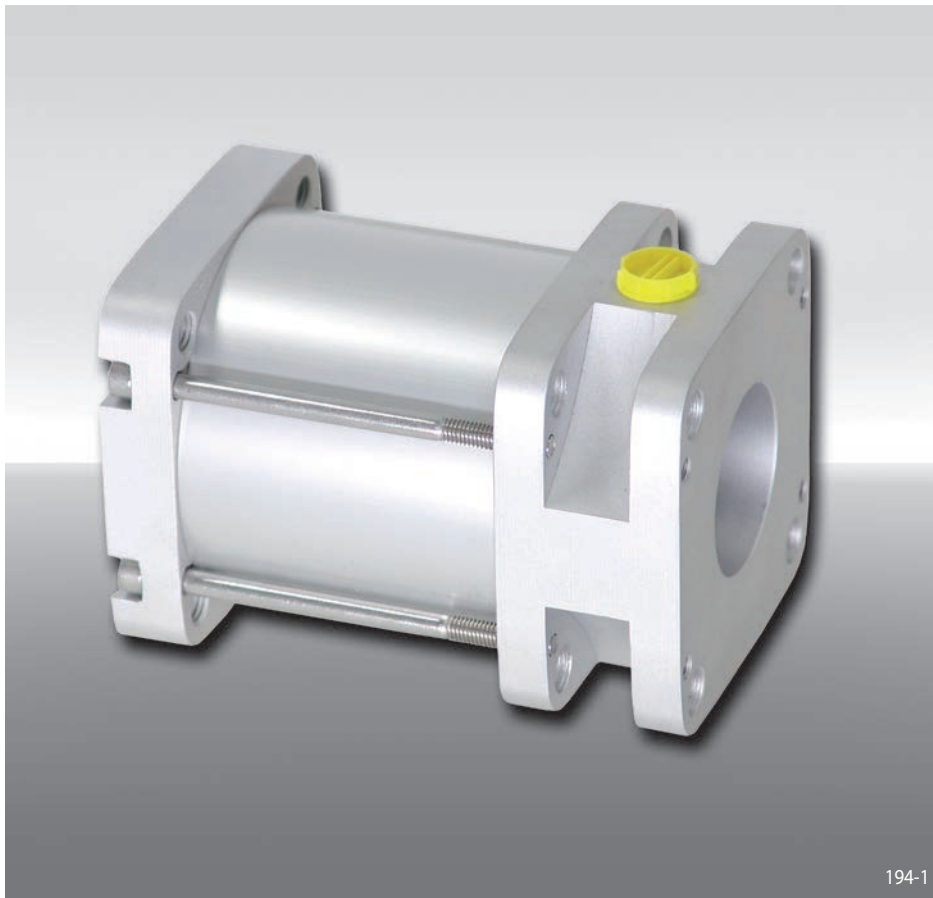

Features

	Code
Clamping Unit	K
Standard	E
Sizes 40, 50, 63, 80 or 100 are available	040 to 100
Spring activated	F
Pneumatically released	P
No wear adjustment	K

Example for ordering

Clamping Unit KE 040 FPK:

KE 040 FPK

Description

The Clamping Unit KE ... FPK clamps and holds pneumatic cylinder piston rods with a calculated clamping force in both directions of movement.

The clamping force is applied by disc springs. Clamping force is released by pneumatic pressure.

The Clamping Units can be bolted directly to any cylinder of the ISO series or attached to other machine components with a connection flange provided by the customer.

Operation

Pneumatic pressure is applied to the Clamping Unit during the working stroke of the pneumatic cylinder. This pressure is transmitted by the piston via the lever spring to the mount and presses the disc springs together. The lever spring translates the pressure into a clamping force. In this position, the clamping discs are free of axial tension and thus allow the piston rod to move freely.

When the pressure on the Clamping Unit is removed, the force of the springs work fully onto the piston and therefore also on to the disc pack. The clamping discs translate the axial spring pressure into a radial force applied to the slotted clamping sleeve that is equal to at least five times the axial pressure. The clamping sleeve transmits the radial clamping forces to the piston rod, thereby holding the piston rod firmly in place.


Each time the pressure falls - even when this was not planned - the Clamping Unit will respond immediately.

Application

The Clamping Unit secures the piston rod with precision against unintentional axial movements.

For example, on machines with cylinders or linear motors a certain position can be driven in one continuous movement. With the Clamping Unit this position can then be held mechanically with accuracy.

The accuracy of the safety Clamping Unit is independent of the size and the direction of the force on the piston rod up to the maximum holding force indicated. No movement of the piston rod is required for the holding force to become effective; the clamping force is effective immediately and does not depend on outside forces.

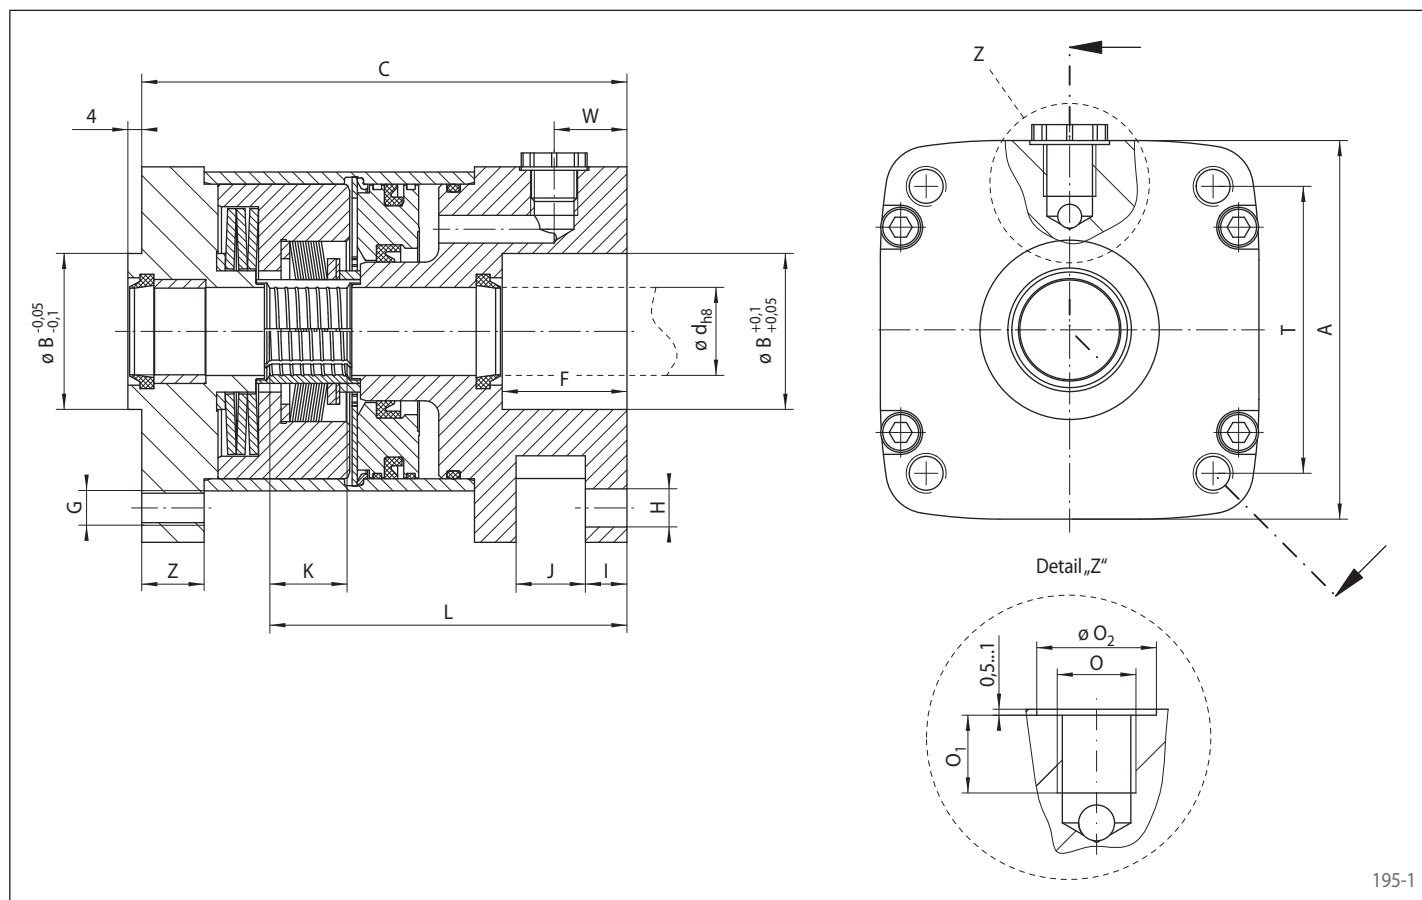

Size	Piston rod- ø d	Holding force $F_H^{1)}$	A	B	C	F	G	H	I	J	O	O ₁	O ₂	T	W	Z	Air vol. per activation	Weight
	mm	N	mm	mm	mm	mm		mm	mm	mm		mm	mm	mm	mm	mm	cm ³	kg
40	16	1 000	70	35	95	24	M6	6,6	6	14	G1/8	10,5	16	38	15,5	13	5,5	1,1
50	20	1 600	75	40	112	30	M8	9	8	16	G1/4	12,5	20	46,5	22,9	13	13,5	1,5
63	20	2 500	95	45	120	30	M8	9	8	16	G1/4	14	20	56,5	15,0	12	27	3,2
80	25	4 000	95	45	140	36	M10	11	12	20	G1/4	14	20	72	21,0	18	27	3,5
100	25	6 300	120	55	150	40	M10	11	12	20	G1/4	14	20	89	21,0	19	59	5,8

¹⁾ Please note recommendations on page 197.

Features

- For continuous piston rod clamping
- Spring activated, pneumatically released
- Connection dimensions compatible with pneumatic cylinders according to ISO
- Direct mounting on pneumatic cylinders
- Holding forces transmissible in both directions of movement
- No application of force (lifting) to the piston rod required for release

Release pressure

The release pressure of the spring activated pneumatically released Clamping Unit KE ... FPK is min. 5 bar and max. 8 bar.

Brake Calipers

Selection of Brake Calipers

When selecting RINGSPANN Brakes, two criteria need to be considered:

- Is the selected combination of brake caliper/ brake disc capable of braking the torque requirement of the application?
- Can the brake disc transfer the frictional heat without damage to adjacent parts?

Calculation of the braking torque

Braking of rotating masses

The necessary braking torque results from the mass inertia moment relative to the brake shaft J_{red} . When braking to a stop $n_2 = 0$.

$$M_B = M_R = \frac{J_{red}}{t_B} \cdot \frac{n_1 - n_2}{9,55}$$

Braking of rotating masses with additional motor braking

If an additional braking torque M_{Bf} is available, e.g. from an electric motor with dynamic braking, then the formula for the necessary braking torque is:

$$M_B = M_R - M_{Bf} = \frac{J_{red}}{t_B} \cdot \frac{n_1 - n_2}{9,55} - M_{Bf}$$

Braking of chassis

The required braking torque for a deceleration is made up of the load torque M_L originating from the net weight G of the installation, the braking torque for the deceleration of the rotating masses M_R and the braking torque for decelerating the linear-moving masses M_V (referred to the braking shaft).

$$M_B = M_L + M_R + M_V$$

$$M_{Lmax} = (G \sin \gamma + F_W - F_F) \cdot \frac{D_L \cdot \eta}{2 \cdot i}$$

$$M_R = \frac{J_{red}}{t_B} \cdot \frac{n_1 - n_2}{9,55}$$

$$M_V = \frac{m}{t_B} \cdot \frac{n_1 - n_2}{38,25} \cdot \left(\frac{D_L}{i} \right)^2 \cdot \eta$$

After completing this calculation, check whether the braking torque M_B can be transmitted via the chassis wheel friction.

$$M_B < \mu_R \cdot m \cdot g \cdot \frac{D_L}{2}$$

Controlled braking for winding processes

The required braking torque varies between the value M_{Bi} with minimum winding diameter d_i and M_{Ba} with maximum winding diameter d_a .

$$M_{Bi} = \frac{F_S \cdot d_i}{2}$$

$$M_{Ba} = \frac{F_S \cdot d_a}{2}$$

Braking torques and parking torques

The braking torques given in this catalogue are dynamic braking torques. They only apply:

- When the brake linings have been run in,
- original RINGSPANN brake discs, or brake discs made from the recommended material are used and
- friction linings have been selected for the particular application.

If the disc brakes are used as holding brakes then the given brake torques are only applicable as parking torques if the above conditions are met. If running-in is not possible or if the running-in process is omitted, the braking torques given will not be achieved; torque reductions of up to 50% are possible. If static parking torques in accordance with the catalogue torques are required but without running-in, then special friction linings are needed. For such applications, please refer the matter to us for advice.

Continuous Slipping

Winding operations may require a variety of processes regarding tension of the wound material and winding speed. We therefore recommend an initial rough calculation of M_{Ba} and M_{Bi} .

Please send us the completed questionnaire on page 198 for a more accurate evaluation.

$$P_{Bi} = \frac{M_{Bi} \cdot n_i}{9550} \quad \text{or} \quad P_{Bi} = \frac{F_S \cdot d_i \cdot n_i}{19100}$$

$$P_{Ba} = \frac{M_{Ba} \cdot n_a}{9550} \quad \text{or} \quad P_{Ba} = \frac{F_S \cdot d_a \cdot n_a}{19100}$$

Formula symbols

d_i	[m]	Smallest diameter of roller	F_F	[N]	Tractional resistance on the chassis wheel	J_{red}	[kg m ²]	Reduced inertia moment
d_a	[m]	Largest diameter of roller				i	-	Gear ratio between chassis wheel and brake shaft
D	[mm]	Diameter of brake disc	F_H	[N]	Holding force	m	[kg]	Mass of complete chassis
D_L	[m]	Chassis wheel diameter	F_{Nenn}	[N]	Nominal holding force	M_B	[Nm]	Required braking torque
F	[N]	Holding force taking account of hydraulic oil and clamping duration	F_S	[N]	Tension on the winding material	M_{Bf}	[Nm]	Braking torque of the motor
F_a	[N]	Maximum axial force including dynamic forces occurring during operation	F_W	[N]	Wind reaction force on chassis	M_{Ba}	[Nm]	Braking torque for roller diameter d_a
			G	[N]	Total weight of chassis			

Clamping Units

Note for design and installation

Holding Force F_H

If the system is driven with hydraulic fluid, it is likely that after a certain operating time the piston rod will have a film of oil on it from the installation. Therefore the holding force is affected by the hydraulic oil being used.

The following applies to hydraulic oils H and HL, and to unalloyed oils:


$$F_{Nenn} = F_H$$

For hydraulic oils HLP and HL-XP this applies:

$$F_{Nenn} = F_H \cdot 0,8$$

The nominal holding force thus calculated is reached when the clamping time t between removal of the release pressure and the application of the load does not fall below a minimum value of 5 seconds. This applies to oils up to VG 100 with a minimum temperature of 20° C at the piston rod.

If the clamping time t is shorter, then the holding force F transmissible depending on viscosity should be taken from the diagram.

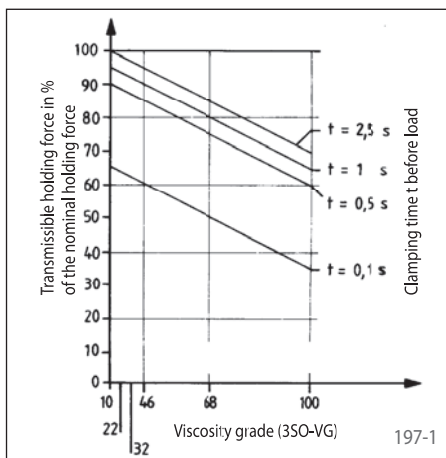

Holding force depending on oil viscosity and clamping period prior to load (temperature at the piston rod 20° C).

If the hydraulic oil has a large amount of EP additives (eg V 6710, DH 46) the nominal holding force can fall below 80% of the table value. In such a case it would be necessary to carry out field tests. **Solid lubricants like MoS₂, Graphite or Teflon should never be allowed near the clamping position.**

Safety factor

$$S = \frac{F}{F_a}$$

Positioning accuracy

Clamping is effected without any axial movement between rod and clamping unit.

Under axial force F_H an axial shift of up to 0,1 mm may occur in hydraulically released Clamping Units and up to 0,05 mm in pneumatically released Clamping Units between the rod and the clamping unit. This shift is reversed when pressure is released.

The rod to be clamped

The rod to be clamped should be made of material with a tensile strength of at least 600 N/mm² (e. g. C 45). It must be hard chromium plated or surface hardened and ground. The diameter must be designed with fit f7 in hydraulically released Clamping Units and with fit h8 in pneumatically released Clamping Units and a peak-to-valley height of $R_t = 5 \mu m$. With normal use the maximum pressure at the point of clamping between the piston rod and the clamping unit is 150 N/mm².

Sealing and Centering

Hydraulically released Clamping Units

are equipped with a rod gasket and stripper on the cover side.

A seal against waste oil should be provided by the customer on the side of the machine or cylinder where the clamping connection is to be located.

Pneumatically released Clamping Units

are equipped with strippers on both sides.

In order to ensure a lasting and troublefree operation and to avoid damage to the rod to be clamped, the exact concentricity of the bar towards the machine centering must be kept. (Max. circular runout 0,04 mm.)

Release to facilitate Mounting







To insert the rod, hydraulic or pneumatic pressure is applied on the clamping unit.

Special Types

If special types with a higher positioning accuracy, higher holding forces or lower release pressures are required, please let us have your enquiries together with the completed questionnaire on the page 199.

M_{Bi}	[Nm]	Braking torque for roller diameter d_i	n_1	[min ⁻¹]	Speed before braking	P_{Bi}	[kW]	Brake power with winding diameter d_i
M_L	[Nm]	Load torque	n_2	[min ⁻¹]	Speed after braking	t_B	[s]	Braking time
M_{Lmax}	[Nm]	Maximum load torque	n_i	[min ⁻¹]	Speed at d_i	γ	[°]	Angle of inclination
M_R	[Nm]	Deceleration torque of rotating masses	n_a	[min ⁻¹]	Speed at d_a	η	-	Gear efficiency – if known, calculation with $\eta=0,85$ is advised
M_V	[Nm]	Deceleration torque of linear moving masses	P_B	[kW]	Brake power generated by application, average with one braking cycle			
			P_{Ba}	[kW]	Brake power with winding diameter d_a	μ_R		Roller friction value on the chassis wheel

Please photocopy or use the PDF-File from our website!

Company: Address: Phone: Fax:	Department: Name: Enquiry Ref.: Date: E-mail:				
1. Application ☐ Stopping brake ☐ Control brake ☐ Holding brake					
2. Function <table style="width: 100%; border: none;"> <tr> <td style="width: 33%; vertical-align: top;"> Activation: ☐ spring ☐ pneumatically ☐ electromagnetically ☐ hydraulically ☐ manually with threaded spindle ☐ manually with Pull Cable </td> <td style="width: 33%; vertical-align: top;"> Release: ☐ pneumatically ☐ hydraulically ☐ electromagnetically ☐ electrohydraulically ☐ manually with Pull Cable ☐ spring ☐ spring ☐ spring ☐ non-releasing ☐ manually with threaded spindle ☐ manually with Pull Cable </td> <td style="width: 33%; vertical-align: top;"> Existing pressure: bar bar bar bar </td> </tr> </table>		Activation: ☐ spring ☐ pneumatically ☐ electromagnetically ☐ hydraulically ☐ manually with threaded spindle ☐ manually with Pull Cable	Release: ☐ pneumatically ☐ hydraulically ☐ electromagnetically ☐ electrohydraulically ☐ manually with Pull Cable ☐ spring ☐ spring ☐ spring ☐ non-releasing ☐ manually with threaded spindle ☐ manually with Pull Cable	Existing pressure: bar bar bar bar	
Activation: ☐ spring ☐ pneumatically ☐ electromagnetically ☐ hydraulically ☐ manually with threaded spindle ☐ manually with Pull Cable	Release: ☐ pneumatically ☐ hydraulically ☐ electromagnetically ☐ electrohydraulically ☐ manually with Pull Cable ☐ spring ☐ spring ☐ spring ☐ non-releasing ☐ manually with threaded spindle ☐ manually with Pull Cable	Existing pressure: bar bar bar bar			
3. Friction block wear <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;"> Adjustment of brake ☐ Automatic ☐ Manual </td> <td style="width: 50%;"> Control required? ☐ Yes ☐ No </td> </tr> </table>		Adjustment of brake ☐ Automatic ☐ Manual	Control required? ☐ Yes ☐ No		
Adjustment of brake ☐ Automatic ☐ Manual	Control required? ☐ Yes ☐ No				
4. The following safety rules must be observed					
5. Type of machine					
6. Part to be braked					
7. Technical Data <table style="width: 100%; border: none;"> <tr> <td style="width: 33%; vertical-align: top;"> Stopping brake: Required braking torque Nm Required braking time s Reduced mass inertia moment to be braked kgm² Weight of linear masses to be braked kg Transmission up to brake shaft i Driving speed v m/s Chassis wheel diameter D_R mm Angle of inclination γ ° Speed before braking n₁ min⁻¹ Speed after braking n₂ min⁻¹ Idling speed n min⁻¹ Braking cycles per hour z h⁻¹ </td> <td style="width: 33%; vertical-align: top;"> Control brake: Tension on winding material F_S N Speed of material v m/s Max. winding diameter d_a m Min. winding diameter d_i m Length of feed reels L m Material to be wound Duration of operation t s </td> <td style="width: 33%; vertical-align: top;"> Holding brake: Holding torque Nm Please note the information given under braking torques and parking torques on page 196. </td> </tr> </table>		Stopping brake: Required braking torque Nm Required braking time s Reduced mass inertia moment to be braked kgm ² Weight of linear masses to be braked kg Transmission up to brake shaft i Driving speed v m/s Chassis wheel diameter D _R mm Angle of inclination γ ° Speed before braking n ₁ min ⁻¹ Speed after braking n ₂ min ⁻¹ Idling speed n min ⁻¹ Braking cycles per hour z h ⁻¹	Control brake: Tension on winding material F _S N Speed of material v m/s Max. winding diameter d _a m Min. winding diameter d _i m Length of feed reels L m Material to be wound Duration of operation t s	Holding brake: Holding torque Nm Please note the information given under braking torques and parking torques on page 196.	
Stopping brake: Required braking torque Nm Required braking time s Reduced mass inertia moment to be braked kgm ² Weight of linear masses to be braked kg Transmission up to brake shaft i Driving speed v m/s Chassis wheel diameter D _R mm Angle of inclination γ ° Speed before braking n ₁ min ⁻¹ Speed after braking n ₂ min ⁻¹ Idling speed n min ⁻¹ Braking cycles per hour z h ⁻¹	Control brake: Tension on winding material F _S N Speed of material v m/s Max. winding diameter d _a m Min. winding diameter d _i m Length of feed reels L m Material to be wound Duration of operation t s	Holding brake: Holding torque Nm Please note the information given under braking torques and parking torques on page 196.			
8. Mounting of brake to the machine <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; text-align: center;"> ☐ Parallel to brake disc  </td> <td style="width: 50%; text-align: center;"> ☐ Right-angled to brake disc  </td> </tr> </table>		☐ Parallel to brake disc 	☐ Right-angled to brake disc 		
☐ Parallel to brake disc 	☐ Right-angled to brake disc 				
9. Brake disc <table style="width: 100%; border: none;"> <tr> <td style="width: 25%;"> Required disc diameter mm Max. permissible disc diameter mm </td> <td style="width: 25%;"> ☐ Form F, without bore or roughbored ☐ Form F, with bore d_F^{H7} mm </td> <td style="width: 25%;"> ☐ Form B, without bore or roughbored ☐ Form B, with bore d_B^{H7} with keyway mm </td> <td style="width: 25%;"> ☐ Form S with Shrink Disc RLK 608 for clamping diameter d_S mm </td> </tr> </table>		Required disc diameter mm Max. permissible disc diameter mm	☐ Form F, without bore or roughbored ☐ Form F, with bore d _F ^{H7} mm	☐ Form B, without bore or roughbored ☐ Form B, with bore d _B ^{H7} with keyway mm	☐ Form S with Shrink Disc RLK 608 for clamping diameter d _S mm
Required disc diameter mm Max. permissible disc diameter mm	☐ Form F, without bore or roughbored ☐ Form F, with bore d _F ^{H7} mm	☐ Form B, without bore or roughbored ☐ Form B, with bore d _B ^{H7} with keyway mm	☐ Form S with Shrink Disc RLK 608 for clamping diameter d _S mm		
10. Installation conditions <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;"> Ambient temperature from °C to °C </td> <td style="width: 50%;"> Other information (e. g. special ambient conditions) </td> </tr> </table>		Ambient temperature from °C to °C	Other information (e. g. special ambient conditions)		
Ambient temperature from °C to °C	Other information (e. g. special ambient conditions)				
11. Estimated requirement <table style="width: 100%; border: none;"> <tr> <td style="width: 33%;"> pieces (one off application) </td> <td style="width: 33%;"> pieces/month </td> <td style="width: 33%;"> pieces/year </td> </tr> </table>		 pieces (one off application)	 pieces/month	 pieces/year	
..... pieces (one off application)	 pieces/month	 pieces/year			

[illegible]

Germany

RINGSPANN GmbH

Schaberweg 30-38, 61348 Bad Homburg, Germany
+49 6172 2750
info@ringspann.de • www.ringspann.de

RINGSPANN RCS GmbH

Hans-Mess-Straße 7, 61440 Oberursel, Germany
+49 6172 67 68 50
info@ringspann-rcs.de • www.ringspann-rcs.de

France

SIAM - RINGSPANN S.A.

23 rue Saint-Simon, 69009 Lyon, France
+33 478 83 59 01
info@siam-ringspann.fr • www.ringspann.fr

Great Britain, Ireland

RINGSPANN (U.K.) LTD.

3, Napier Road, Bedford MK41 0QS, Great Britain
+44 1234 34 25 11
info@ringspann.co.uk • www.ringspann.co.uk

Italy

RINGSPANN Italia S.r.l.

Via A.D. Sacharov, 13, 20812 Limbiate (MB), Italy
+39 02 93 57 12 97
info@ringspann.it • www.ringspann.it

Netherlands, Belgium, Luxembourg

RINGSPANN Benelux B.V.

Nieuwenkampsmaten 6-15, 7472 DE Goor,
Netherlands • +31 547 26 13 55
info@ringspann.nl • www.ringspann.nl

Austria, Hungary, Slovenia

RINGSPANN Austria GmbH

Triesterstraße 21, 2620 Neunkirchen, Austria
+43 2635 62446
info@ringspann.at • www.ringspann.at

Poland

Radius-Radpol Wiecheć Sp.J.

Ul. Pasjonatów 3, 62-070 Dąbrowa, Poland
+48 61 814 39 28 • info@radius-radpol.com.pl
www.radius-radpol.com.pl

Romania, Bulgaria, Moldova

S.C. Industrial Seals and Rolls S.R.L.

Str. Depozitelor, No. 29, 110078 Pitesti, Romania
+40 0751 22 82 28
mihai@isar.com.ro • www.isar.com.ro

Russia, Belarus, Kazakhstan

RINGSPANN Office

Pod'jermnaja Street 12, Building 1, Floor 4,
Office 426, 109052 Moscow, Russia
+7 495 911 86 48
Denis.Kalashnikov@ringspann.com
www.ringspann.com.ru

Sweden, Finland, Denmark,

Norway, Baltic states

RINGSPANN Nordic AB

Flottiljgatan 69, 721 31 Västerås, Sweden
+46 156 190 98
info@ringspann.se • www.ringspann.se

Switzerland

RINGSPANN AG

Sumpfstrasse 7, P.O. Box, 6303 Zug,
Switzerland • +41 41 748 09 00
info@ringspann.ch • www.ringspann.ch

Spain, Portugal

RINGSPANN IBERICA S.A.

C/Uzbina, 24-Nave E1, 01015 Vitoria, Spain
+34 945 22 77 50
info@ringspann.es • www.ringspann.es

Czech Republic, Slovakia

Ing. Petr Schejbal

Mezivřší 1444/27, 14700 Prag, Czech Republic
+420 222 96 90 22
Petr.Schejbal@ringspann.cz • www.ringspann.com

Ukraine

"START-UP" LLC.

Saltivske Hwy, 43, letter G-3, office 101,
Kharkiv 61038, Ukraine • +38 057 717 03 04
start-up@start-up.kh.ua • www.start-up.kh.ua

Asia

Australia, New Zealand

RINGSPANN Australia Pty Ltd

Unit 5, 13A Elite Way, Carrum Downs Vic 3201,
Australia • +61 3 9069 0566
info@ringspann.com.au • www.ringspann.com.au

China

RINGSPANN Power Transmission (Tianjin) Co., Ltd.

No. 21 Gaoyan Rd., Binhai Science and Technology
Park, Binhai Hi-Tech Industrial, Development Area,
Tianjin, 300458, P.R. China • +86 22 5980 31 60
info.cn@ringspann.cn • www.ringspann.cn

India, Bangladesh, Nepal

RINGSPANN Power Transmission India Pvt. Ltd.

GAT No: 679/2/1, Village Kuruli, Taluka Khed, Chakan-
Alandi Road, Pune - 410501, Maharashtra, India
+91 21 35 67 75 00 • info@ringspann-india.com
www.ringspann-india.com

Singapore, Taiwan, ASEAN

RINGSPANN Singapore Pte. Ltd.

143 Cecil Street, #17-03 GB Building,
Singapore 069542 • +65 9633 6692
info@ringspann.sg • www.ringspann.sg

South Korea

RINGSPANN Korea Ltd.

33 Gojae-17 Ghil Dongnam-gu, 31187 Cheonan-si
Chungnam, South Korea • +82 10 54 961 368
info@ringspann.kr • www.ringspann.kr

America

Brazil

Antares Acoplamentos Ltda.

Rua Evaristo de Antoni, 1222, Caxias do Sul, RS,
CEP 95041-000, Brazil • +55 54 32 18 68 00
vendas@antaresacoplamentos.com.br
www.antaresacoplamentos.com.br

USA, Canada, Mexico, Chile, Peru

RINGSPANN Corporation

10550 Anderson Place, Franklin Park, IL 60131, USA
+1 847 678 35 81
info@ringspanncorp.com • www.ringspanncorp.com

Africa and Middle East

Egypt

Shofree Trading Co.

218 Emtedad Ramsis 2, 2775 Nasr City, Cairo, Egypt
+20 2 2081 2057
info@shofree.com • www.ringspann.com

Israel

G.G. Yarom Rolling and Conveying Ltd.

6, Hamaktsh Str., 58810 Holon, Israel
+972 3 557 01 15
noam_a@gg.co.il • www.ringspann.com

South Africa, Sub-Saharan

RINGSPANN South Africa (Pty) Ltd.

96 Plane Road Spartan, Kempton Park,
P.O. Box 8111 Edenglen 1613, South Africa
+27 11 394 18 30
info@ringspann.co.za • www.ringspann.co.za

Iran

Persia Robot Machine Co. Ltd.

4th Floor, No 71, Mansour St, Motahari Avenue,
Tehran 15957, Iran • +98 21 88 70 91 58-62
info@persiarobot.com • www.ringspann.com

Maghreb, West Africa

SIAM - RINGSPANN S.A.

23 rue Saint-Simon, 69009 Lyon, France
+33 478 83 59 01
info@siam-ringspann.fr • www.ringspann.fr