




| | |
|-----------------------|------------------------|
| Bore Diameter (d) | 15 mm |
| O.D. (D) | 24 mm |
| Width (B) | 5 mm |
| Closure | Metallic Shield |
| Brand | TPI |
| Precision | Abec 1 |
| Radial Clearance | C3 |
| Lubrication | L627 Polyrex EM Grease |
| Dynamic Load(Cr) | 467.60 lbs |
| Static Load Cap (C0r) | 283.26 lbs |
| Ball Material | 52100 Chrome Steel |
| Ring Material | 52100 Chrome Steel |
| Series | 6802 |

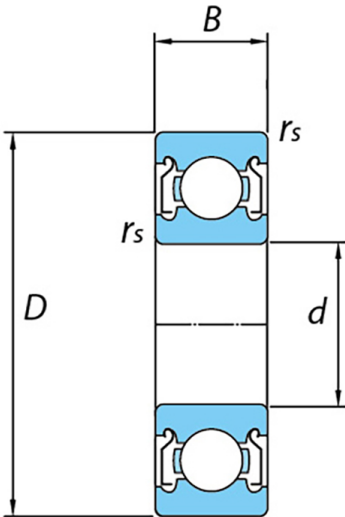

Shielded type (ZZ)

| COMPONENT | METRIC SERIES SHIELDED | |
|--|------------------------|--|
| 6802ZZ/LT112 TPI 15 Mm X 24 Mm X 5 Mm, Single Row Radial, Deep Groove Ball Ball Bearing, Two Metal Shields | UNIT | |
| | Metric | |
| | SHEET | |



Pacific International Bearing, Inc.
33258 Central Ave, Union City, CA 94587
1-800-228-8895, 510-512-7000,
info@pibsales.com
www.pibsales.com

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. PIB makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.