




O.D. (D):	2.250 in (57.2 mm)	Seating Torque:	16 Nm
Brand:	Ruland	Balanced Design:	Yes
Note:	Stainless steel hubs are available upon request.	B1 Max Shaft Penetration:	1.085 in
Static Torque:	450 lb-in	Keyway (K2):	1/8 in
Hex Wrench Size:	5.0 mm	Material:	Aluminum
Maximum Speed:	10000 RPM	Bore (B1):	0.5000 in
Temperature:	-40°F to 200°F (-40°C to 93°C)	Bore (B2):	0.5000 in
Country of Origin:	USA	Keyway:	Yes
Shaft Tolerance:	+0.0000 in / -0.0005 in	Keyway (K1):	1/8 in
UNSPC:	31163008	RoHS3:	Compliant
Conflict Minerals:	Compliant	B2 Max Shaft Penetration:	1.085 in
Tariff Code:	8483.60.8000	Length (L):	2.313 in (58.8 mm)
Dynamic Torque Non-Reversing:	225 lb-in	Bore Tolerance:	+0.001 in / -0.000 in
Dynamic Torque Reversing:	112.5 lb-in	Screw Material:	Alloy Steel
Torsional Stiffness:	1000 lb-in/Deg	Screw Finish:	Black Oxide
Angular Misalignment:	1.0 deg	Forged Clamp Screw:	M6
Parallel Misalignment:	0.00 in	ISO 9001:2015:	Certified
Axial Motion:	0.015 in	REACH:	Compliant
Number of Screws:	2 ea	Recommended Hex Key:	Metric Hex Keys

COMPONENT

Disc Coupling - Single

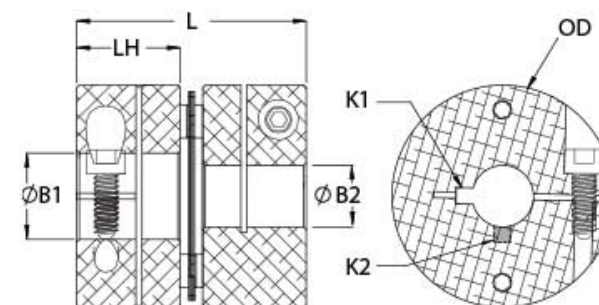

Pacific International Bearing, Inc.
33258 Central Ave, Union City, CA 94587
1-800-228-8895, 510-512-7000,
info@pibsales.com
www.pibsales.com

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. PIB makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.

DCSK36-8-8-A
Ruland
0.5000" X 0.5000" Bores, 2.250" Od, And
2.313" Length, 1/8" X 1/8" Keyways, Clamp
Single Disc Coupling, Anodized Aluminum
Hubs, Stainless Steel Disc Springs

UNIT
Inch
SHEET