




Bore Diameter (d)	.2500 in
O.D. (D)	.6250 in
Width (B)	.1960 in
Closure	Metallic Shield Pressed
Brand	NMB
Precision	Abec 3
Lubrication	LY121 Kyodo Yushi SRL Grease
Radial Clearance	P25 (Standard)
Ball Material	AISI 440C Stainless Steel
Ring Material	AISI 440C Stainless Steel
Dynamic Load (Cr)	331 lbs
Static Load Cap (C0r)	134 lbs
Series	R4

COMPONENT	INCH SERIES SHIELDED	
DDR-4ZZR A3P25LY48 NMB .2500in X .6250in X .1960in, Miniature Instrument Deep, Groove Radial Ball Bearing, Non-removable Metallic Shield	UNIT	
	INCH	
	SHEET	

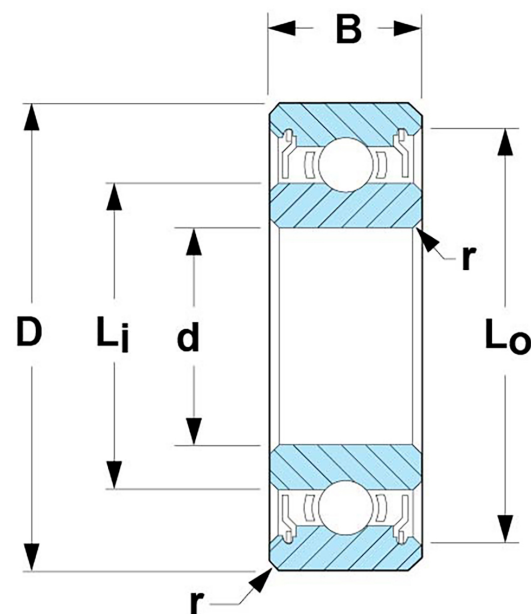

Pacific International Bearing, Inc.
33258 Central Ave, Union City, CA 94587
1-800-228-8895, 510-512-7000,
info@pibsales.com
www.pibsales.com

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. PIB makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.