




5/32" balls

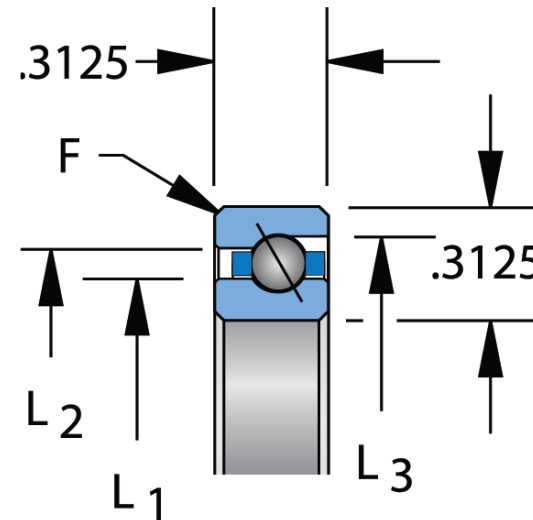

$$F = .040^4$$

|                   |                            |
|-------------------|----------------------------|
| Bore Diameter (d) | 4.9998 in                  |
| O.D. (D)          | 5.6253 in                  |
| Width (B)         | .3125 in                   |
| Brand             | KAYDON                     |
| Closure           | Open                       |
| L1                | 5.2310 in                  |
| L2                | 5.3930 in                  |
| Ball Material     | Corrosion Resistant Plated |
| Ring Material     | Corrosion Resistant Plated |



Pacific International Bearing, Inc.  
33258 Central Ave, Union City, CA 94587  
1-800-228-8895, 510-512-7000,  
info@pibsales.com  
www.pibsales.com

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. PIB makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.

| COMPONENT                                                                                                                                              | Thin Section |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--|
| <b>NB050AR0</b><br><b>KAYDON</b><br>4.9998in X 5.6253in X .3125in, Thin Section<br>Bearing, Angular Contact Type A,<br>Endurakote Anti-corrosion, Open | UNIT         |  |
|                                                                                                                                                        | Inch         |  |
|                                                                                                                                                        | SHEET        |  |