


1600 SERIES SINGLE ROW BALL BEARING (SHIELDED/SEALED)



COMMERICAL INCH SERIES (SHIELDED/SEALED)				LOAD RATINGS (Lbs.)		
BEARING NUMBER	BORE d	OUTER DIAMETER D	WIDTH B	DYN Cr	STATIC Cor	BRG. WGT. LBS.
1601	.1875	.6875	.2500	294	146	0.009
1602	.2500	.6875	.2500	294	146	0.014
1603	.3125	.8750	.2812	464	228	0.021
1604	.3750	.8750	.2812	464	228	0.019
1605	.3125	.9062	.3125	464	228	0.037
1606	.3750	.9062	.3125	464	228	0.048
1607	.4375	.9062	.3125	400	229	0.049
1614	.3750	1.1250	.3750	400	229	0.077
1615	.4375	1.1250	.3750	400	229	0.071
1616	.5000	1.1250	.3750	400	229	0.066
1620	.4375	1.3750	.4375	600	354	0.100
1621	.5000	1.3750	.4375	600	354	0.106
1622	.5625	1.3750	.4375	600	354	0.101
1623	.6250	1.3750	.4375	600	354	0.088
1628	.6250	1.6250	.5000	738	454	0.159
1630	.7500	1.6250	.5000	738	454	0.143
1633	.6250	1.7500	.5000	738	454	0.203
1635	.7500	1.7500	.5000	738	454	0.187
1638	.7500	2.0000	.5625	1100	709	0.265
1640	.8750	2.0000	.5625	1100	709	0.247
1641	1.0000	2.0000	.5625	1100	709	0.221
1652	1.2500	2.5000	.6250	1306	857	0.463
1654	1.2500	2.5000	.6250	1306	857	0.419
1657	1.2500	2.5625	.6875	1528	1021	0.474
1658	1.3125	2.5625	.6875	1528	1021	0.441

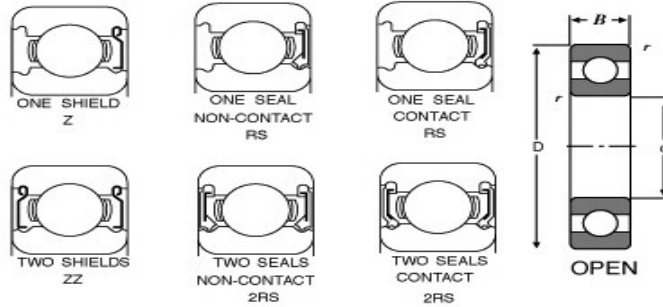