


## R- SERIES SINGLE ROW BALL BEARINGS (SHIELDED)

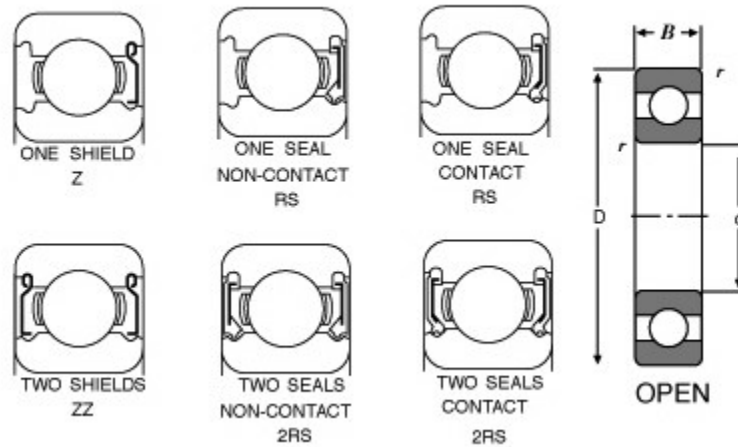

RADIAL SHIELDED BEARINGS INCH SERIES				LOAD RATINGS (Lbs.)		
BEARING NUMBER	BORE d	OUTER DIAMETER D	WIDTH B	DYN Cr	STATIC Cor	BRG. WGT. GMS.
R0	.0469	.1562	.0937	35	11	0.15
R1	.0550	.1875	.1094	60	18	0.20
R1-4	.0781	.2500	.1406	75	24	0.50
R133	.0937	.1875	.0937	42	13	0.10
R1-5	.0937	.3125	.1406	128	42	0.85
R144	.1250	.2500	.1094	64	22	0.35
R2-5	.1250	.3125	.1406	128	42	0.70
R2-6	.1250	.3750	.1406	128	42	1.30
R-2	.1250	.3750	.1562	146	51	1.30
R155	.1562	.3125	.1250	88	33	0.65
R156	.1875	.3125	.1250	88	33	0.50
R166	.1875	.3750	.1250	161	62	0.90
R-3	.1875	.5000	.1960	295	110	2.60
R168	.2500	.3750	.1250	95	46	0.65
R188	.2500	.5000	.1875	187	84	1.90
R-4	.2500	.6250	.1960	331	134	4.40
R-4A	.2500	.7500	.2812	542	205	8.70
R1810	.3125	.5000	.1562	198	95	1.60
R620	.3750	.6250	.1562	205	84	2.60
R-6	.3750	.8750	.2812	747	313	8.80
R824	.5000	.7500	.1562	238	112	3.30
R1028	.6250	.8750	.1562	247	126	3.90
R1232	.7500	1.0000	.1562	271	154	4.50