


| Closure | Metallic Shield |
|-----------------------------|------------------------------|
| Ring Material | 52100 Chrome Steel |
| Ball Material | 52100 Chrome Steel |
| Precision | ABEC 1 |
| Radial Clearance | M3 = .003008mm |
| Lubrication | LY121 Kyodo Yushi SRL Grease |
| Dynamic Load Capacity (Cr): | 588 lbs |
| Static Load Capacity (Cor): | 237 lbs |
| Max Speed Grease x 1000 rpm | 38 |
| Max Speed Oil x 1000 rpm | 45 |
| Ball Compliment No. Z | 7 |
| Ball Compliment Size Dw | 3.5 mm |



COMPONENT

METRIC SERIES SHIELDED

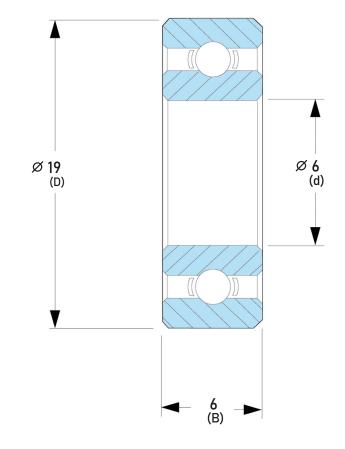

Pacific International Bearing, Inc. 33258 Central Ave, Union City, CA 94587 1-800-228-8895, 510-512-7000, info@pibsales.com www.pibsales.com www.pibsales.store

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. PIB makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.

626-ZZM3MTA1LY121

NMB BRAND

6 mm x 19 mm x 6 mm, Miniature Instrument Deep, Groove Radial Ball Bearing, Two Metal Shields UNIT

mm

SHEET