

Alinabal Motion Transfer Devices

28 Woodmont Road


Milford, CT 06460 US

Tel: 203.877.3241 • Fax: 203.877.3745

Email: info@alinabalmtd.com • Website: www.alinabalmtd.com

Steel Pro-Line Rod Ends

Steel housing and ball, fully staked construction with carbon fiber reinforced nylon race.

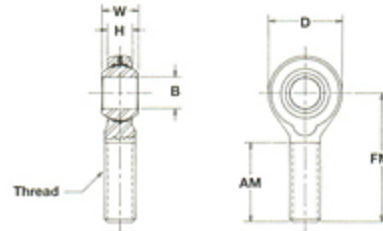

Results 1 - 24 of 24

Item #	Thread Type	Ball Bore B	Ball Width W	Base to Center FF/FM	Head Diameter D	Thread UNF-2A Class	Ultimate (Radial) Static Load Rating
PRO-5M-G	Male Right Hand Thread	0.3125 in	0.437 in	1.875 in	0.8750 in	5/16"-24	2700 lb
PRO-6M-G	Male Right Hand Thread	0.3750 in	0.500 in	1.938 in	1.0000 in	3/8"-24	3200 lb
PRO-7M-G	Male Right Hand Thread	0.4375 in	0.562 in	2.125 in	1.1250 in	7/16"-20	3750 lb
PRO-8M-G	Male Right Hand Thread	0.5000 in	0.625 in	2.438 in	1.3120 in	1/2"-20	5800 lb
PRO-10M-G	Male Right Hand Thread	0.6250 in	0.750 in	2.625 in	1.5000 in	5/8"-18	7050 lb
PRO-12M-G	Male Right Hand Thread	0.7500 in	0.875 in	2.875 in	1.7500 in	3/4"-16	8800 lb
PROL-5M-G	Male Left Hand Thread	0.3125 in	0.437 in	1.875 in	0.8750 in	5/16"-24	2700 lb
PROL-6M-G	Male Left Hand Thread	0.3750 in	0.500 in	1.938 in	1.0000 in	3/8"-24	3200 lb
PROL-7M-G	Male Left Hand Thread	0.4375 in	0.562 in	2.125 in	1.1250 in	7/16"-20	3750 lb
PROL-8M-G	Male Left Hand Thread	0.5000 in	0.625 in	2.438 in	1.3120 in	1/2"-20	5800 lb
PROL-10M-G	Male Left Hand Thread	0.6250 in	0.750 in	2.625 in	1.5000 in	5/8"-18	7050 lb
PROL-12M-G	Male Left Hand Thread	0.7500 in	0.875 in	2.875 in	1.7500 in	3/4"-16	8800 lb
PRO-5F-G	Female Right Hand Thread	0.3125 in	0.437 in	1.375 in	0.8750 in	5/16"-24	2800 lb

PRO-6F-G	Female Right Hand Thread	0.3750 in	0.500 in	1.625 in	1.0000 in	3/8"-24	3250 lb
PRO-7F-G	Female Right Hand Thread	0.4375 in	0.562 in	1.812 in	1.1250 in	7/16"-20	3800 lb
PRO-8F-G	Female Right Hand Thread	0.5000 in	0.625 in	2.125 in	1.3120 in	1/2"-20	6400 lb
PRO-10F-G	Female Right Hand Thread	0.6250 in	0.750 in	2.500 in	1.5000 in	5/8"-18	7100 lb
PRO-12F-G	Female Right Hand Thread	0.7500 in	0.875 in	2.875 in	1.7500 in	3/4"-16	9000 lb
PROL-5F-G	Female Left Hand Thread	0.3125 in	0.437 in	1.375 in	0.8750 in	5/16"-24	2800 lb
PROL-6F-G	Female Left Hand Thread	0.3750 in	0.500 in	1.625 in	1.0000 in	3/8"-24	3250 lb
PROL-7F-G	Female Left Hand Thread	0.4375 in	0.562 in	1.812 in	1.1250 in	7/16"-20	3800 lb
PROL-8F-G	Female Left Hand Thread	0.5000 in	0.625 in	2.125 in	1.3120 in	1/2"-20	6400 lb
PROL-10F-G	Female Left Hand Thread	0.6250 in	0.750 in	2.500 in	1.5000 in	5/8"-18	7100 lb
PROL-12F-G	Female Left Hand Thread	0.7500 in	0.875 in	2.875 in	1.7500 in	3/4"-16	9000 lb

Results 1 - 24 of 24